

③ threaded nut

① light fixture 1PCS

④ lock nut 1PCS

② hanging tube 1PCS

⑦ hanging tube 1PCS

⑧ chain 1PCS

⑨ canopy 1PCS

⑩ cap nut 2PCS

⑤ fabric lampshade 1PCS

⑥ metal frame 1PCS

⑬ hex key 1PCS

⑭ grub screw 3PCS

X 1PCS

X 1PCS

X 3PCS

X 3PCS

X 3PCS

X 3PCS



1.Let the wire of the fixture ① go through hanging tube ②, rotate to install the tube ② to the fixture, fasten it with grub screw ⑭ by rotate hex key ⑬.



2.Rotate to loosen lock nut ④ and remove out it.



3.Let the wire go through the lampshade ⑤ and lock nut ④, rotate to fix both parts to the fixture.

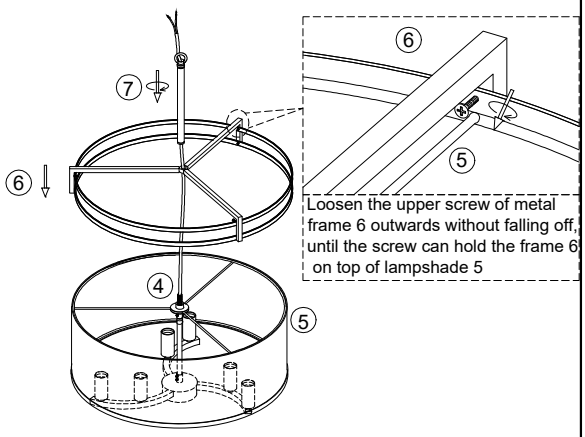

4.Loosen the upper screw of metal frame ⑥ outwards without falling off, until the screw can hold the frame ⑥ on top of lampshade ⑤, let the wire go through the metal frame ⑥ and hanging tube ⑦, rotate to fix both parts to the fixture.

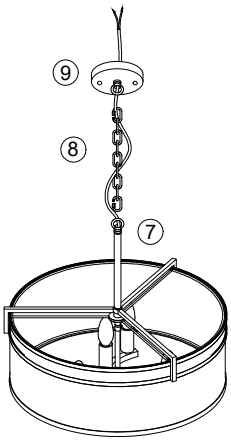

5.Hang the fixture to the canopy ⑨ with chain ⑧, let the wire go through the chain ⑧ and canopy ⑨.

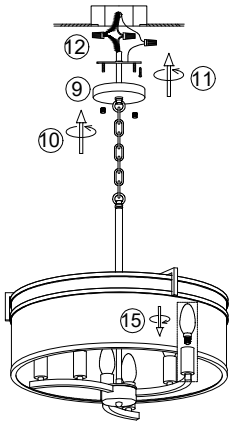

6.Install the bracket to the ceiling junction box with screw ⑪.
7.Connect the wire to your home line with cap connector ⑫.
8.Install the fixture to the bracket with cap nut ⑩.
9. Install the bulb ⑮.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !