

60 Inch Ceiling Fan

(Polished Nickel)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____




Product Information

Finish	Polished Nickel
Blade Finish	Black

Specifications

Number of Blades	3
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	3 Speed Wall Control Full Function
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188 MM X 25 MM
Motor Type	AC

Dimensions

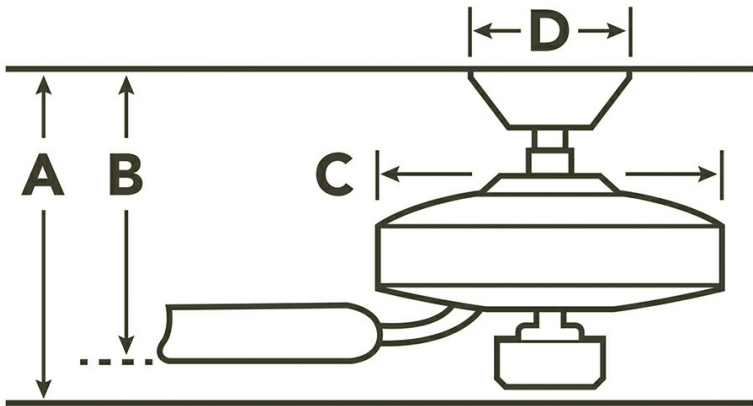

Downrod	A	B	C	D
1.00 OD X 4.50	17.75	14.00	7.75	7.75

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
# of Bulbs/LED Modules	1
Watts	77/26
Initial Lumens	1600
Glass Description	Clear Painted White Polycarbonate
Optional Light Kit Available	No
Kelvin Temperature	3000K
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Dry
--------------	-----

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Installation

The electrical junction box and support structure must be

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

60 Inch Ceiling Fan
(Polished Nickel)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Brushed Nickel	CLEAR PAINTED WHITE POLYCARBONATE	SILVER
Polished Nickel	CLEAR PAINTED WHITE POLYCARBONATE	BLACK
White	CLEAR PAINTED WHITE POLYCARBONATE	SILVER

Installation requirements	securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.