

### FAUCET DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design
- Hand-held shower includes vacuum breaker, drop ell, wall brackets, 69" metal hose and hardware
- Supplied with vandal resistant screws

### OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to limit the handle travel in the HOT direction
- Pressure balancing mechanism maintains selected discharge temperature to ± 3.6°

### FLOW

- 2.5 gpm (9.6 L/min) Hand-Held shower head

### CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:
- 8370HD\*: 1/2" CC connection without integral stops
- 8371HD\*: 1/2" CC connection with integral stops
- 8372HD\*: 1/2" IPS connection with integral stops
- 8373HD\*: 1/2" PEX connection with integral stops
- 8374HD\*: 1/2" CPVC connection with integral stops, \*Includes the 1222HD Brass Posi-Temp Cartridge
- Accommodates back to back installations


### STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

- **ADA** for lever handle

### WARRANTY

- Warranted for 5 years against material or manufacturing defects

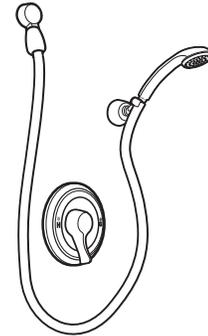


## Single-Handle Posi-Temp Handheld Shower System

Model: T8348



**NOTE:** Hand-held shower head with hose and vacuum breaker has been omitted from illustration for clarity.

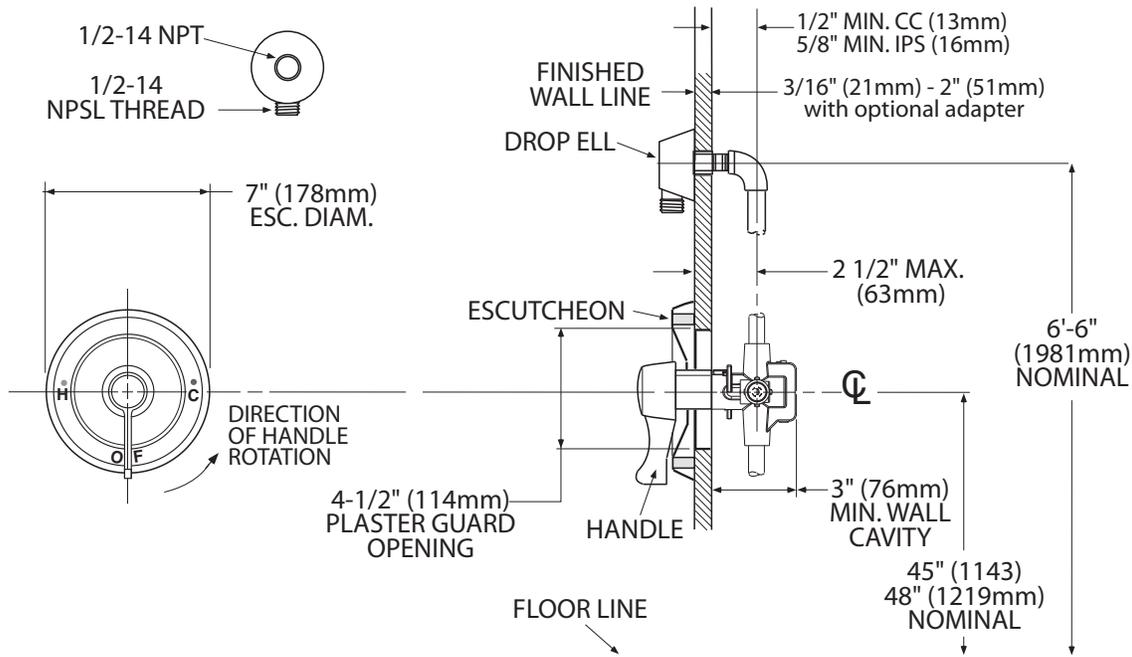

\*Refer to (ADAAG) guidelines or local codes for proper ADA installation.

### CRITICAL DIMENSIONS

(DO NOT SCALE)