

PAIR OF BOOKCASES
IVORY
ESPRESSO
PLANTATION OAK
CLASSIC MAHOGANY
GLAZED PINE
Assembly Instructions

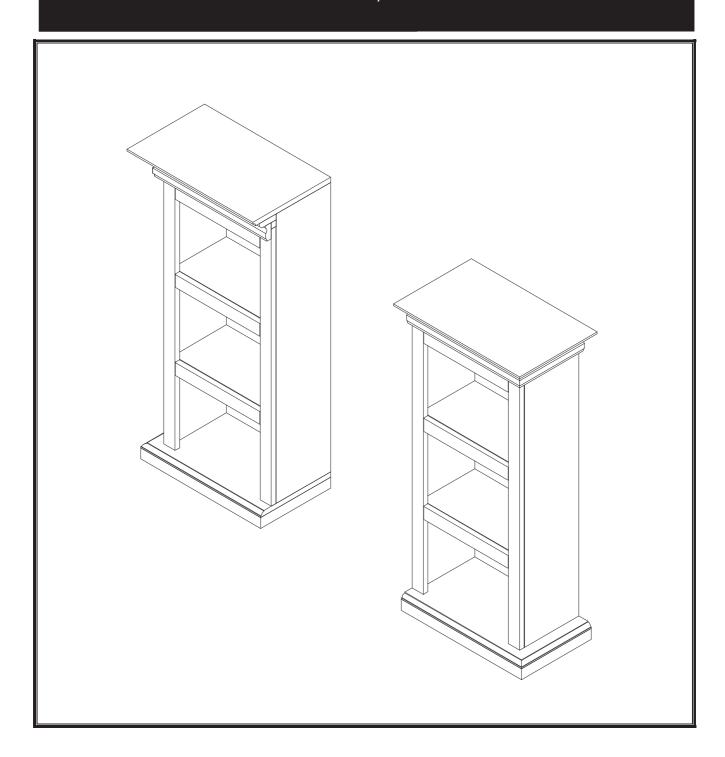

PAIR OF BOOKCASES Parts list

Parts List
Please review all parts and hardware before disposing of any packaging.
Call Customer Service if missing hardware. Do not return to store/retailer.
Using a screw that is too long will cause damage.


Using a screw that is too long will cause damage.
Before beginning assembly, separate each type of screw. Carefully study the screw diagrams below. You may receive extra hardware with your unit.

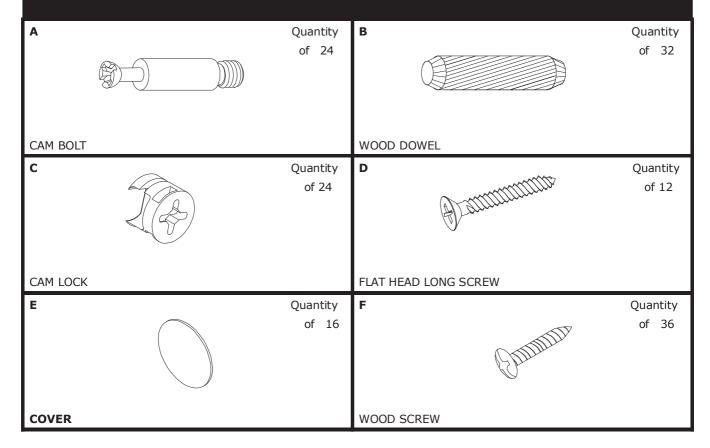

PAIR OF BOOKCASES Parts List

Please review all parts and hardware before disposing of any packaging. Call Customer Service if missing hardware. Do not return to store/retailer. Using a screw that is too long will cause damage.

Before beginning assembly, separate each type of screw. Carefully study the screw diagrams below. You may receive extra hardware with your unit.

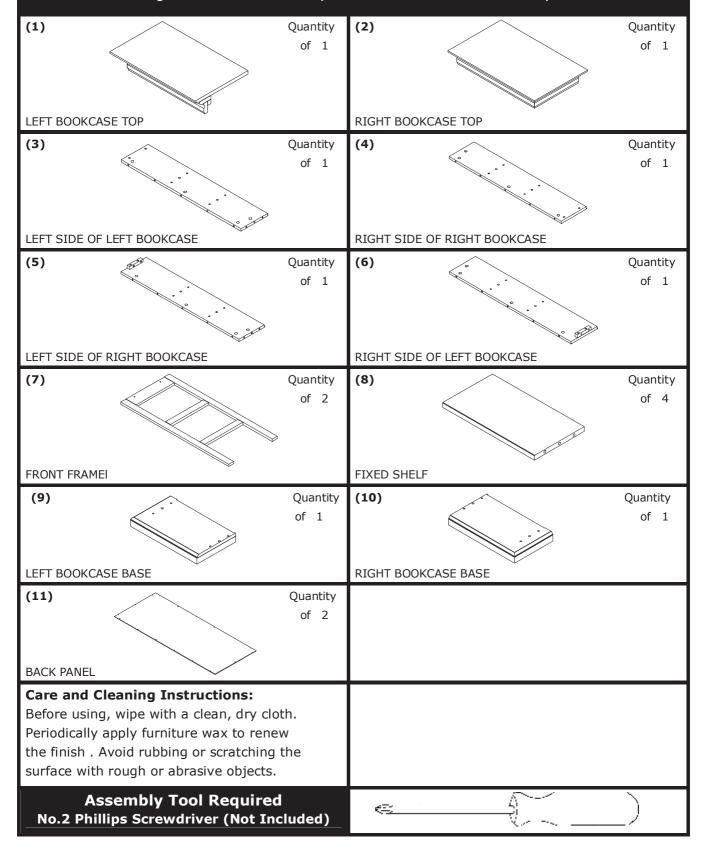

PAIR OF BOOKCASES **Assembly Instructions**

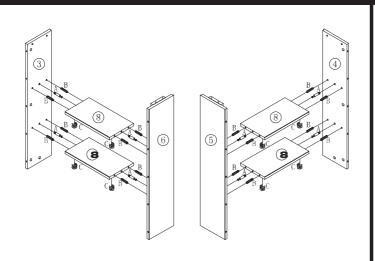


Figure 1

USE GLUE (F) TO FILL 1/4 CORRESPONDING HOLES OF LEFT/RIGHT SIDES OF BOOKCASES (3,4,5,6), INSERT 8PCS CAM-BOLTS (A), 16PCS WOOD DOWELS (B) INTO PREDRILLED HOLES ON INSIDES OF LEFT AND RIGHT SIDES OF BOOKCASES (3,4,5,6) AND FIT INTO CORRESPONDING HOLES ON ENDS OF FIXED SHELVES (8). INSERT 8PCS CAM-LOCKS (1) INTO BIG HOLES ON UNDERSIDE OF FIXED SHELVES (8) WITH SLOT FOR SCREWDRIVER FACING OUTWARD. ROTATE CAM-LOCKS (C) CLOCKWISE TO SECURE CAM-BOLTS (A). PUSH COVERS (E) INTO CAM-LOCKS (C). AS FIGURE 1 SHOWN.






Figure 2

INSERT 12PCS CAM-BOLTS (A), 8PCS WOOD DOWELS (B) INTO PREDRILLED HOLES ON BACK OF FRONT FRAMES (7) AND FIT INTO CORRESPONDING HOLES ON FRONT EDGES OF LEFT AND RIGHT SIDES OF BOOKCASES (3.4.5.6). INSERT 12PCS CAM-LOCKS (C) INTO BIG HOLES ON INSIDES OF LEFT AND RIGHT SIDES OF BOOKCASES (3.4.5.6) WITH SLOT FOR SCREWDRIVER FACING OUTWARD. ROTATE CAM-LOCKS (C) CLOCKWISE TO SECURE CAM-BOLTS A). PUSH COVERS (E) INTO CAM-LOCKS (C). AS FIGURE 2 SHOWN.

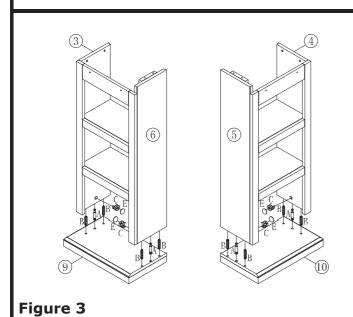


INSERT 4PCS CAM-BOLTS (A), 8PCS WOOD DOWELS (B) INTO PREDRILLED HOLES ON UPSIDE OF LEFT AND RIGHT BASES (9&10) AND FIT INTO CORRESPONDING HOLES ON BOTTOM EDGES OF LEFT AND RIGHT SIDES OF BOOKCASES (3,4,5,6). INSERT 4PCS CAM-LOCKS (C) INTO BIG HOLES ON INSIDES OF LEFT AND RIGHT SIDES OF BOOKCASE (3, 4, 5, 6) WITH SLOT FOR SCREWDRIVER FACING OUTWARD. ROTATE CAM-LOCKS (C) CLOCKWISE TO SECURE CAM-BOLTS (A). PUSH COVERS (E) INTO CAM-LOCKS (C). AS FIGURE 3 SHOWN.

PAIR OF BOOKCASES Assembly Instructions

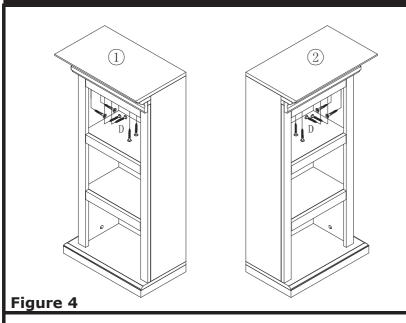


PLACE THE BOOKCASE TOPS
(1,2) ONTO TOP EDGES OF LEFT
AND RIGHT SIDES OF
BOOKCASES (3,4,5,6). INSERT
12PCS FLAT HEAD LONG SCREWS
(D) THROUGH PREDRILLED
HOLES ON PARTS (3, 4, 5, 6) AND
TIGHTEN INTO CORRESPONDING
HOLES ON UNDERSIDE OF
BOOKCASE TOPS (1.2). AS
FIGURE 4 SHOWN.



ATTACH THE BACK PANELS (11)
ONTO THE UNITS BY USING
36PCS WOOD SCREWS (G) AS
FIGURE 5 SHOWN.

Figure 5

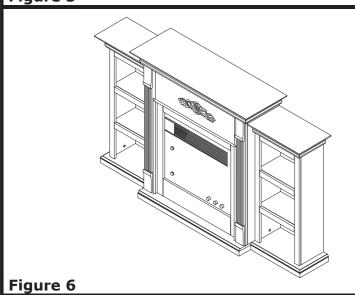

PLACE THE TERRI BOOKCASES BESIDE THE TERRI FIREPLACE.