



Loure® | K-14660-4

Tall single-handle bathroom sink faucet, 1.2 gpm

Features

- Single remote lever handle allows for both volume and temperature control
- Includes touch-activated drain
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- 2" (51 mm) diameter valve
- Ideal for vessel sink applications
- Coordinates with Loure faucets, accessories, and showering components to complete your bathroom
- Lower flow aerator options are available



Sustainability



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 23:58 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 5-1/4" (133 mm)

Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing


Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 23:58 - US-CA

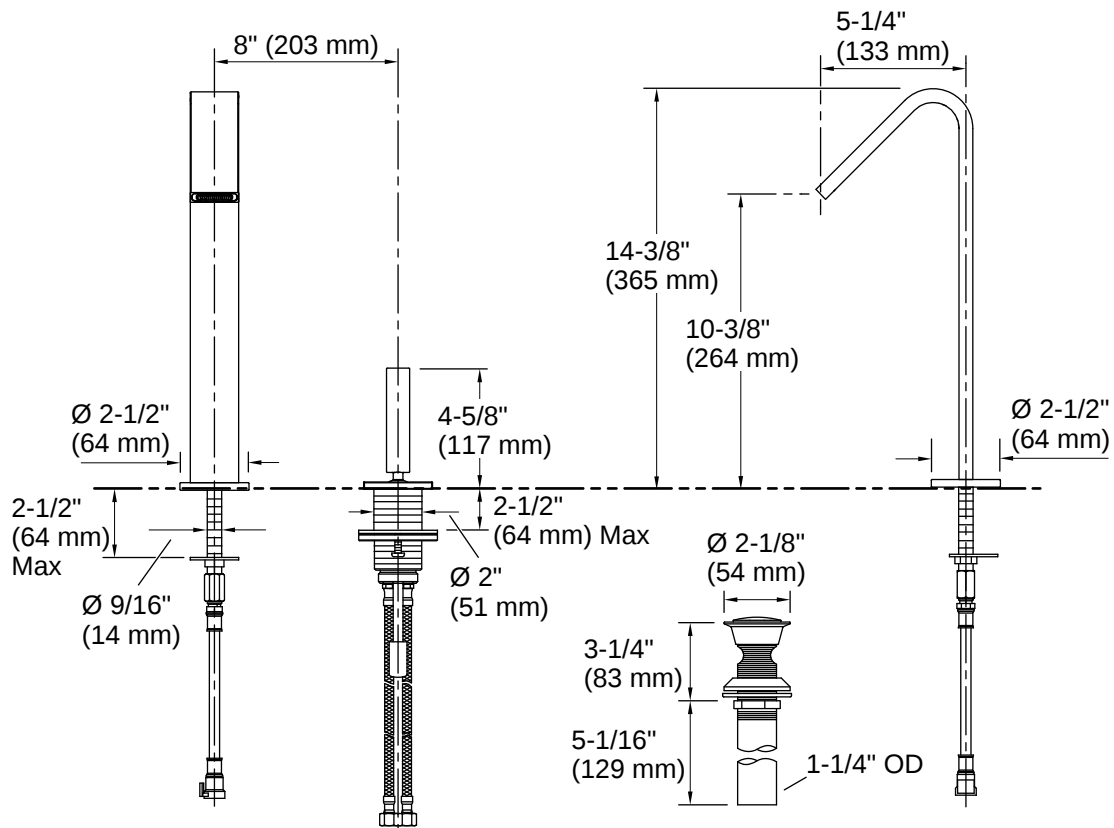

Installation

- Single-hole mounting
- Preattached flexible supply lines simplify installation

Installation Notes

Install this product according to the installation instructions.

NOTICE: Due to the non-standard 2" (51 mm) diameter of the remote valve, the remote valve cannot be mounted through a standard 1-3/8" (35 mm) faucet hole of a sink. Choose a sink without faucet holes, then mount the faucet and remote valve through the countertop. Refer to the countertop manufacturer's instructions for proper hole drilling.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 23:58 - US-CA