



Triton® | K-7435-K

Widespread commercial bathroom sink faucet with gooseneck spout and pop-up drain, requires handles

Features

- Quarter-turn washerless ceramic disc valves
- Pop-up drain with lift rod and tailpiece
- Standard aerator
- Variety of handle style options
- 5-1/4" (133 mm) gooseneck spout
- Lower flow aerator options are available
- 8" (203 mm) to 16" (406 mm) centers
- 2.2 gpm (8.3 lpm) maximum flow rate at 60 psi (4.14 bar)



Codes/Standards

ASME A112.18.1/CSA B125.1
 NSF/ANSI/CAN 372
 NSF/ANSI/CAN 61
 DOE - Energy Policy Act 1992
 NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 5-1/4" (133 mm)

Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

Material

- Brass valve bodies
- Brass

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Required Products/Accessories

- K-16010-3 Cross handles for centerset base faucet
- or
- K-16010-4 Lever handles for centerset base faucet
- or
- K-16010-5 Wristblade lever handles for centerset base faucet


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 7-29-2026 20:35 - US-CA

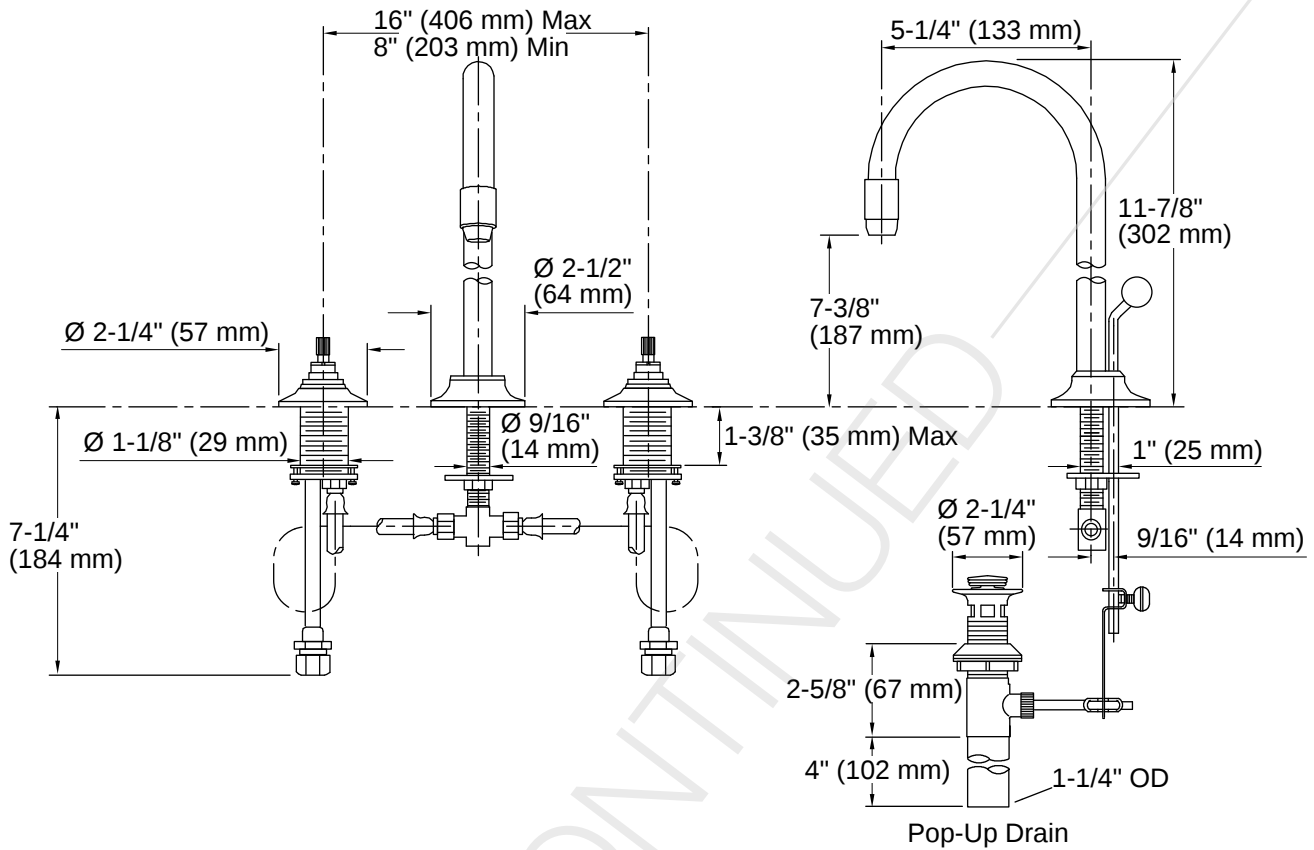

Installation Notes

Install this product according to the installation instructions.

