


1

Lift out the toilet




4

Discharge outlet aligns with discharge pipe

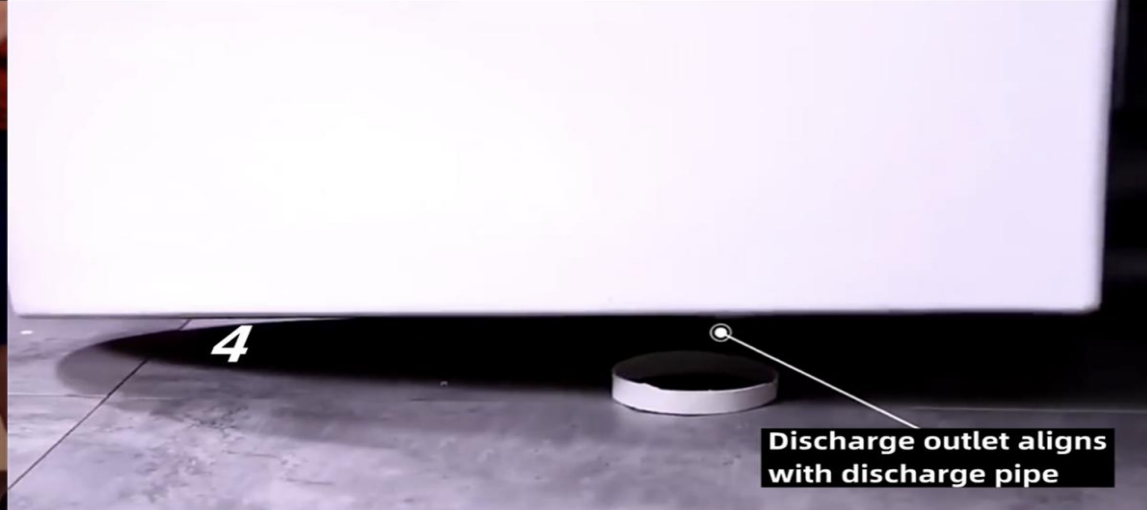

2

(Rough in size)
Distance from the center of
drain outlet to the wall: 12 "

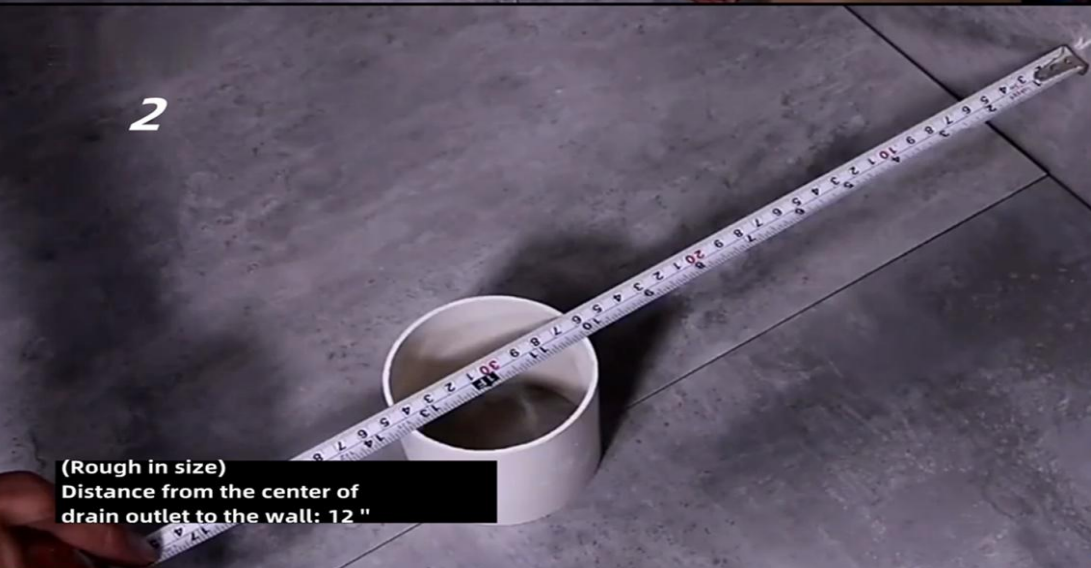

5

Draw a contour



3


Drain outlet is cut to 0.2 " - 0.4"



6

Apply fungiproofing silica gel



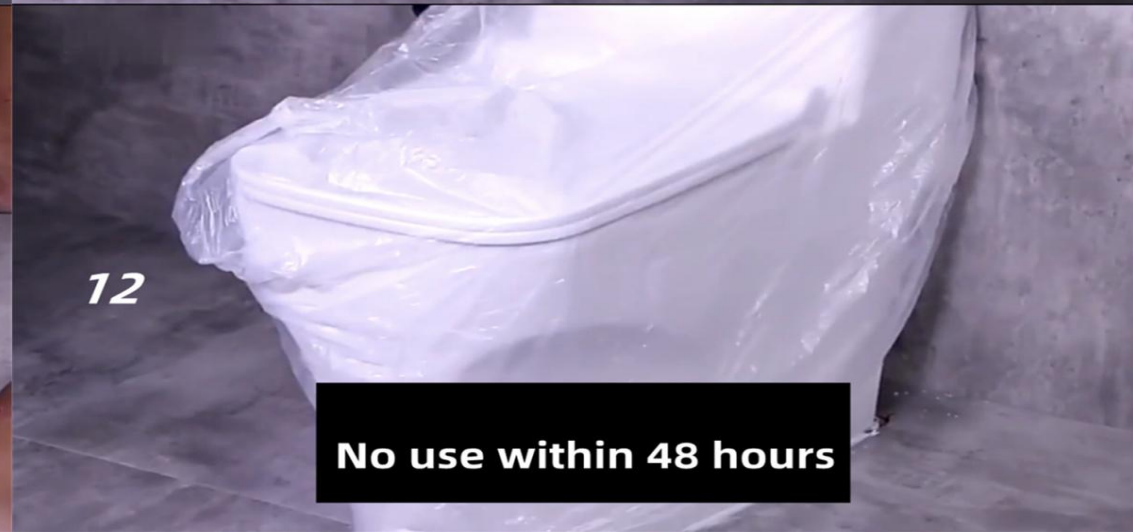

INSTALLATION INSTRUCTION



Insert the screw on the hinge base into the holes on the pan.



Tighten the setscrew but not to the end in order to adjust the seat cover properly.



Aim at the holes and adjust the hinge base to make the seat cover and pan match.



Fix the hinge base on the pan firmly.



Put the cap into the hinge base. Fix the seat cover into the hinge base, Finish.



Press the button and remove the seat cover for cleaning.