

### Features


- Acrylic
- Bask™ heated lumbar support with three temperature settings
- Molded lumbar support and armrests for comfort
- Textured bottom surface
- Drop-in or under-mount installation
- Reversible drain
- 60" (1524 mm) x 42" (1067 mm) x 21" (533 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- CSA B45.5/IAPMO Z124
- ASTM E662
- UL 1795

### 5' DROP-IN BATH WITH BASK™ HEATED SURFACE K-1163-W1

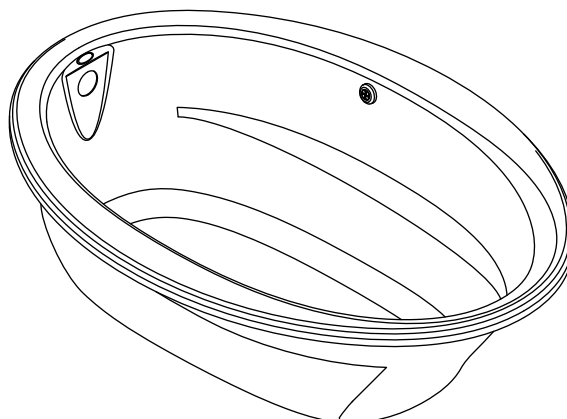

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

| Model                          | Description                              | Colors/Finishes             |                                     |
|--------------------------------|--|-----------------------------|-------------------------------------|
| K-1163-W1                      | 5' Drop-in bath with Bask heated surface | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |
| <b>Recommended Accessories</b> |  |                             |                                     |
| K-11677                        | Swiftflo™ adjustable trip lever drain    | <input type="checkbox"/> CP | <input type="checkbox"/> Other_____ |
| <b>Optional Accessories</b>    |  |                             |                                     |
| K-576                          | Under-mount kit                          |                             | <input type="checkbox"/> NA         |
| K-1491                         | Pillow                                   | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |
| K-1601                         | Footstop                                 | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |

### Product Specification

The bath shall be made of acrylic. Bath shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 21" (533 mm) in height. Bath shall have molded lumbar supports and armrests for comfort. Bath shall have textured bottom surface and reversible drain. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall be for drop-in or under-mount installation. Bath shall be Kohler Model K-1163-W1-\_\_\_\_\_.

# SUNWARD®

## Technical Information

|   |  |                                      |           |    |    |
|---|--|--------------------------------------|-----------|----|----|
| Fixture*:                                       |  |                                      |           |    |    |
| Bathing well:                                   |  |                                      |           |    |    |
| Basin area, bottom                              |  | 43" (1092 mm) x 21-9/16" (548 mm)    |           |    |    |
| Basin area, top                                 |  | 53-1/2" (1359 mm) x 32-1/8" (816 mm) |           |    |    |
| Weight  |  | 75 lbs (34 kg)                       |           |    |    |
| To overflow:                                    |  |                                      |           |    |    |
| Water depth                                     |  | 15" (381 mm)                         |           |    |    |
| Capacity  |  | 57 gal (215.9 L)                     |           |    |    |
| * Approximate measurements for comparison only. |  |                                      |           |    |    |
|   |  |                                      |           |    |    |
| Included components:                            |  |                                      |           |    |    |
| Cut-out template                                |  |                                      | 1042556-7 |    |    |
|   |  |                                      |           |    |    |
| Heater:   |  | W                                    | V         | HZ | A  |
|   |  | 65                                   | 120       | 60 | .5 |

## Installation Notes


Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 33 lbs/square foot (161 kg/square meter) loading.

No change in measurements if connected with drain illustrated.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.

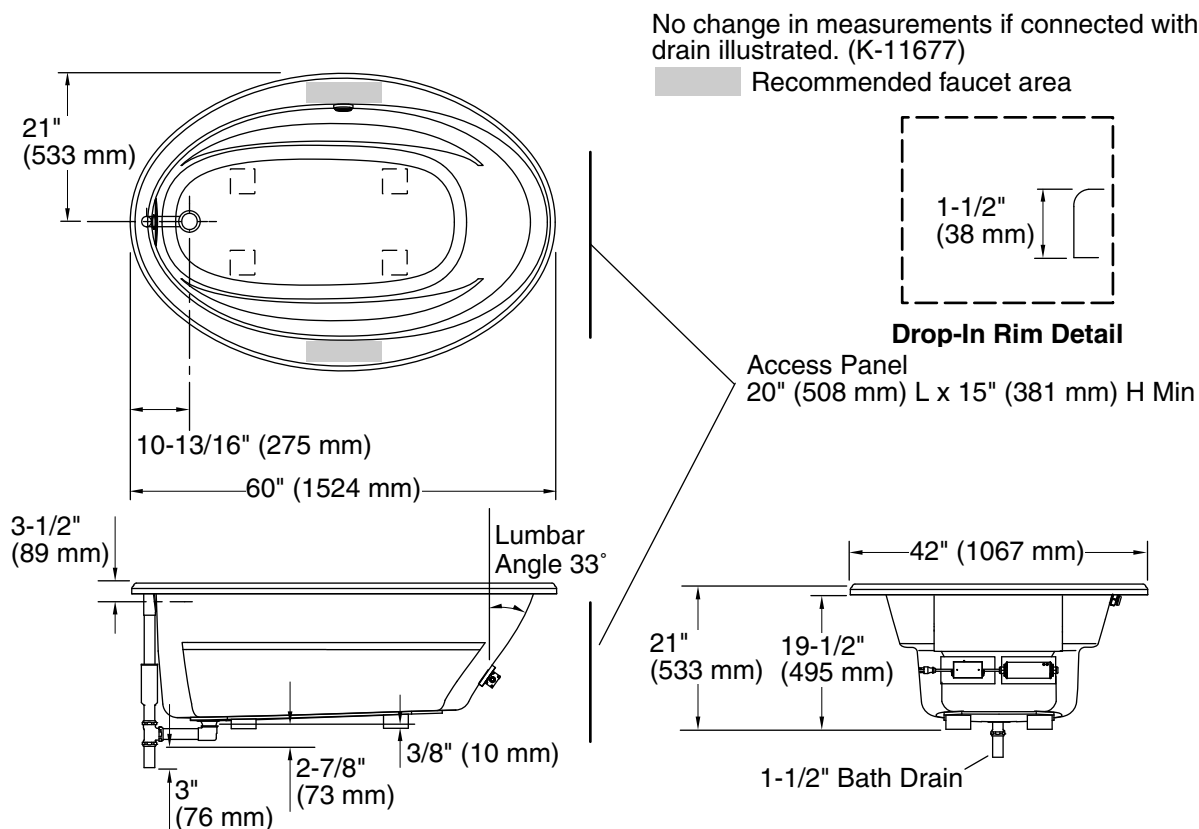

## Product Diagram

SUNWARD® 5' DROP-IN BATH WITH BASK™ HEATED SURFACE

Page 2 of 2  
1201650-4-B

THE BOLD LOOK  
OF **KOHLER®**