

Stainless Steel Playtop Home PARTS LIST

CUSTOMER SUPPORT

For assistance or replacement parts,
please contact us.

HARDWARE INCLUDED:



Phillips-head screws
18 pcs (installed in place
on cage panels) *



Hex screws
4 pcs (installed in place
on playtop supports)



Knobs
4 pcs (installed in place
on cage & playtop bar)



C
Casters
4 pcs

* (plus 2 bagged extras)

TOOLS INCLUDED:

Allen wrench




TOOLS NOT INCLUDED:

Phillips-head
screwdriver



KEY:

B = Back panel
LS = Left Side panel
F = Front panel
RS = Right Side panel
R = Roof grille
C = Casters
PC = Playtop Components
CC = Cage Components

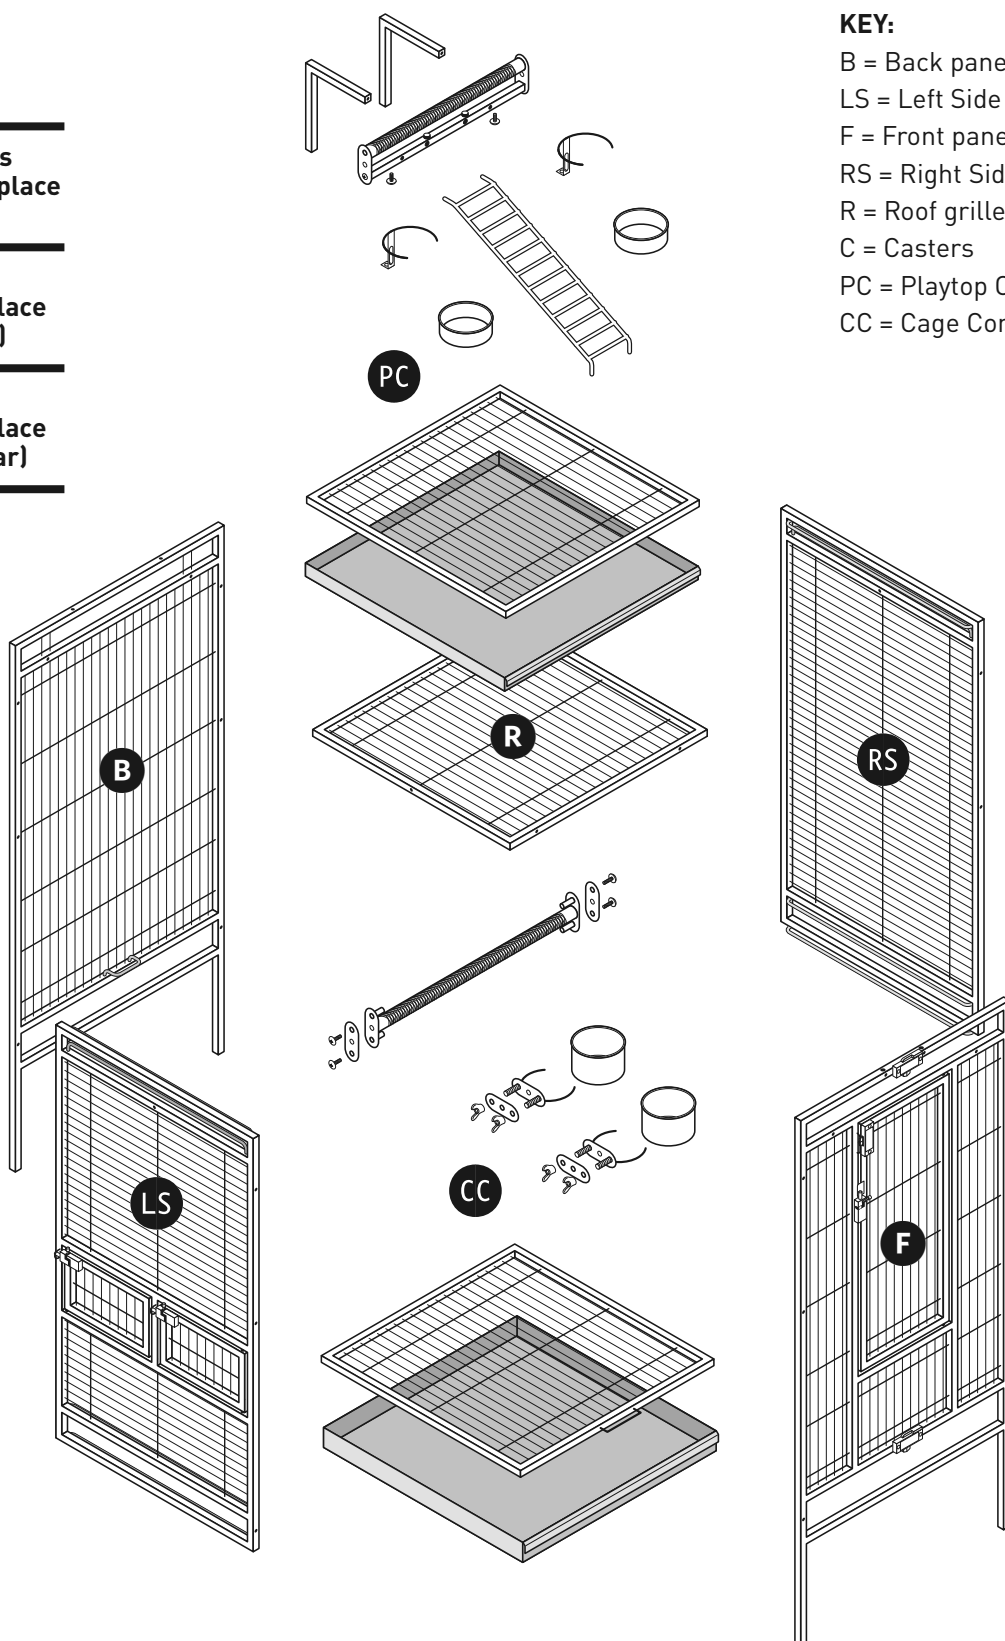

Stainless Steel Playtop Home

CUSTOMER SUPPORT

For assistance or replacement parts,
please contact us.

TOOLS NEEDED : Phillips head screwdriver • For best results, follow Assembly Steps in order presented.

KEY:

B = Back panel

R = Roof grille

F = Front panel

C = Casters



LS = Left side
panel

CC = Cage
Components


RS = Right side
panel

PC = Playtop
Components


1 PIECES

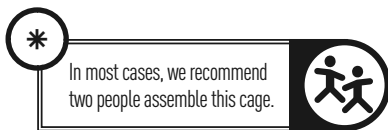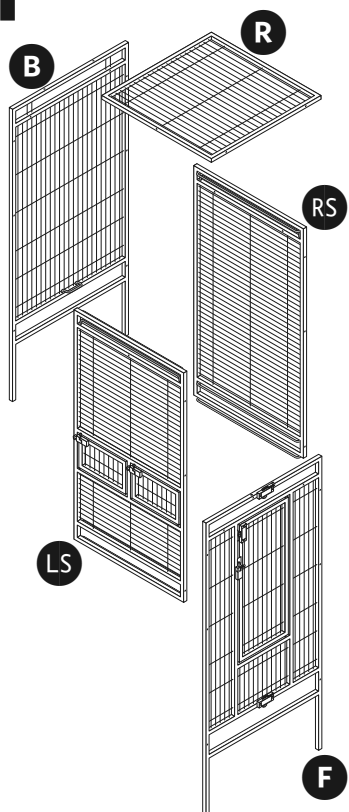

In most cases, we recommend
two people assemble this cage.


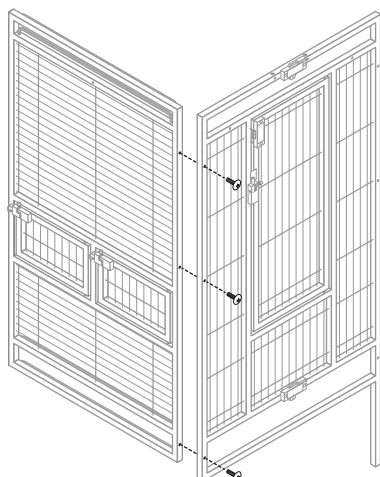


Back the Phillips-head screws out,
align the side panel with the front
panel, and re-tighten the screws to
attach.

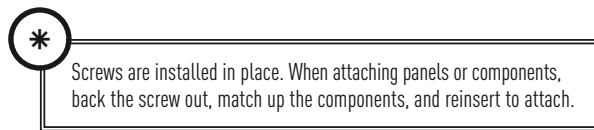


Screws are installed in place. When attaching panels or components,
back the screw out, match up the components, and reinsert to attach.

*Note: Small loop on
the back panel should
face the interior. This
loop helps hold the
bottom grille in place.*

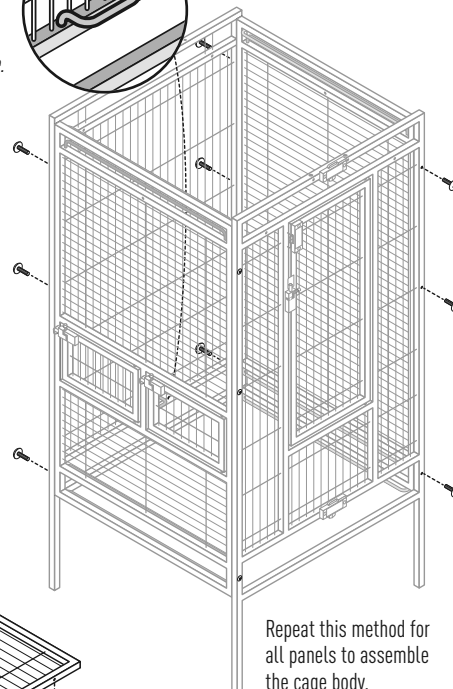


Repeat this method for
all panels to assemble
the cage body.

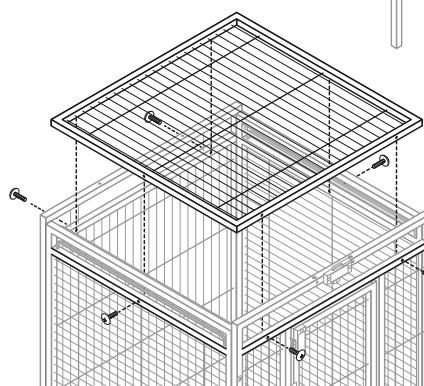


Set the cage roof grille in
place and attach with the
Phillips-head screws.

2 PIECES




While the lockable rolling
casters can be added at
any point in the assembly,
we recommend installing
them at this time.

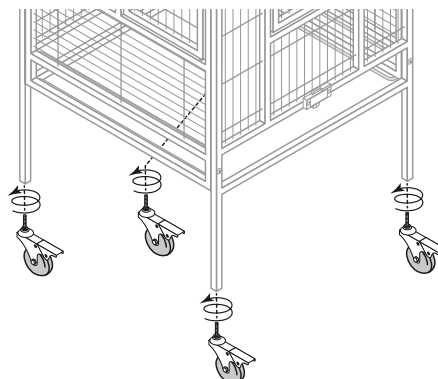


Screw the threaded caster
post into the frame leg at
each corner. If preferred,
tighten each caster with a
slim wrench.


3 PIECES

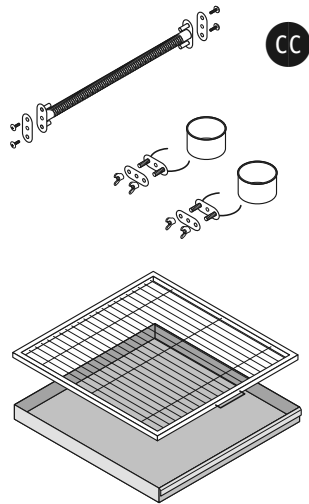

Perch:
Hold the perch in place in the cage interior. Install a Phillips-head screw through the bracket, through the cage wire, into the perch bracket and tighten with a Phillips screwdriver for all four screws.


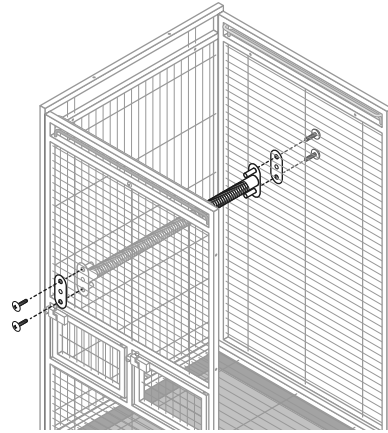


Cups/cup holders:
Open the cup door.
Insert the screw posts on the cup holder on the cup holder through the door mesh, add the bracket on the outside, and tighten to the doors with the wing nuts.
Place the deep cups into the holders.

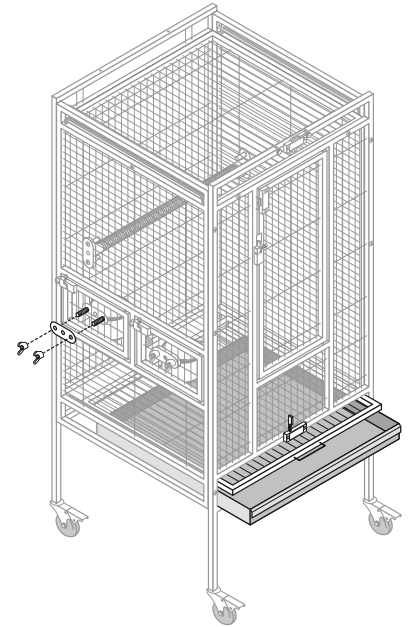



Grille and tray:
Open the grille lock. Slide the **grille (with handle)** into the top channel and the **deep tray** into the bottom channel.

4 PIECES

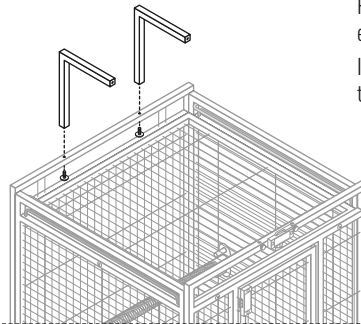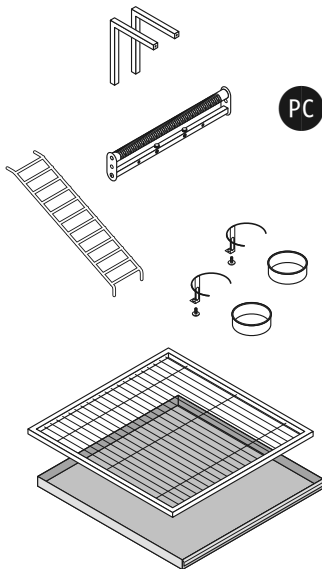


Remove the hex screws from the ends of the perch bar supports.
Install the perch bar supports on the back panel of the cage.


Back the Phillips-head screws out on the underside of the perch bar and attach the cup holders.

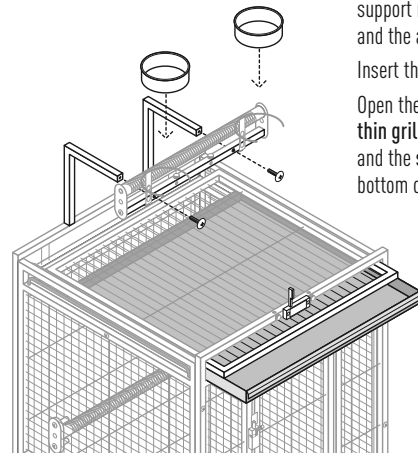

Attach the **perch bar** to the support rails using the hex screws and the allen wrench.
Insert the shallow cups.
Open the grille lock. Slide the **thin grille** into the top channel and the **shallow tray** into the bottom channel.

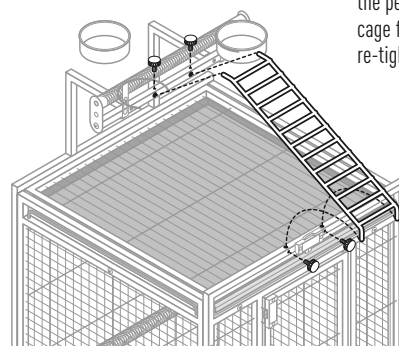

Loosen the knob screws on the perch bar rail and along the cage front. Insert the ladder and re-tighten the knob screws.

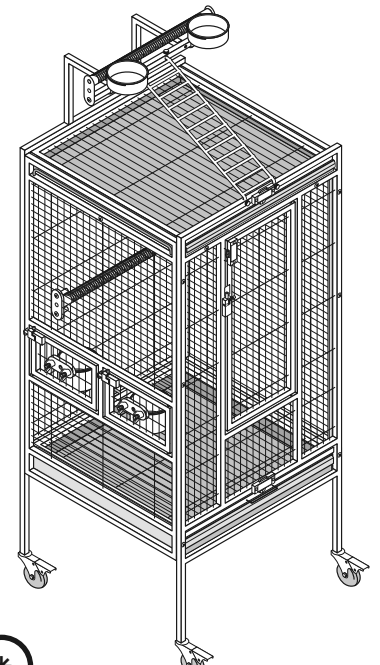

***** When fully assembled, check and tighten ALL screws and wing nuts over the entire cage to ensure a safe and stable home.

Assembly completed. ■