

***WARNING: ASSEMBLE UNIT, DRY FIT, AND FIELD VERIFY DIMENSION BEFORE SETTING OPPOSITE POSTS IN CONCRETE.


A PROTECTIVE SURFACE IS REQUIRED FOR THIS PLAYSYSTEM THAT MEETS THE REQUIREMENTS OF ASTM F1292.

* SAFETY ZONE EXTENDS FT. (')-IN. (") BEYOND CENTER OF POST FOOTING.

ACTUAL SIZE: 2' x 2'

REQUIRED AREA: 14' x 14'

TITLE			
PLAN VIEW/FOOTING			
SCALE:	1/4"=1'	Kidstuff Playsystems	
DATE:	12/18/12	REV. NO.:	01
		REV. DATE:	02/11/13
MODEL:	86203	APPROV.:	VG/KR
		DWG.:	SPINSANITY

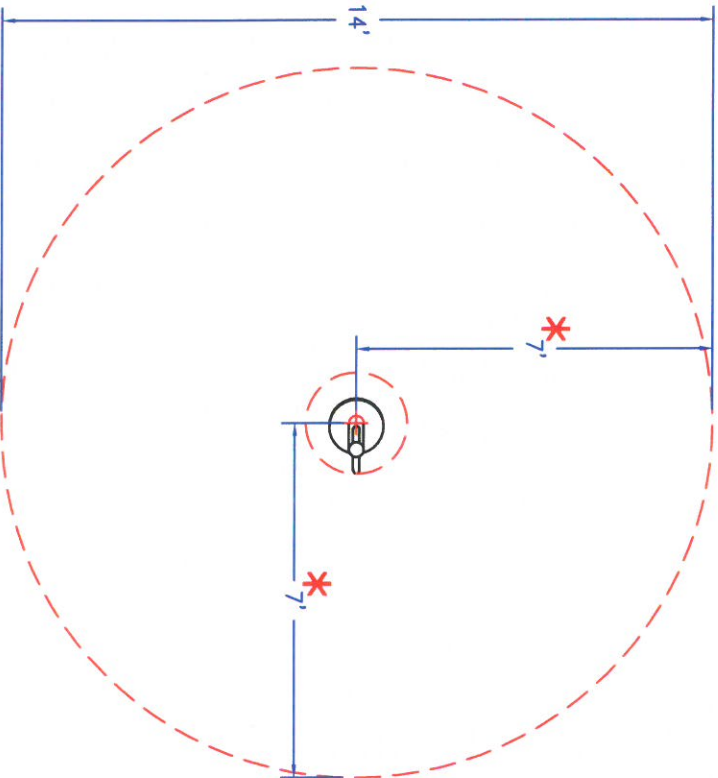

FOOTING DEPTH IS MEASURED FROM TOP OF SAFETY SURFACE. DEPTH IS 30" UNLESS NOTED OTHERWISE (SEE FOOTING DET.)

THE CONSUMER PRODUCT SAFETY COMMISSION MAY RECOMMEND LONGER USE ZONES AT SLIDE EXITS THAN THOSE SHOWN HERE. SEE PAGE 6 OF THE CPSC "HANDBOOK FOR PUBLIC PLAYGROUND SAFETY", PUB. #325, OR CALL KIDSTUFF PLAYSYSTEMS.