## **KOHLER**, Faucets

## Finial® Traditional

Rite-Temp® Shower Valve Trim
K-TS313-4M

### **Features**

- Includes face plate with handle, shower arm with flange and showerhead.
- Single lever handle controls both on/off activation and temperature setting.
- Coordinates with Finial Traditional faucets and accessories to complete your bathroom.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean™ sprayface for easy cleaning.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3 degrees Fahrenheit during water pressure fluctuations

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing

### Installation

Trim set requires valve to complete installation.

## **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

10

K-304/K-P304 Series Rite-Temp® Valves

K-304/K-P304 Series Rite-Temp® Valves

or

K-304/K-P304 Series Rite-Temp® Valves

or K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves

OI

K-304/K-P304 Series Rite-Temp® Valves





### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze





## Finial® Traditional

Rite-Temp® Shower Valve Trim K-TS313-4M

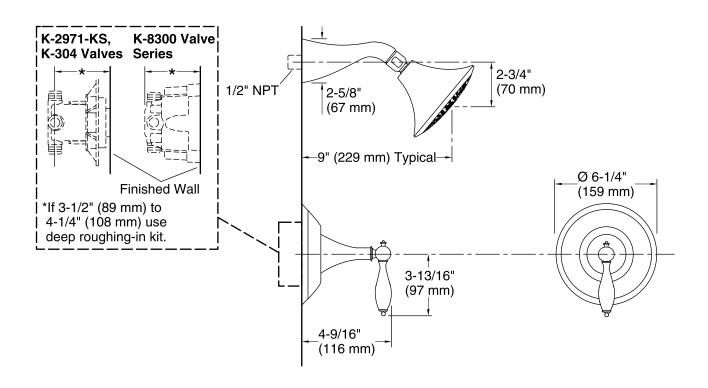

### **Technical Information**

All product dimensions are nominal.

## **Showerhead/Body Spray:**

Rated maximum flow: 2.5 gal/min (9.5 l/min)
Pressure: 80 psi (5.5 bar)

### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

