


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

- 1. Before installing,consult local electrical codes for wiring and grounding requirements.
- 2. Read and save these instructions.
- 3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

WALL LAMP

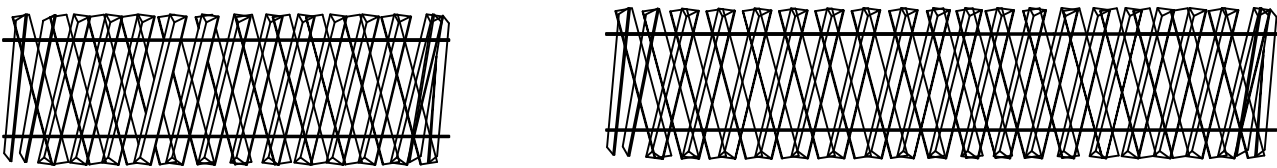

TOOLS REQUIRED

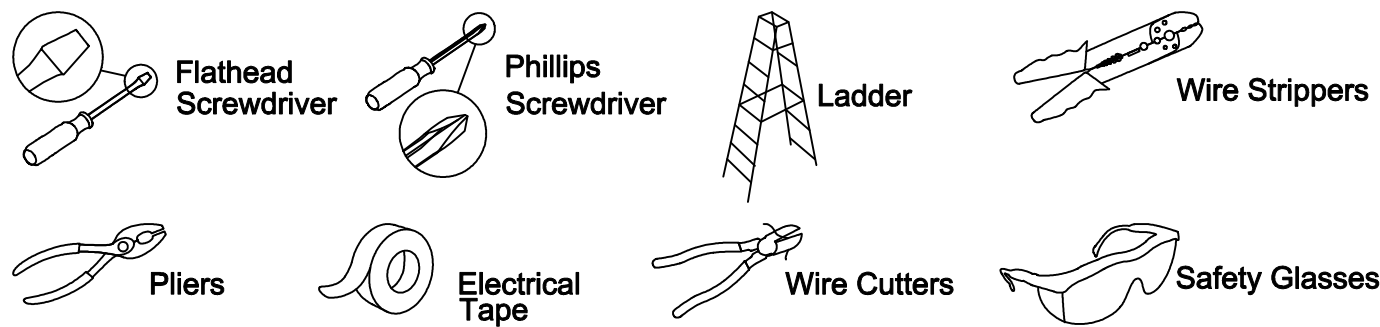

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION
A	Mounting plate
B	Green ground screw
C	Outlet box screw
D	Wire nut
E	Mounting screw

PIECE	DESCRIPTION
F	Fixture body
G	Anchor
H	Wood screw
I	Crystal

INSTALLATION

1. Determine the position for the mounting plate (A) and mark the four location holes.Drill a hole at each marked position, and insert an anchor (G) into each hole.Attach the mounting plate(A) to the junction box with outlet box screw (C),Attach the mounting plate(A) to the anchor(G) with wood screw(H).
2. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (black) and white to (white).
- 3.Attach the fixture body(F) to the mounting plate(A) with mounting screw(E).
- 4.Install the 60W MAX B10 Bulbs (not included) into socket.
- 5.Insert the crystal (I) into the lamp body (F) at the angle indicated by the dotted line.

