

## 4" Round Deep Regressed LED 15W Open Plenum



**Type IC, Wet, Air-Tight & Open Plenum**

### DESCRIPTION


4" Round Deep Regressed LED - Elegant Design Without Glare  
Commercial Grade Quality Built To Last

### FEATURES & BENEFITS

- High Lumen Output & CRI 90+
- Type IC, Air-Tight & Wet - No Housing Required
- 3 1/2" Deep - Install Where Ceiling Space Is Limited
- Armored Cable & Metal Connectors - Open Plenum Rated
- Driver Inside Connection Box with Romex Quick Connectors and Knock Outs - Fast Installation & No Junction Box Needed

### DIMENSIONS ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

Ceiling Clearance Required: 3"

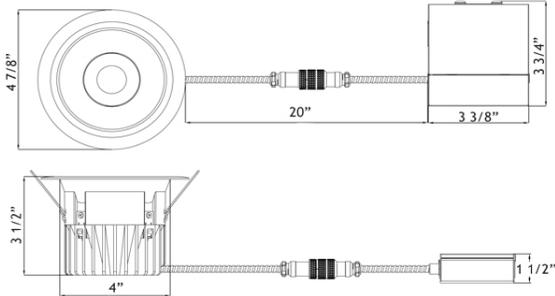

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD1535TR

### ORDERING GUIDE: Example **LD4R-30K-4R-WR-WT**

	CCT	Reflector-Trim
<b>LD4R -</b>	<b>- xxK</b>	<b>- 4R-xx-xx</b>
2700K	<b>27K</b>	<b>WR-WT</b>
3000K	<b>30K</b>	<b>SR-WT</b>
4000K	<b>40K</b>	<b>BR-BT</b>
Dim to Warm 3000K to 2000K	<b>32K</b>	<b>SR-BT</b>

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### SPECIFICATION

Applications	Recessed Ceiling Mount			
Energy Used	15 W			
Color Temperature (K)	2700	3000	4000	DTW 3000-2000
Light Output (lm)	1100	1200	1300	900
Halogen Equivalent	110 W			
Beam Angle	25°			
CRI	90 +			
Default Driver Input	120V AC	Triac Dimmable		
Optional Driver Input	120V-347V AC	0-10V Dimmable		
Power Factor	0.98			
Approved Location	Insulated Ceilings, Open Plenum, Wet			
IP Rating	IP 54			
Air Tight	Yes			
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)			
Projected Life	70% Light Output at 50,000 Hours			
Certification	cULus, Energy Star (except DTW), T24			
Warranty	10 Year on Residential 5 Year on Commercial Applications			

### Stock Trims



White Reflector    Silver Reflector    Black Reflector    Silver Reflector  
White Trim    White Trim    Black Trim    Black Trim  
**4R-WR-WT**    **4R-SR-WT**    **4R-BR-BT**    **4R-SR-BT**

Other Reflector & Trim Colors Available By Custom Order

### ACCESSORIES

Sold Separately



Armored Low Voltage Extension  
10ft cat # **MEC10**

Flat Rough-In Plates - cat # **RIP4**

Flanged Rough-In Plates - cat # **FRP4**

Goof Ring OD 5 3/4"

White cat # **GR4**    Black cat # **GR4-BK**



**Type IC**  
**Air - Tight**  
**Open Plenum**