













# ASSEMBLY INSTRUCTIONS POWER MOTION SECTIONAL


## PARTS LIST

NOTE: Do not use power tools for assembly. Power tools increase the risk of over tightening which lead to splitting or cracking the wood. It is recommended to have two people during assembling.


NO.	DRAWING	QTY	DESCRIPTION	
A		1PC	LSF SEAT	<b>BOX 1</b> Left Arm Facing Love & Console
B		1PC	LSF BACK REST	
C		2PCS	CONSOLE BACK REST	BOX 1 - Back for Console (1PC) BOX 2 - Back for Console (1PC)
D		2PCS	MSF BACK REST	BOX 1 - Middle Back (1PC) BOX 2 - Middle Back (1PC)
E		1PC	LSF EAR	<b>BOX 1</b> Left Arm Facing Love & Console
F		1PC	RSF EAR	<b>BOX 3</b> Right Arm Facing Love & Console
G		1PC	RSF BACK REST	
H		1PC	RSF SEAT	
I		1PC	WEDGE SEAT	<b>BOX 2</b> Corner Wedge
J		1PC	WEDGE LSF BACK	
K		1PC	WEDGE RSF BACK	
L		4PCS	BOLT	

Please follow the drawings below to assemble the item

Step 1: Console back rest is stored in non-woven bag and put in the bottom of console. Please take out for assembly.

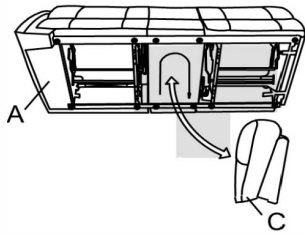


Step 2: Align the female brackets at the back onto the male brackets at the seat, insert back rest to the seat then push to the end and make sure it is fixed in position securely.

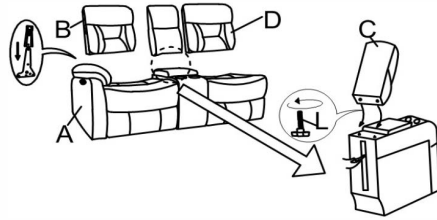


Please unzip the back of the console base and insert the bolts upward through the pre-drilled holes and align it through the holes on the bottom of the console back. Tighten each bolt by turning it counter-clockwise until the console back is secured in place.

Step 3: Please insert the LSF ear to the back rest and make sure it is secured in position.

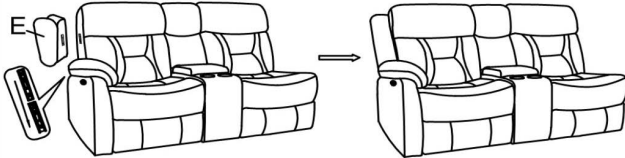


Step 4: Console back rest is stored in non-woven bag and put in the bottom of console. Please take out for assembly.

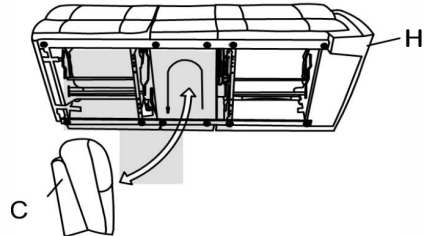


Step 5: Align the female brackets at the back onto the male brackets at the seat, insert back rest to the seat then push to the end and make sure it is fixed in position securely.


Please unzip the back of the console base and insert the bolts upward through the pre-drilled holes and align it through the holes on the bottom of the console back. Tighten each bolt by turning it counter-clockwise until the console back is secured in place.

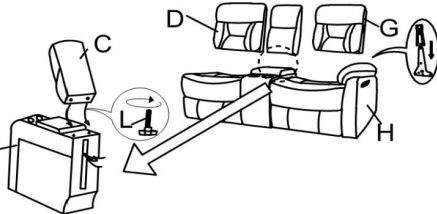


Step 6: Please insert the RSF ear to the back rest and make sure it is secured in position.

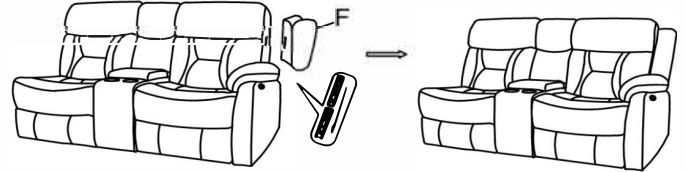

Step 7: Align the female brackets at the back onto the male brackets at the seat, insert back rest to the seat then push to the end and make sure it is fixed in position securely.


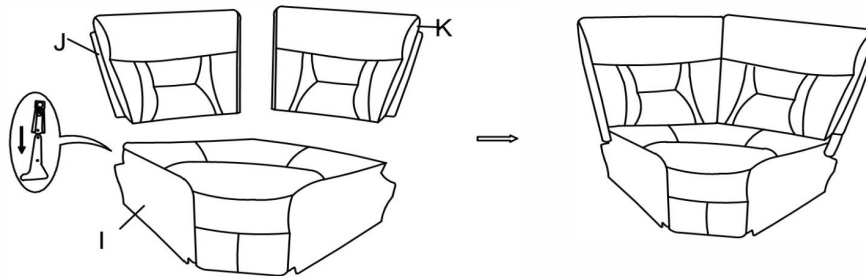



Step 8:

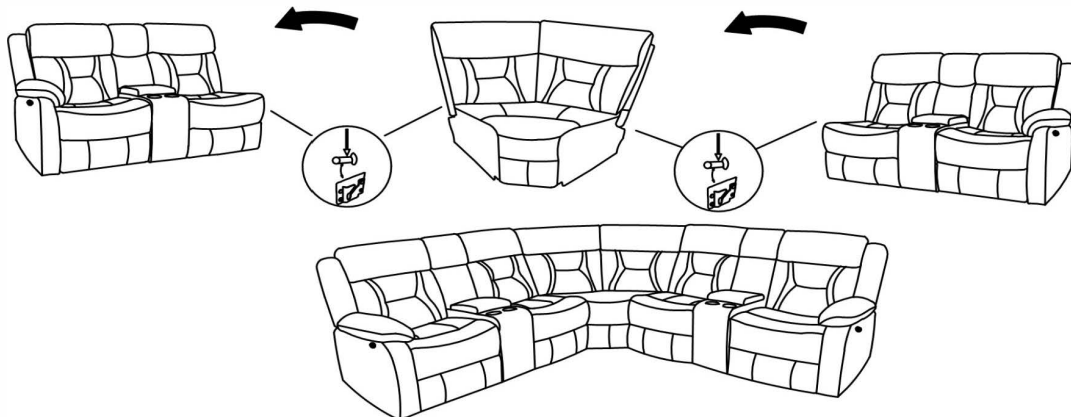

- Avoid exposing furniture directly with sunlight or heating and air conditioning outlets. Exposure to sunlight or heating and air conditioning outlets will fade/damage leather gel.
- Wipe gently with a damp soft cloth to remove dust, dirt and any grime build up.
- Wipe the leather gel with professional cleanser.

# Power Assembly Instruction

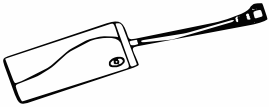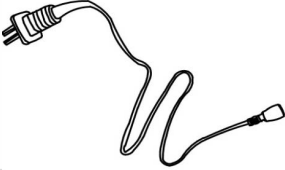Item	Picture	Description	Quantity
A		Power Supply	2 PCS
B		Cable	2 PCS

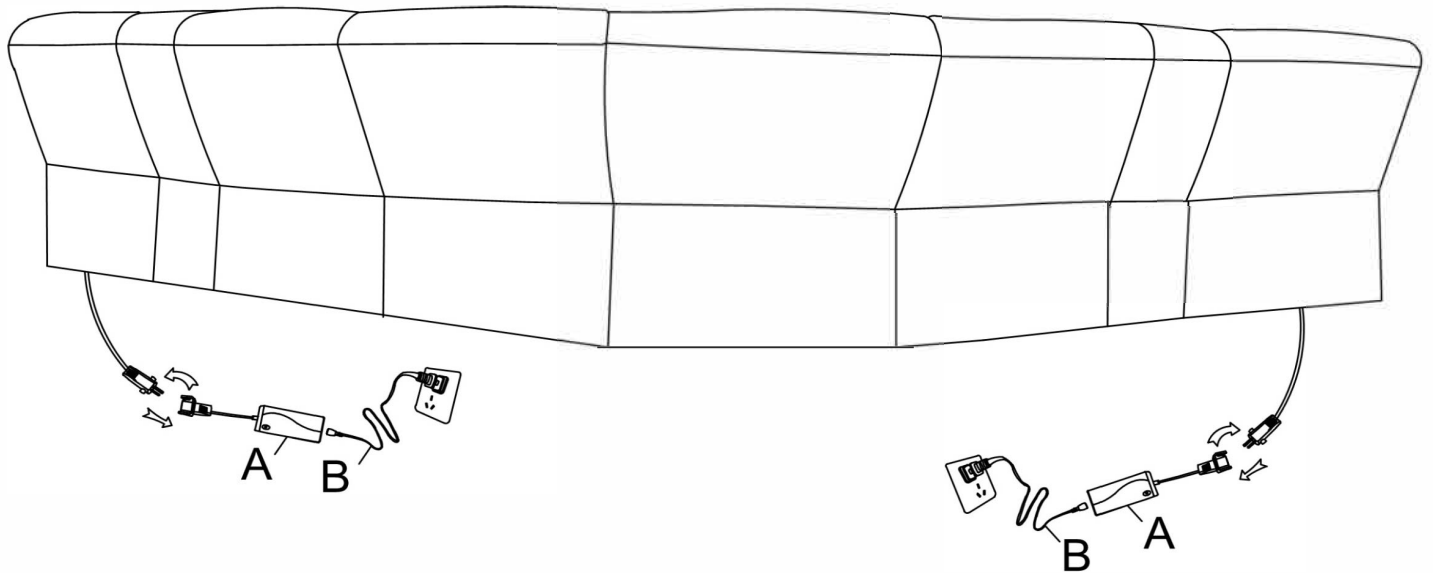

All images shown are for illustration purpose only.  
Actual product may vary due to product enhancement.