


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

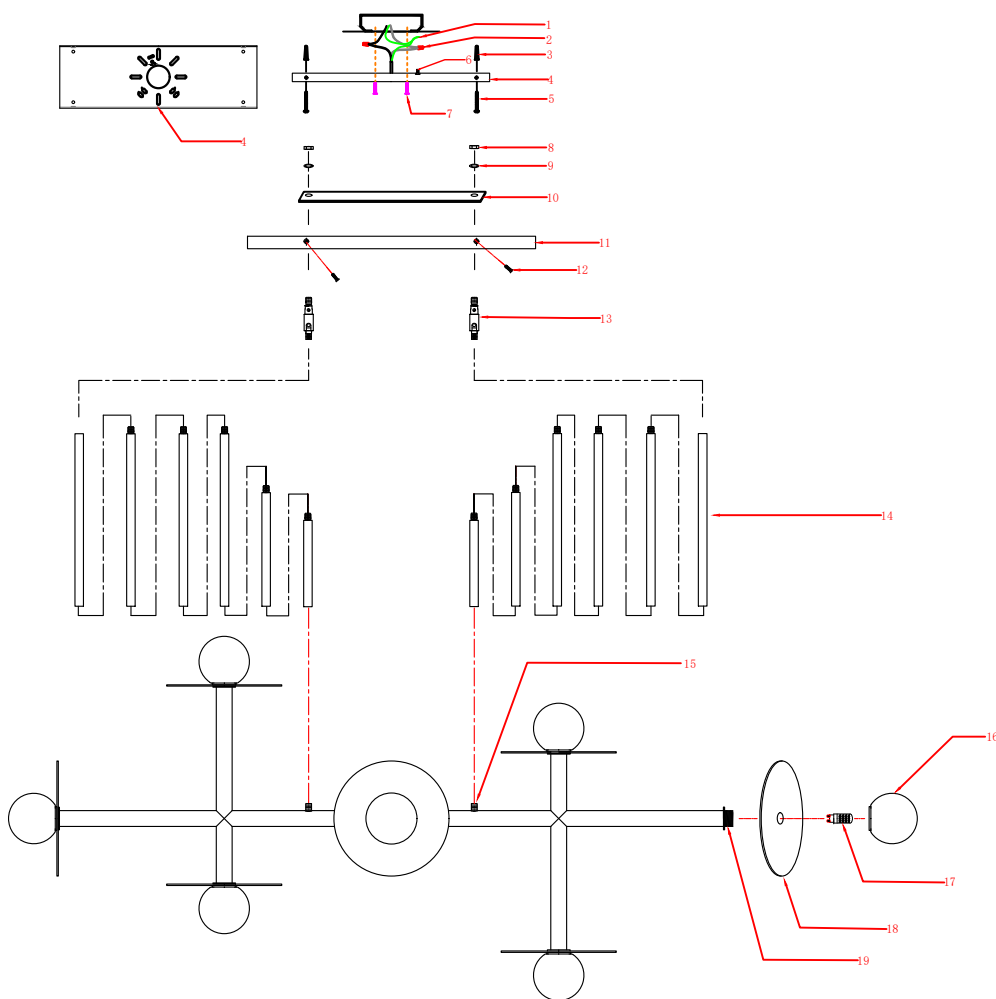

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1. Remove the mounting bracket (4) from the ceiling canopy (11). Temporarily secure the bracket to the junction box using the screws (7).
2. Mark four drilling points on the ceiling through the holes for the self-tapping screws on the mounting bracket (4). Remove the bracket.
3. Drill appropriately sized holes at the marked locations. Install the four plastic anchors (3) into the holes.
4. Permanently secure the mounting bracket (4) to the junction box using the screws (7). Then, drive the four self-tapping screws (5) into the plastic anchors (3).
5. Connect suspension rods (14) to achieve the desired hanging height. Feed the fixture wires through them, and then secure the assembly to the fixture's connection point (15).
6. Feed the wires through the swivel joint (13) and secure the swivel to the suspension rods (14).
7. Feed the wires through the canopy (11) and the reinforcement plate (10). Secure them to the swivel (13) using the lock washer (9) and nut (8).
8. Wiring Connections
 - Use wire connectors (2) to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire. Secure the fixture ground wire and house ground wire to the mounting bracket (4) using the green grounding screw (6).
 - Ensure no exposed conductors remain outside wire connectors or outside the junction box.
9. Neatly tuck all wires into the junction box. Secure the ceiling canopy (11) to the mounting bracket (4) using the four provided flat-head screws (12).
10. Install the bulb (17) into the socket (bulb not included). Do not exceed the maximum wattage indicated on the warning label near the socket.
11. Place the flat washer (18) onto the lamp arm (19). Screw the glass shade (16) onto the lamp arm clockwise until hand-tight. Do not over-tighten to prevent glass breakage.
12. Restore power and test the fixture for proper operation.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.

1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.