
OSA48CCM

BATHROOM VANITY SET

SKU: OSA48CCM-CWT
OSA48CCM-CNB
OSA48CCM-COAK

Colors/Finishes: White, Navy Blue, OAK
Nominal Dimension:48W*22D*35H inches

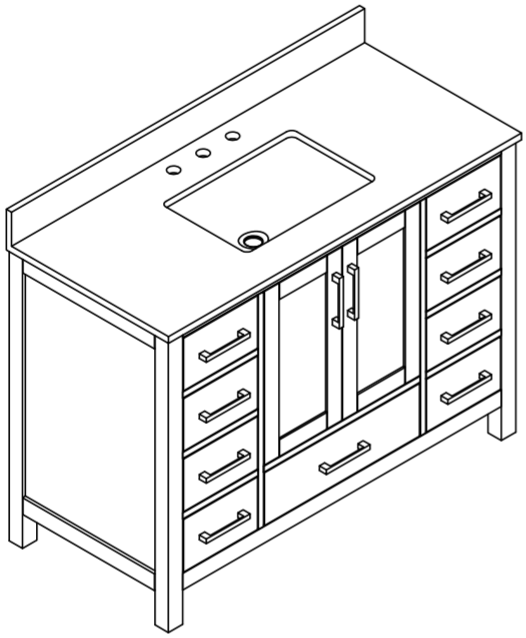

VANITY FEATURES:

1.Materials: Solid popular wood frame, high quality veneer plywood.

2.Doors: 2 soft-close doors,Soft-close hinges system.

3.Drawers: 9 soft-close dovetail drawers,concealed soft-close sliders.

4.Hardware: Alloy metal, Brushed Gold(available in other colors).

5.Installation Type: Freestanding.

6.Built-in Adjusters: Adjustable height levelers.

7.Vanity Top: Carrara Cultured Marble

8.Assemble required: No


9.Vanity top Included: Yes

10.Mirror Included: Optional

11.Medicine Cabinet Included: Optional

Contents

48”Vanity……PAGE2
48”Vanity Top……PAGE3
Vanity Installation……PAGE4,5

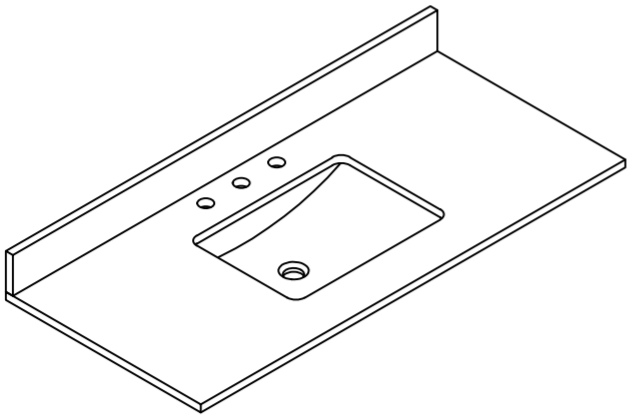

VANITY TOP FEATURES:

1.Material: Durable and water-resistant cultured marble.

2.Top Color: Carrera white

3.Sink: 1*20”undermount rectangle sink.

4.Faucet Holes: Top pre-drilled for 8”widespread faucet holes.

5.Sink Certified: CUPC certified

6.Backsplash: 4”backsplash included

7.Faucet Included: No

8.Nominal Dimension(W*D*H): 48W*22D*11/16H inches

All dimensions and specifications are nominal and may vary.Use actual products for accuracy in critical situations.

OSA48CCM


BATHROOM VANITY SET

SKU: OSA48CCM-CWT
OSA48CCM-CNB
OSA48CCM-COAK


COMPONENTS:

Vanity	OSA48CCM-CWT	OSA48CCM-CNB	OSA48CCM-COAK
Vanity Top	CM48CW18OSA	CM48CW18OSA	CM48CW18OSA
Side Spash	SIDE SPLASH-CCM	SIDE SPLASH-CCM	SIDE SPLASH-CCM
Handle(optional)	HANDLE-14128BLACK	HANDLE-14128BN	


Front

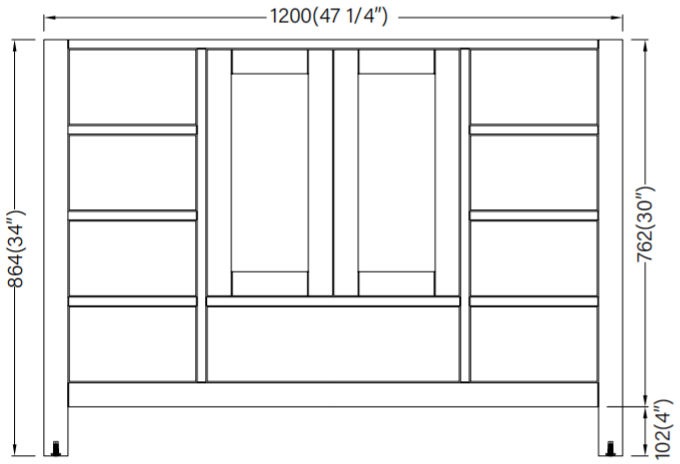


Back

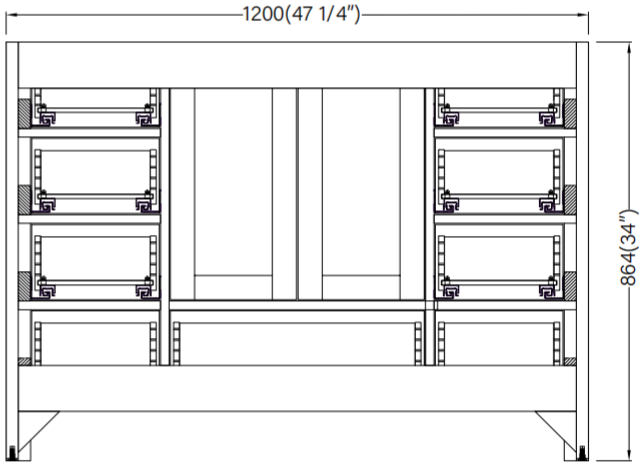

Top

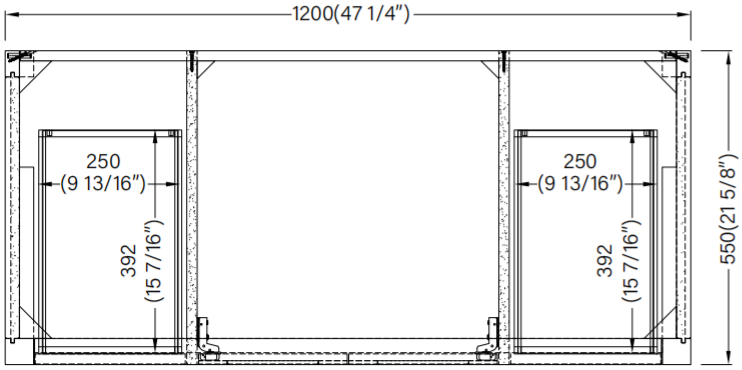

Side

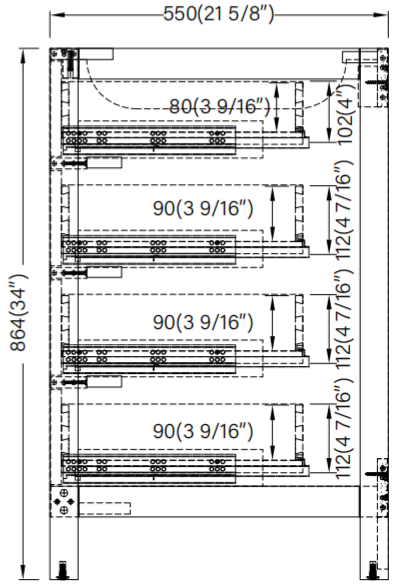


All dimensions and specifications are nominal and may vary.Use actual products for accuracy in critical situations.


OSA48CCM

VANITY TOP

With rectangular undermount sink

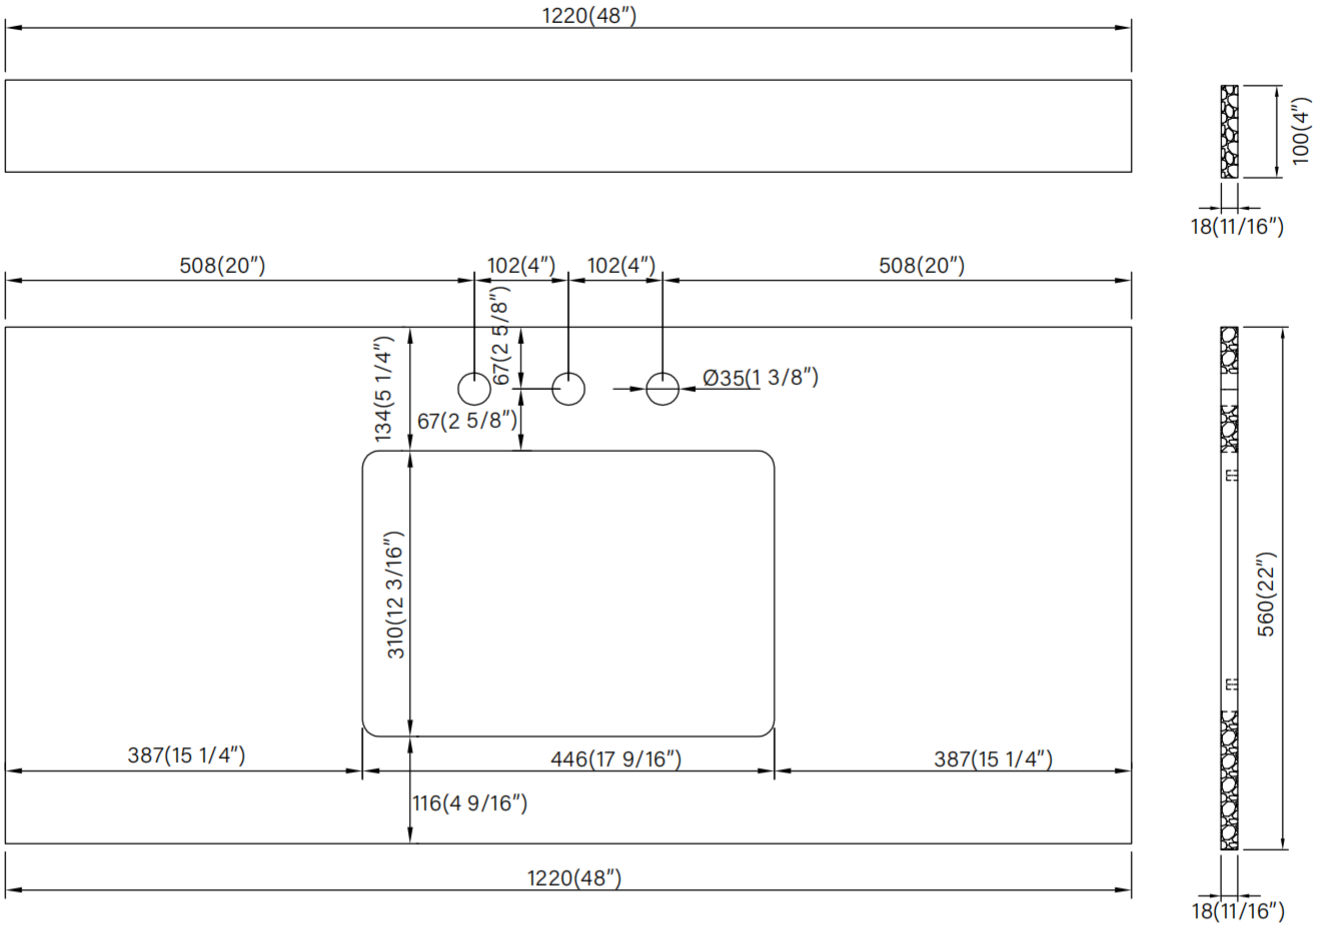


Undermount Sink

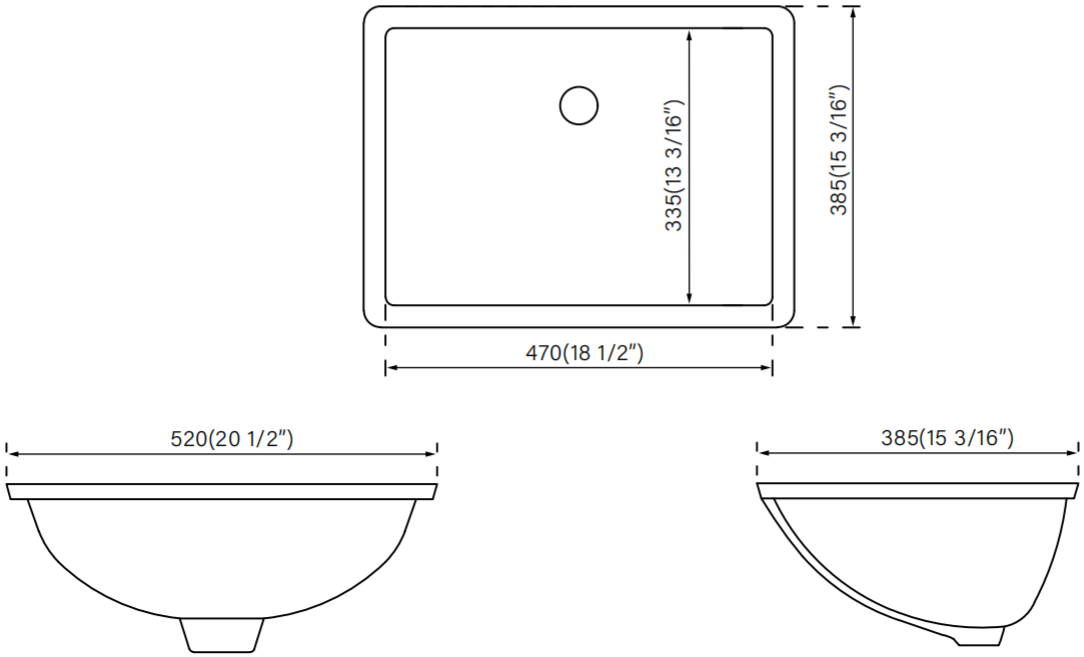

All dimensions and specifications are nominal and may vary.Use actual products for accuracy in critical situations.

Vanity Installation

SUGGESTED TOOLS AND MATERIALS:


Sealant


Measuring tape



Safety glasses


Rag


Level


INSTALLATION INSTRUCTLONS

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing .We accept no liability for any damage to the floor,plumbing,vanity cabinet,sink, counter top,or personal injury during installation.

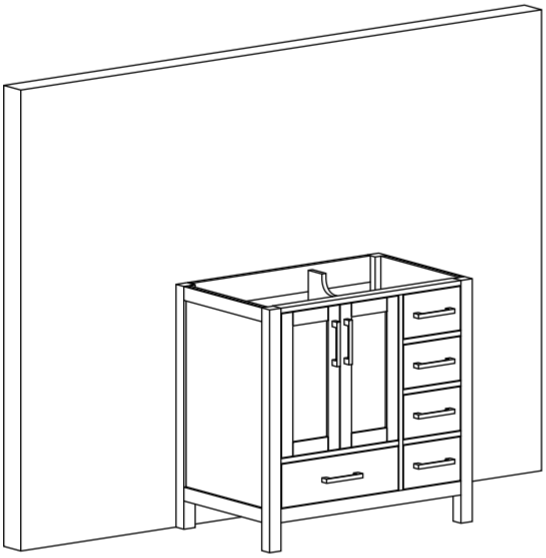


Remove vanity from box and examine vanity for any defects or damage.Carefully place vanity against wall.

2

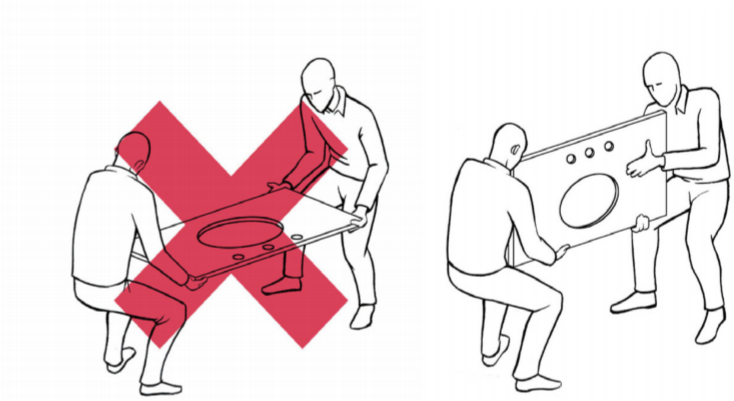


Always use a two man crew,a single person crew is much more likely to break or chip the stone top.

3

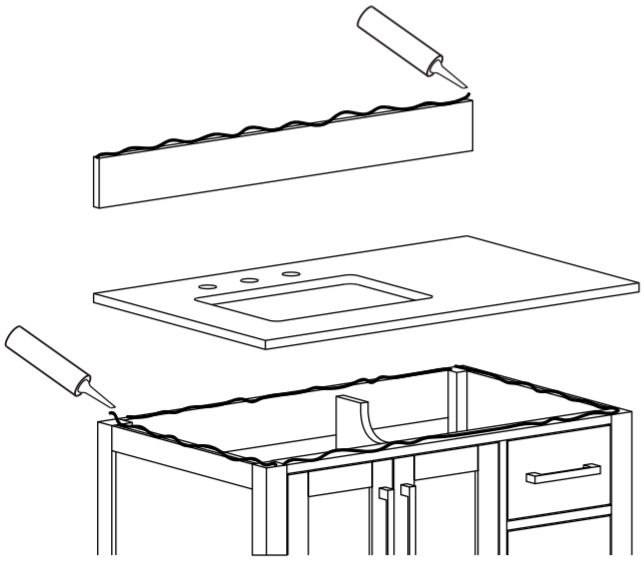

Apply bead of quality sealant evenly along the bottom of backsplash and the top of the vanity.

4

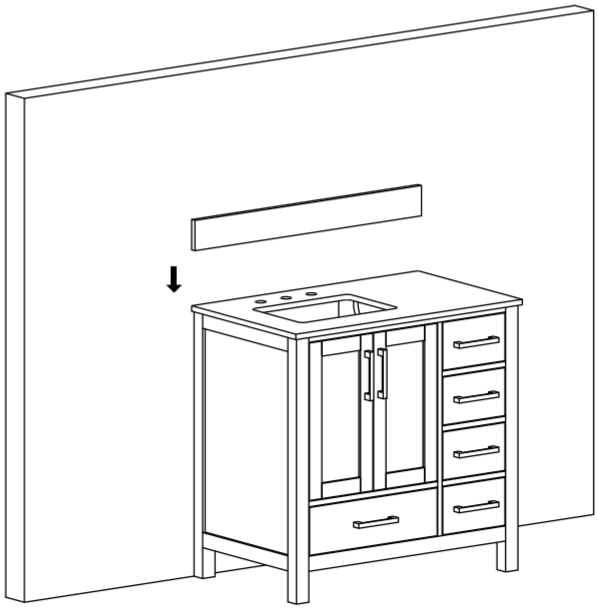


Finally,place the bottom side of back splash with sealant onto the counter top and check alignment of back splash.

Note:sink style,shape,countertop,vanity may vary from the picture above. Instructional purpose only


Vanity Installation

5

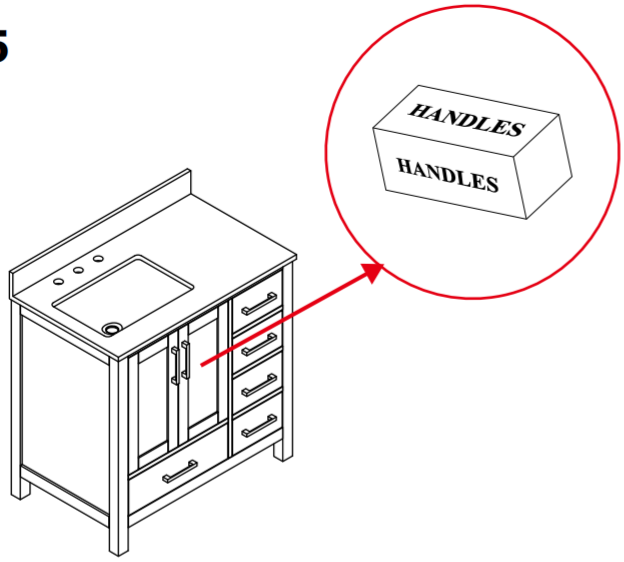


Different handle colors are available for purchase separately and may be packed inside the cabinet or shipped separately.

6

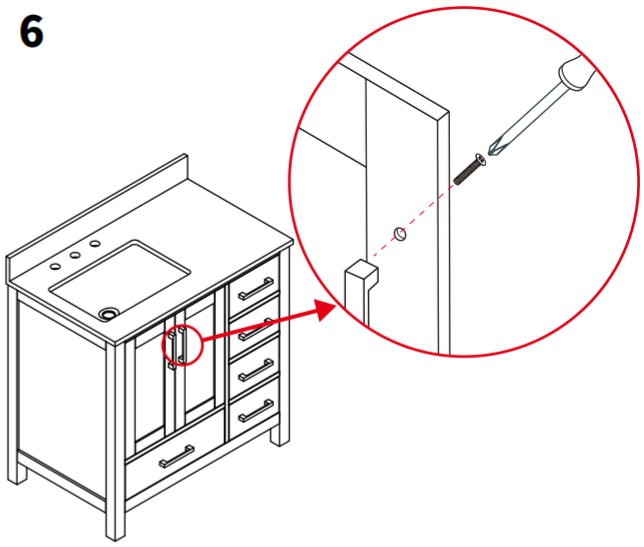


Unpack the handles and install them on the vanity. Do not over tighten when attaching.

7

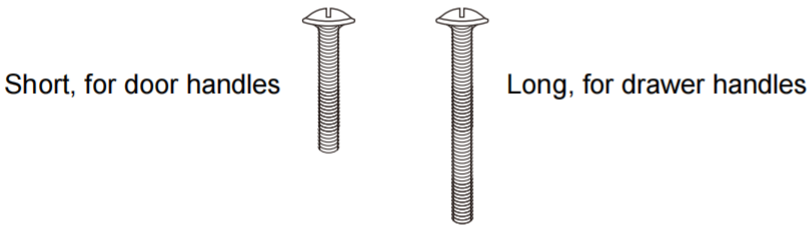

Short screws are for the door handles and long screws are for the drawer handles.

HOW TO ADJUST HINGES (if required)

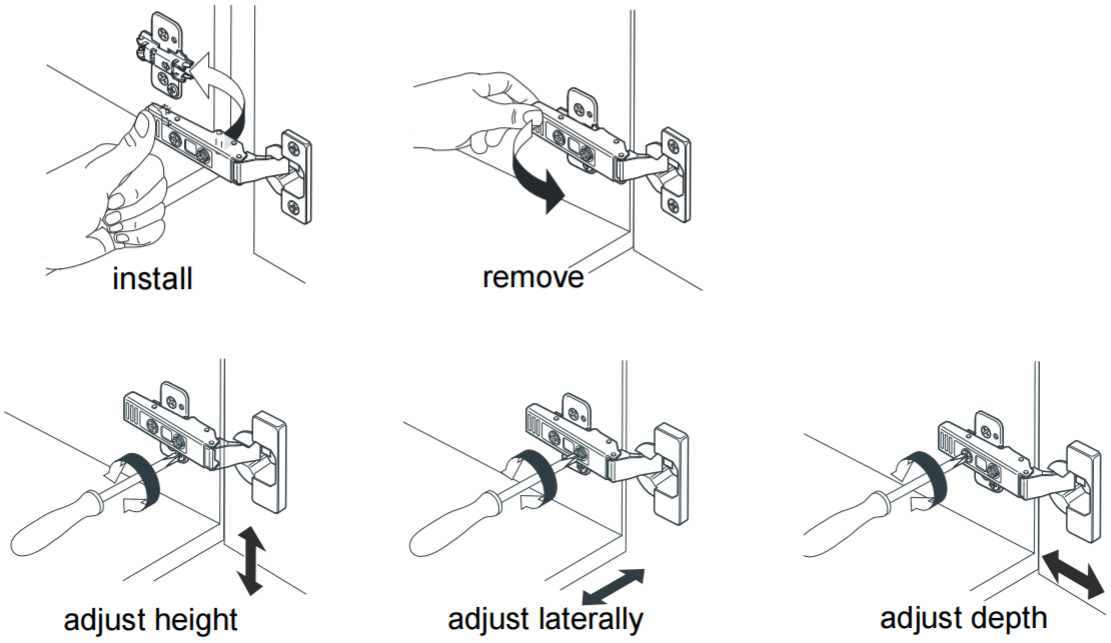

Note:sink style,shape,countertop,vanity may vary from the picture above. Instructional purpose only