











Installation 145-3

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	Seat	1	
	Seat cushion	1	
	Sofa cover	1	
	Inserted rod	2	
	Connecting buckle	1	
			
			Backrest
			
			Back cushion
			
			Legs
			
			Cover plate
			
			8x20mm screw

1 As shown in the figure: Insert the rod into the corresponding positions of the backrest.



2 Cover the hole with a cover plate.




3



3 Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

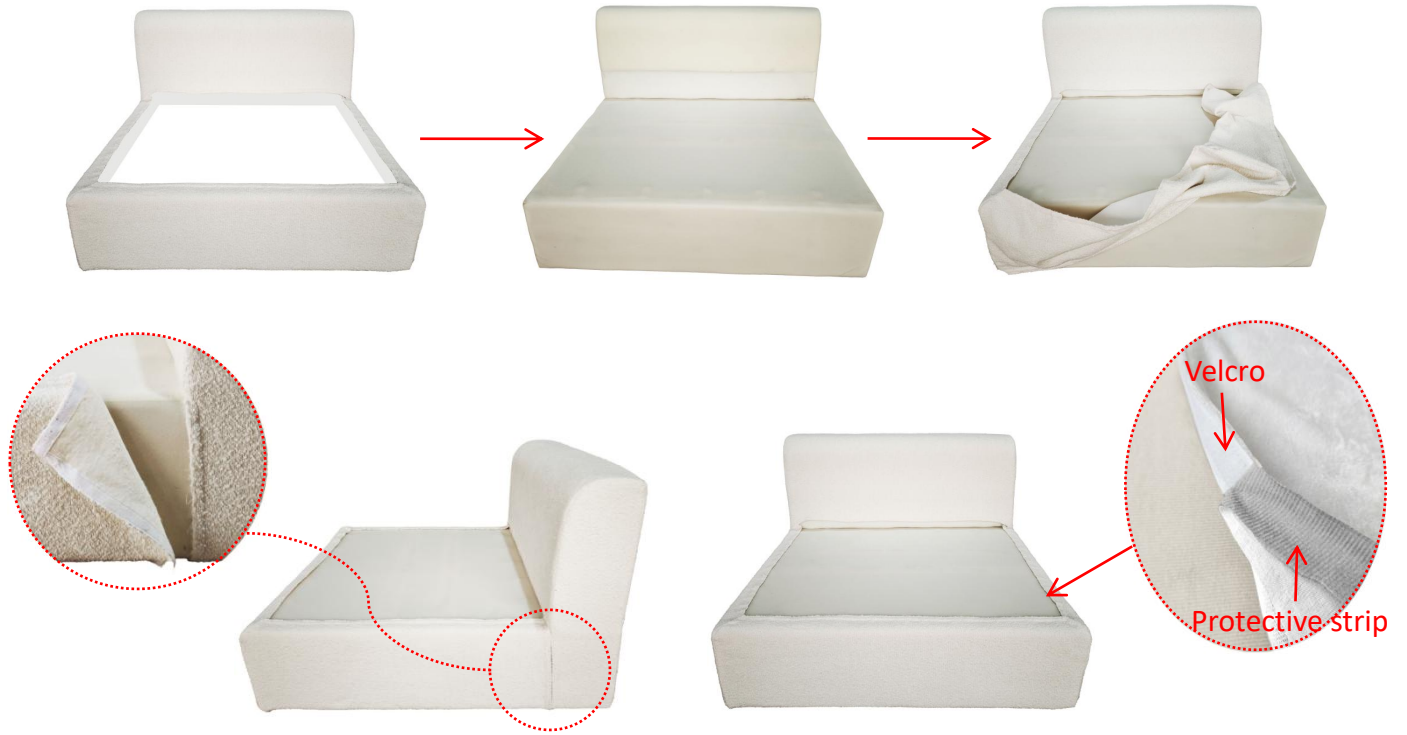


4  Secure the legs of the sofa.



5 Place the seat cushion and back cushion. Note that the side with the zipper on the cushion should face the back.



6 Apply the connection buckles to connect the seats together (or not, it's totally up to users).

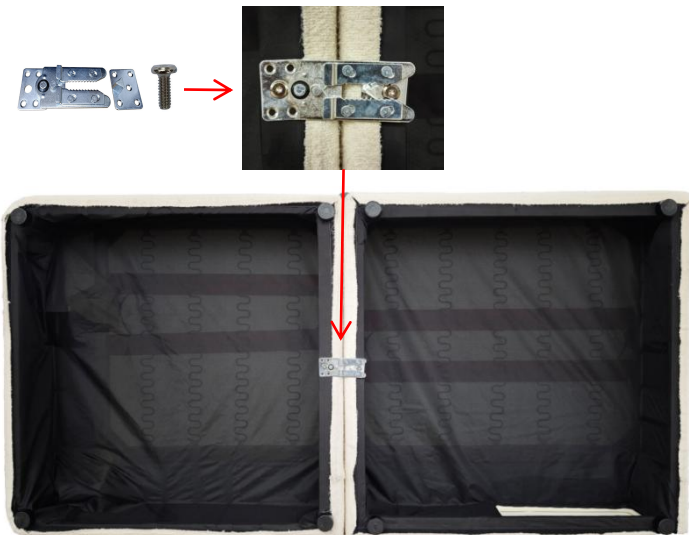

The seat cushion can be attached using Velcro.

