

## 24" C-SERIES BEER DISPENSER

**HC24TB-3-\*\*\*** 24" INDOOR MODEL

**HC24TO-3-\*\*\*** 24" OUTDOOR MODEL



Single Faucet Indoor



Two Faucet Indoor



630SS Forward Sealing  
Beer Faucet


### GENERAL C-SERIES FEATURES




- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior. Indoor models have black vinyl clad exterior; outdoor models have stainless steel exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Interior light and digital control
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

### HC24TB/TO FEATURES

- Available with stainless steel solid door or panel ready solid door
- Industry Exclusive Perlick patented stainless steel 630SS Forward Sealing Beer Faucet
- Air-cooled tower keeps beer cold from keg to tap
- Stores (1) 1/4 barrel or (2) 1/6 barrels
- Complete, self-contained beer system
- Portable drainer; no plumbing required
- 1- or 2- faucet tapping kit
- Low profile coupler for "D" system keg values and 630SS standard beer faucet included
- Beer Dispenser temperature 33° - 42°F



One 1/4 barrel  
(standard or slim)




Two 1/6 barrel

## PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	24" (610 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	5.2 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	305 kWh
Shipping Weight	222 lbs (100.7 kg.)

\*\* Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

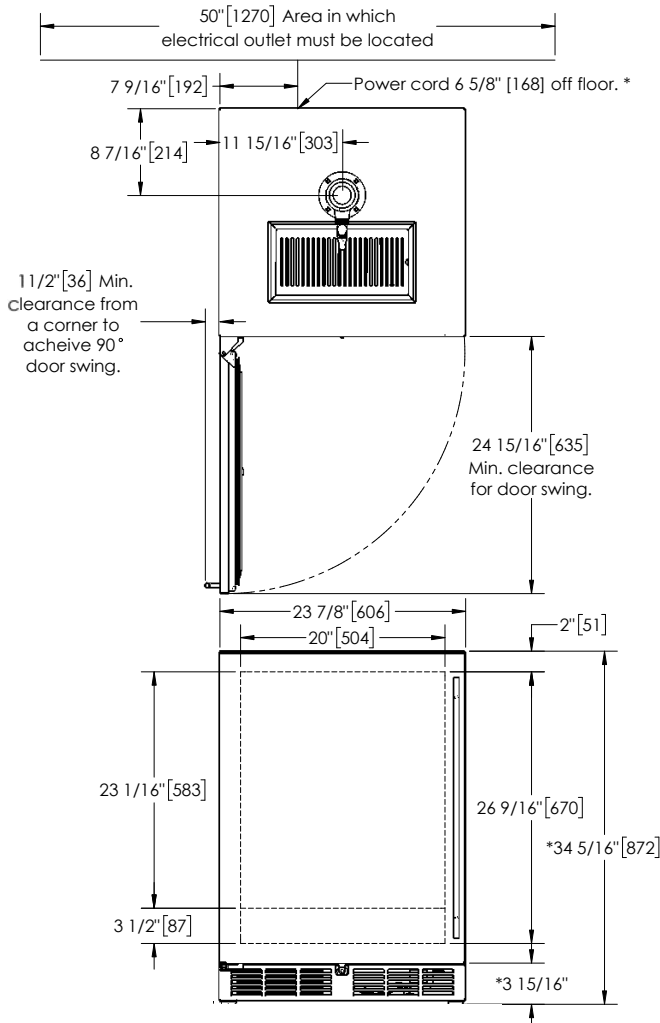

## INDOOR MODELS

HC24TB-3-1L#*	Stainless steel solid door, hinge left
HC24TB-3-2L#*†	Panel ready solid door, hinge left

## OUTDOOR MODELS

HC24TO-3-1L#*	Stainless steel solid door, hinge left
HC24TO-3-2L#*†	Panel ready solid door, hinge left

\* Also available hinge right (R)

# Add 1 for single faucet, 2 for two faucet


† This unit comes ready to accept customer-provided overlay panel and handle

## OPTIONAL ACCESSORIES

(L)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
63797	Beer Dispenser Cleaning Kit
40030S	Keg Coupler, Lo-Boy "S" Series
308-40C	Faucet Lock for C-Series 630SS Beer Faucets
BLC4/32	Beer Dispenser Sanitizer (4oz. or 32 oz.)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com/residential](http://perlick.com/residential)

\* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

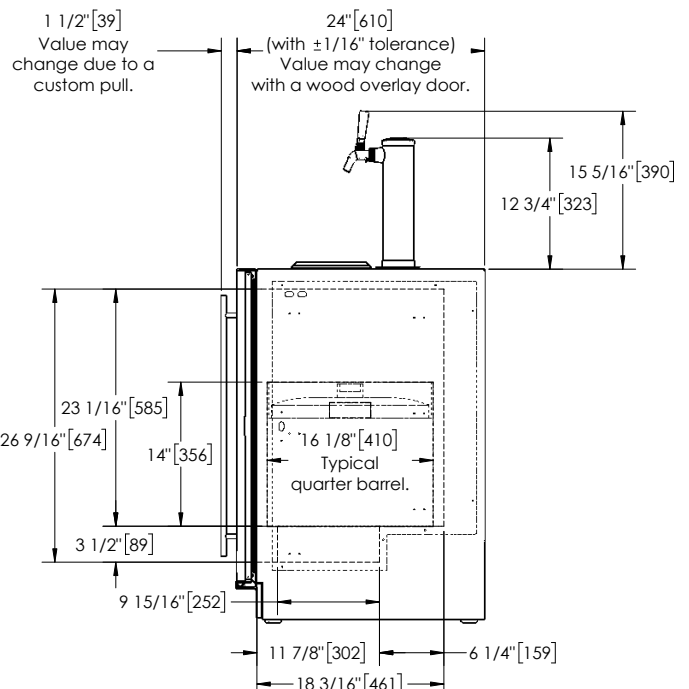

California Prop 65 Notice:

**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

FORM NO. Z2526  
REV. A-09/07/2018