

TWIN/KING HEADBOARD

King







Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference.


HARDWARE LIST

- A (4) 1/4" x 1/2" Allen Bolts
- B (4) 1/4" x 2" Allen Bolts
- C (4) Nuts
- D (8) Flat Washers
- E (1) Allen Wrench
- F (1) Open Wrench

PARTS LIST

- G (1) Headboard Panel
- H (2) Leg Extensions

PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	4		B	4	
C	4		D	8	
E	1		F	1	

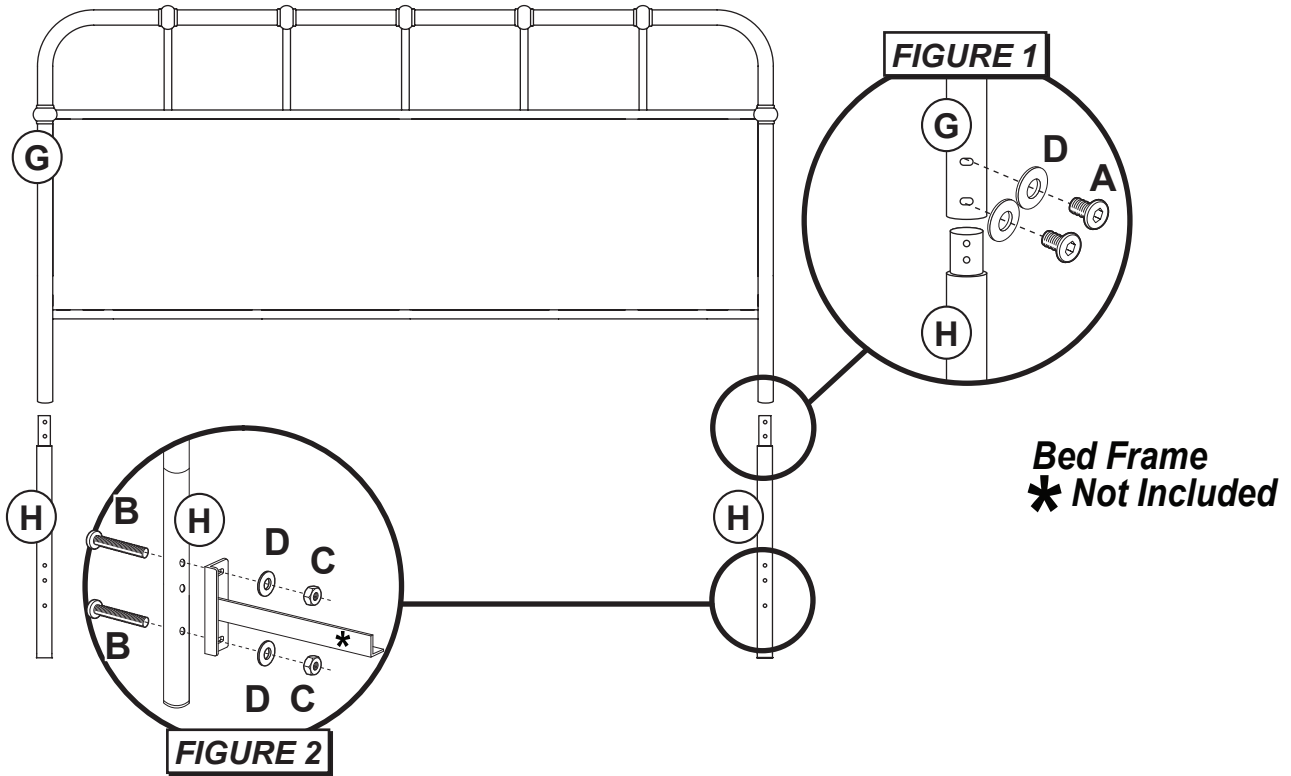

STEP 1 - Figure 1

Begin assembly by connecting Leg Extensions (H) to Headboard (G) using 2 Allen Bolts (A) & 2 Flat Washers (D). Tighten all bolts with Allen Wrench (E) provided.

STEP 2 - Figure 2

Next, attach the Bed Frame (*Not Included) to each Leg Extension (H) using 2 Countersunk Allen Bolts (B) from the outside, and 2 Flat Washers (D) and 2 Hex Nuts (C) per post. Tighten all nuts and bolts using the Allen & Hex Wrenches (E & F) that have been provided.