

### PRESSURE LITE® 1.0 TOILET K-3519

#### Features

- Vitreous china
- Elongated bowl
- Equipped with Sloan FLUSHMATE® – Sloan® Valve Company
- Polished chrome trip lever
- Less seat and supply
- 12" (305 mm) rough-in
- 1.0 gpf (3.8 lpf)
- 2-1/4" (57 mm) glazed trapway
- 11-1/2" (292 mm) x 9-1/2" (241 mm) water area
- 30-1/8" (765 mm) x 21-1/4" (540 mm) x 31-1/4" (794 mm)

ADA CSA B651 OBC



#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3519	Pressure-Lite 1.0 toilet	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3519-RA	Pressure-Lite 1.0 toilet	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3519-T	Pressure-Lite 1.0 toilet with tank cover locks	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3519-TR	Pressure-Lite 1.0 toilet with tank cover locks	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Recommended Accessories

K-4650	Lustra™ elongated open-front toilet seat — for Accessibility compliance	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
--------	---	----------------------------	--	-------------------------------------

#### Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 30-1/8" (765 mm) in length, 21-1/4" (540 mm) in width, and 31-1/4" (794 mm) in height with a 11-1/2" (292 mm) x 9-1/2" (241 mm) water area. Toilet shall be 12" (305 mm) rough-in. Toilet shall be 2-1/4" (57 mm) glazed trapway. Toilet shall be less seat and supply. Toilet shall have a 1.0 gal (4.0 L) per flush. Toilet shall be equipped with Sloan Flushmate - Sloan Valve Company. Toilet shall include a polished chrome trip lever. Toilet shall be Kohler Model K-3519-\_\_\_\_ or K-3519-\_\_\_\_-\_\_\_\_\_.

# HIGHLINE®

## Recommended Accessories

K-4664	Brevia™ seat with cover	<input type="checkbox"/> 0			<input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

## Technical Information

Fixture:	
Elongated bowl toilet	Two-piece, elongated
Water per flush	1.0 gpf (4.0 lpf)
Passageway	2-1/4" (57 mm)
Water area	11-1/2" (292 mm) x 9-1/2" (241 mm)
Water depth from rim	5-3/4" (146 mm)
Seat post hole centers	5-1/2" (140 mm)
Minimum static pressure required	35 psi (241 kPa)
Maximum static pressure	80 psi (551.6 kPa)

Included components:	
Bowl	K-4304
Tank	K-4484
Tank cover	1036375
Trip lever	K-9481

## Installation Notes


Install this product according to the installation guide.

For back-to-back installations, the toilet shall be connected to the vertical stack using one of the three following fittings: double fixture fitting, double combination wye and 1/8 bends, or double wye and 1/8 bends.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

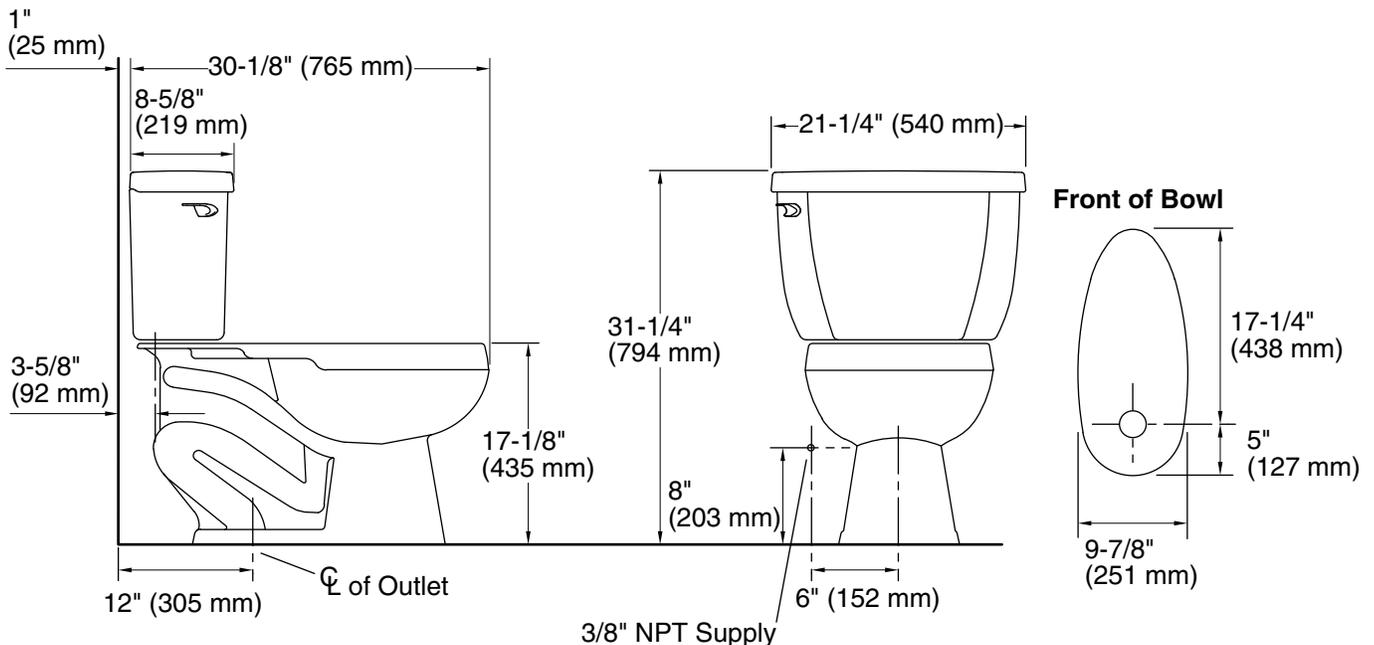

## Product Diagram