Wall Sconce

Installation Guide

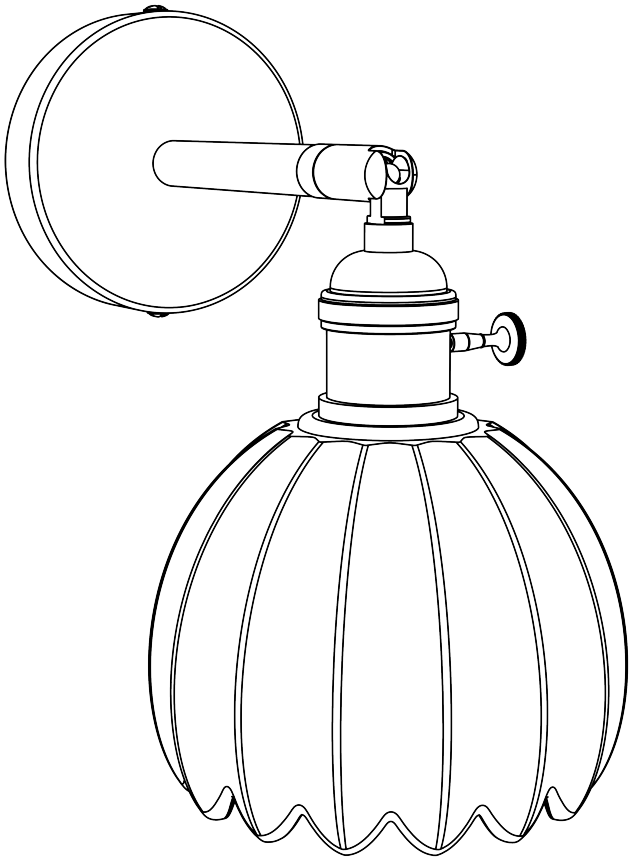

Thanks for your purchase and please share your experience with others

Installation Guide

Mount only on a sturdy surface to avoid injury or damage

Warming and Cautions

Please turn off the circuit breaker before installation and consult an electrician if unsure. Also, remember to turn off the fixture and wait for the bulbs to cool before replacing

Specifications

Voltage: 110-120v
Wattage: 60w
Material: Metal & Glass

Light Source



BULB BASE TYPE
Medium(E26)



Package Contents

Preparations:

Identify and inspect all parts before beginning the installation.Missing or damaged parts?

Parts Bag:



Crossbar Assembly x1

Outlet Box Screw x2



Brass Finish Body x1

Glass Lampshade x1

Install

STEP1 - Crossbar Assembly



A. Carefully remove your new vanity lamp from packaging.
B. Unscrew the Backplate Screw to remove the mount plate from the Backplate.
C. Attach your mounting board to the wall, or place the mounting board over the junction box.
D. Gently thread the wire from the junction box through the center hole of your mounting bracket, then secure the mounting bracket to the junction box by tightening the machine screws that come with your junction box.

Thanks for your purchase and please share your experience with others

STEP2 - Wiring



A. Next, have a helper support the fixture while you complete the wiring.
B. Connecting the outlet box Live Wire with lights "L" wire.
C. Connecting the outlet box Naught Wire with lights "N" wire.
D. Grounding to ground (green or copper)

NOTE: Must cut off the power supply to avoid electric shock!!!

Live Wire from outlet box		"L" wire from fixture
Naught Wire from outlet box		"N" wire from fixture
Bare ground wire from outlet box		Ground wire from Fixture



*Green Ground Screw on crossbar optional

E. Twist the ends of the wire pairs together, andthen twist the wire connector, Tuck the wires intothe mounting bracket. Finally, loop the sconce'saround wire around the qrounding screw thatwas partially installed into the mounting bracket, Once that wire is looped, tighten the screw.if there is no ground wire (green or copper) coming from the junction box, contact a certified professional electrician.

STEP3 - Install Body



Place the backplate against the wall, making sure the holes on the top and bottom of the backplate are aligned with the holes in the mounting plate.
Secure the backplate to the mounting plate with the backplate screws.

STEP4 - Glass Shade



Remove the metal ring from holder rods. Secure shade to the socket with metal rings

STEP5 - Bulb



Install E26 bulb
In accordance with your vanity light's specifications

Thanks for your purchase and please share your experience with others

Warranty

If your product is found to be faulty due to poor Materials, workmanship, or functionality after inspection by our customer support team, we will determine the appropriate course of action. This may include replacement parts, a full product replacement or a full refund. If you encounter the following problems during the use of our products, we will provide free repair services:

A. Scrarch;
B. Non-functional lamp head problems;
C. Broken products(photo evidence required);
D. Missing essential accessoried from the package(photo evidence required);
E. Damage caused by workmanship and quality issues during installation(photo evidence required);

However, in the following cases, we will not be able to provide free warranty services for your products:

A. Product damage or damage to home circuits caused by improper installation or installation by an unlicensed electrician;
B. Nodal wear and tear, including bulbs, aging wires, etc;
C. Parts not listed in the item list, such as bulbs, extra screws, extra rods, chains, etc.
D. Use of the product in an environment outside the recommended use site.

For any replacement parts or installation issues, please Contact Us!

Thanks for your purchase and please share your experience with others