


Assembly & Installation Instructions

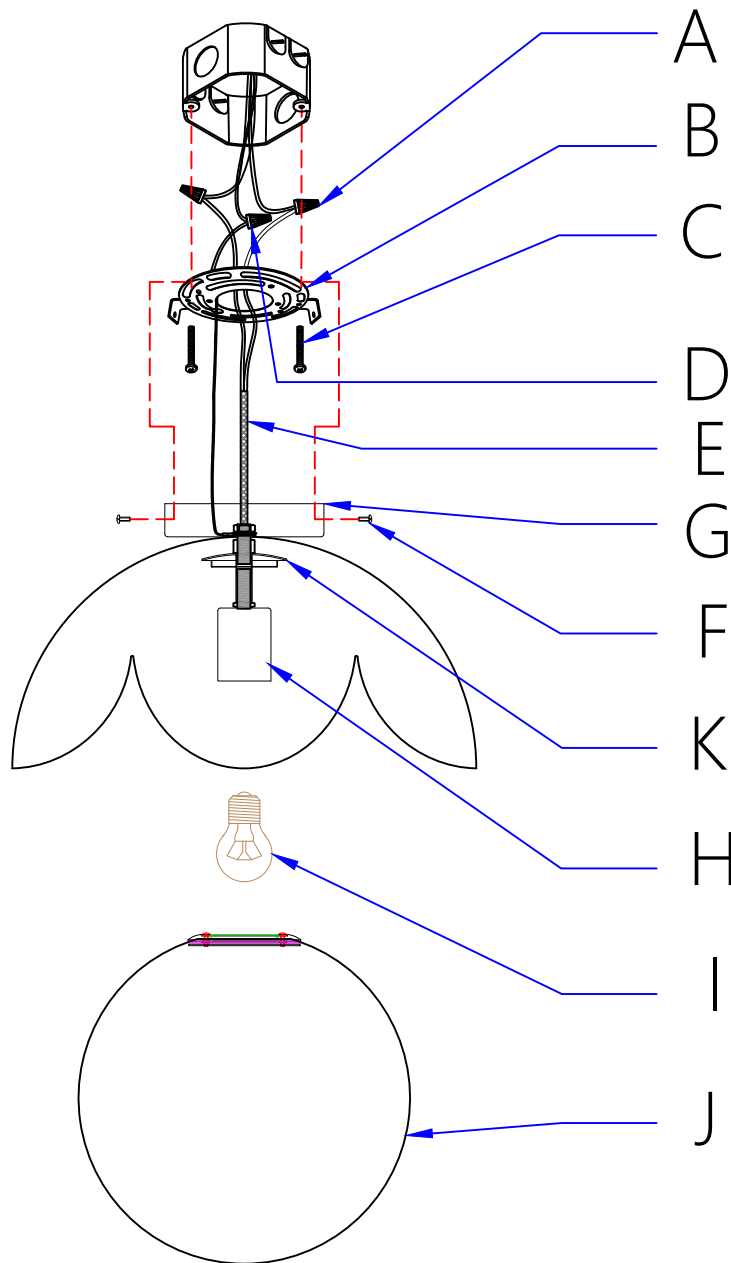

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Turn off the power.
2. Secure the mounting bracket (B) to the junction box with the mounting screws (C).
3. Connect the wires by using the wire caps (A) as follows:
Connect the fixture's LIVE wire (E) to the home LIVE wire.
Connect the fixture's NEUTRAL wire (E) to the home NEUTRAL wire.
Connect the fixture's ground wire (D) to the home ground wire.
Secure the fixture's ground wire (D) to the mounting bracket with the green grounding screw.
Then, tuck all wires into the junction box.
Note: make sure no bare wires are exposed to prevent electric leakage.
4. Secure the canopy (G) to the mounting bracket (B) by using screws (F).
5. Install the bulbs (I) (not included) into the lamp holder (H).
6. Screw the lampshade (J) clockwise onto the curved aluminum component (K).
7. Restore the power.