


INSTALLATION MANUAL

CEILING FAN WITH LIGHTS



TOOLS REQUIRED

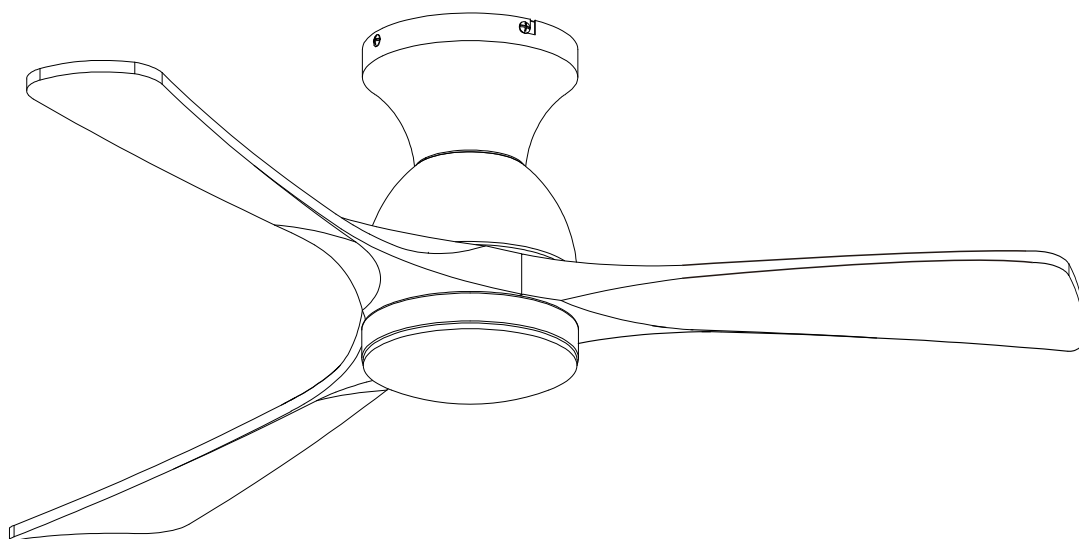


Ladder



Pliers




Wire Strippers






Screwdrivers

PACKING LIST

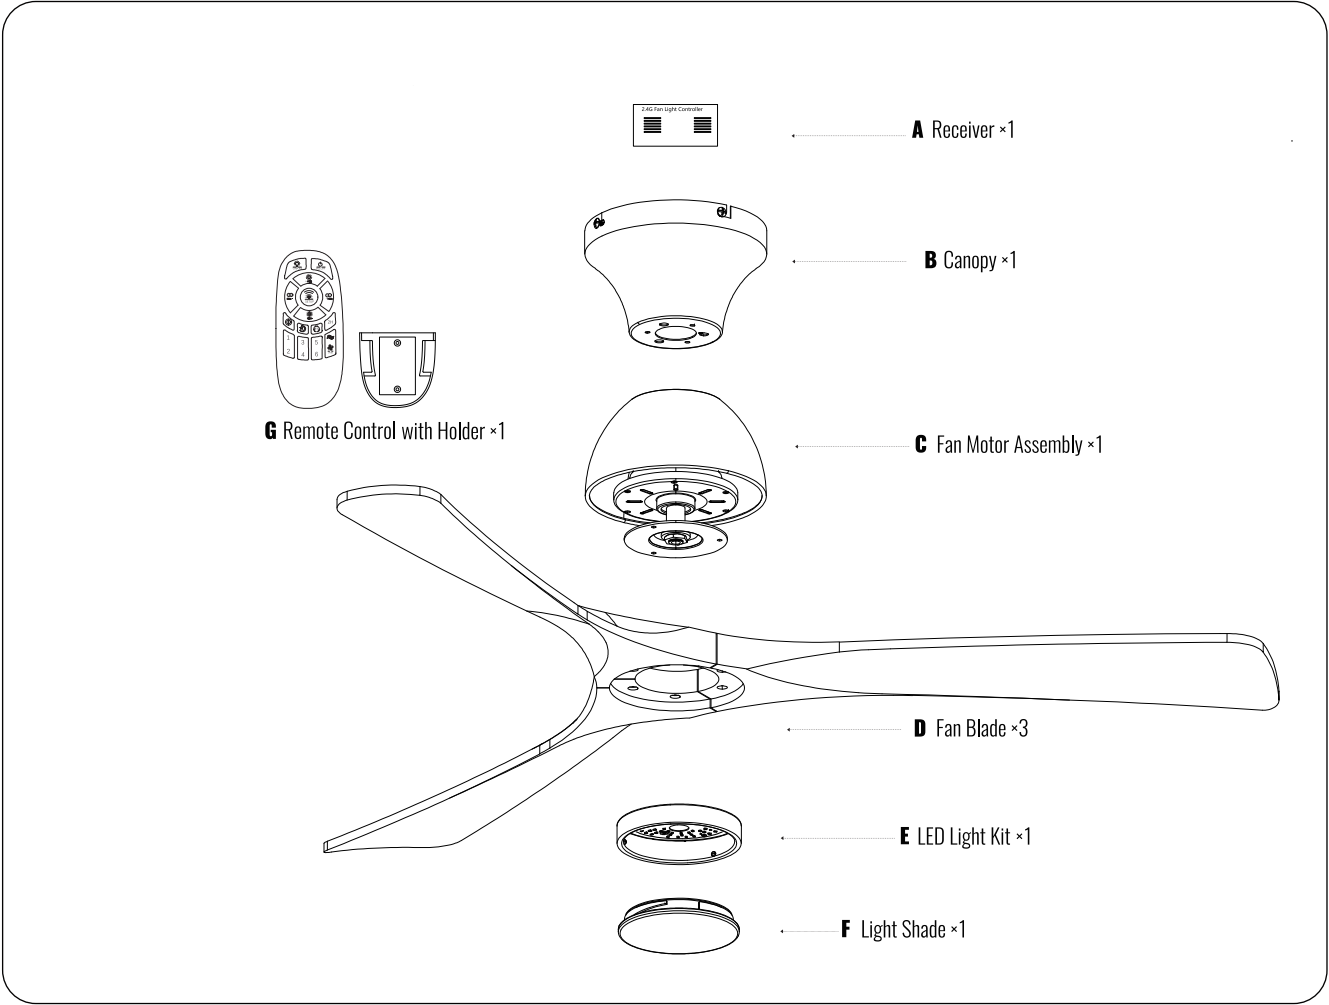

INSTALLATION KIT

AA  Wire Nut 3×	BB  Fan Blade Screw 6×	CC  Gloves 1×	DD  Fan Blade Spacer 3×
EE  Mounting Bracket 1×	FF  Outlet Box Screw With Washer 2×	GG  Canopy Screw 4×	HH  Set Screw 3×


Note:

- 1. Some extra hardware may be included. The quantity listed above is the number required for installation.
- 2. Parts "EE" have already been installed with Canpy (B).

INSTALLATION


1. Remove the Mounting Bracket

- Step 1. Loosen and remove the canopy screws (GG) from the round holes, and loosen the canopy screws in the 'L' holes but do not remove them.
- Step 2. Secure the mounting bracket (EE) onto the outlet box with screws taken off or Outlet Box Screw With Washer (FF) provided.

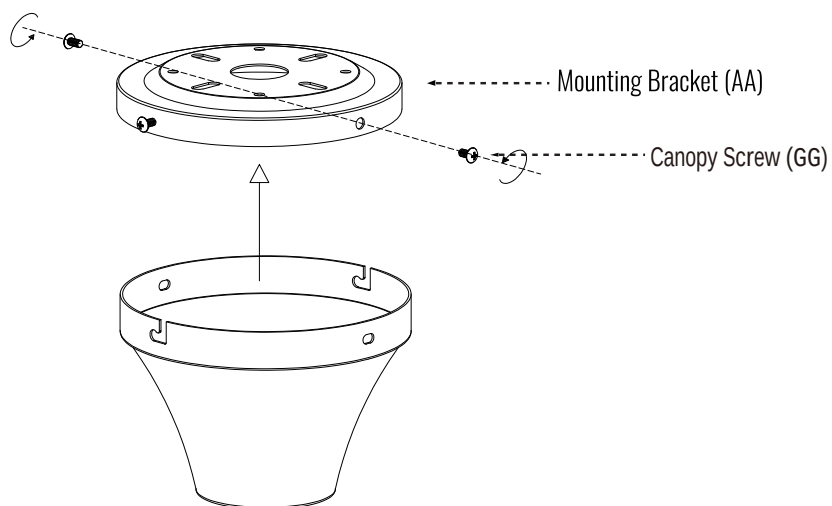


2. Install the Mounting Bracket

- Step 1. Take off the screws from outlet box.
- Step 2. Secure the Mounting Bracket onto the outlet box with screws taken off or Outlet Box Screw with Washer (FF) provided.

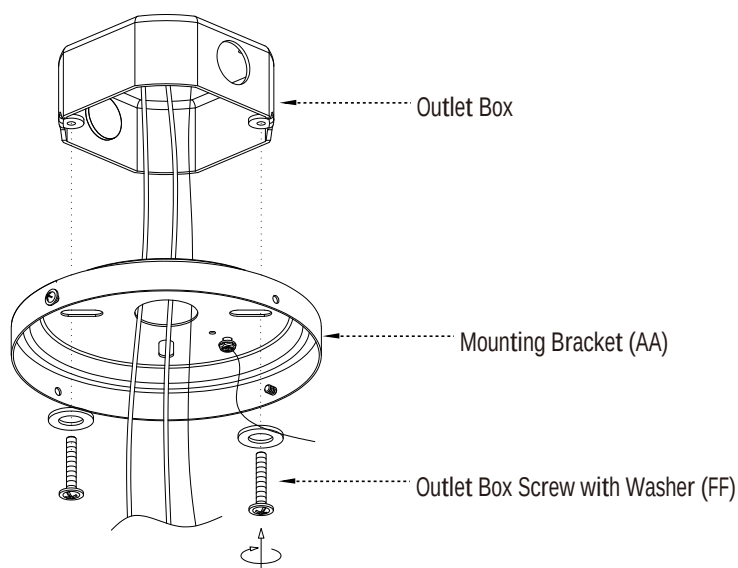

3. Assembling the Canopy

Step 1. Take off three Fixing Screws on the Fan Motor Assembly as shown in the diagram, then thread the Main Wire through the Canopy.
Step 2. Align the Small Holes on the Canopy with the Screw Holes on the Fan Motor Assembly (the other screws which were not taken off were threaded through the Large Holes on the Canopy), and secure the Canopy to the Fan Motor Assembly with Screws taken off.

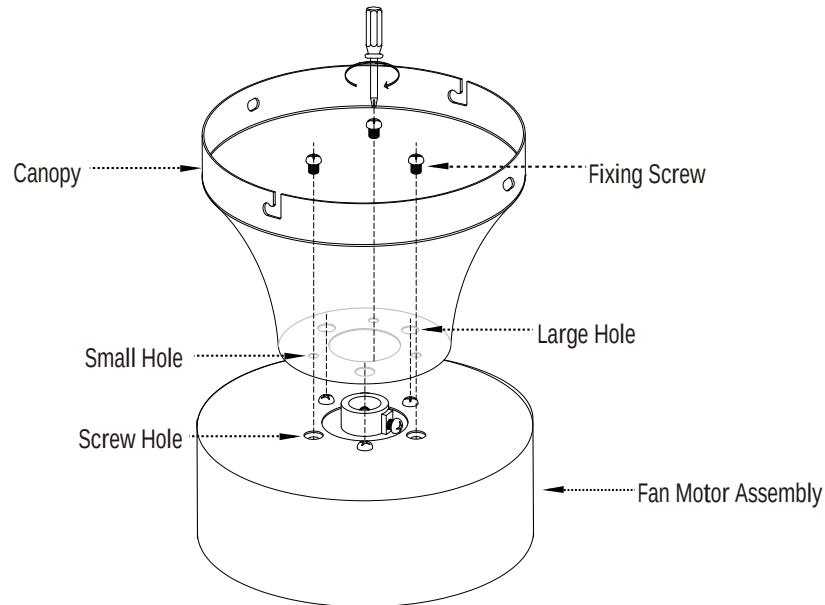


4. Wiring

Step 1. Connect the wires from the fixture to the house supply wires with wire nuts (AA), ground wire (green, green/yellow, or bare copper) to ground wire, neutral wire (white or blue) to neutral wire, and hot wire (black or brown) to the hot wire.

Step 2. Wrap the connection with electrical tape.

Note:


- ① This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote control.,
- ② This fan can only be connected to an on/off switch if you have one, not a dimmer switch.

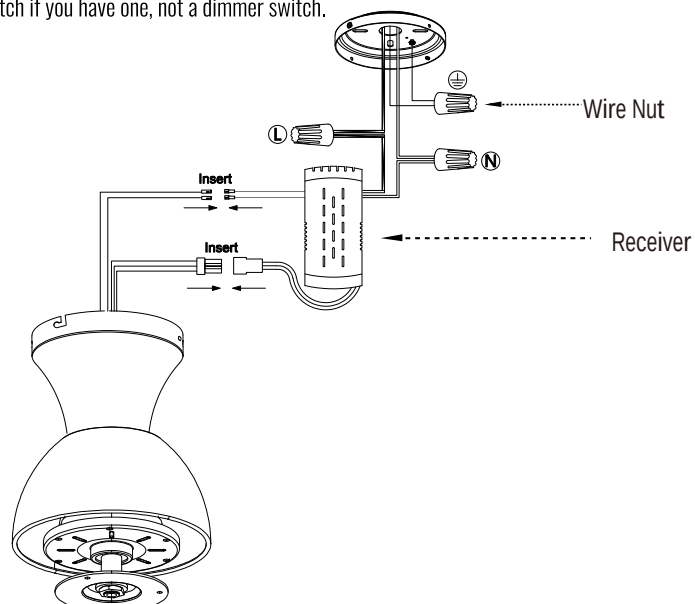

5. Attaching the Canopy


Step 1. Slide the canopy up to the ceiling and attach it to the mounting bracket with the set screws provided.

Step 2. Slide the coupling cover downward to cover the yoke and fix the canopy ring to the canopy.

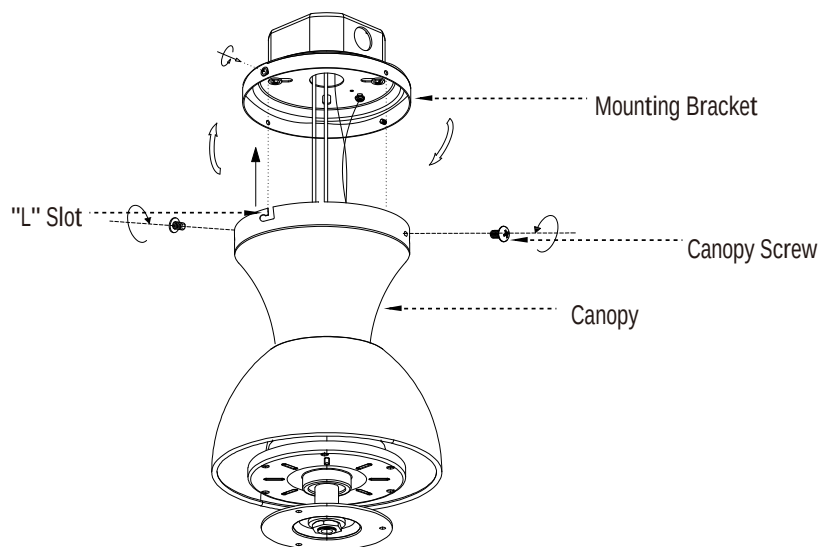


6. Installing the Fan Blade

Step 1. Attach the Fan Blade onto the motor with the Fan Blade Screws and Fan Blade Spacer.

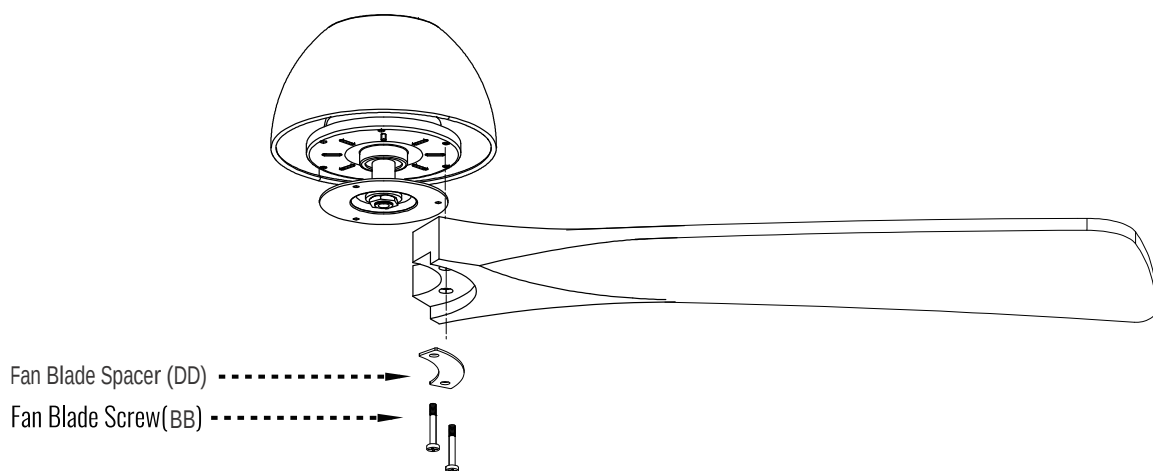


7. Install the LED Light Kit

- Step 1.** Take off Set Screws (HH) from the Fan Motor Assembly.
- Step 2.** Connect the Light Wires from the Light Kit to the fixture wires.
- Step 3.** Attach LED Light Kit onto the Fan Motor Assembly with Set Screw (HH) provided.

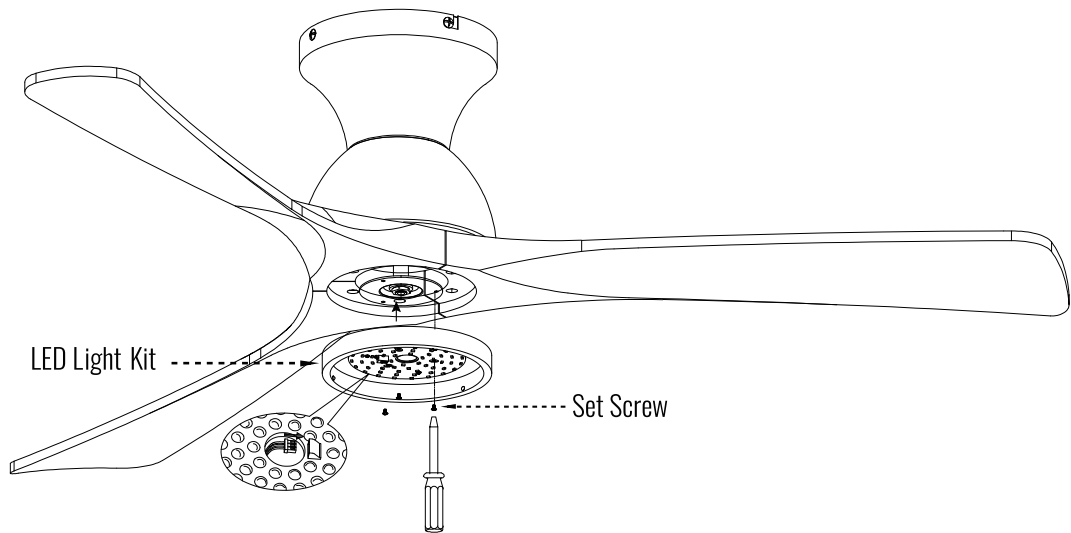


8. Install the Light Shade

- Step 1. Rotate the light Shade (F) clockwise to secure it to the Fan Motor Assembly (C).

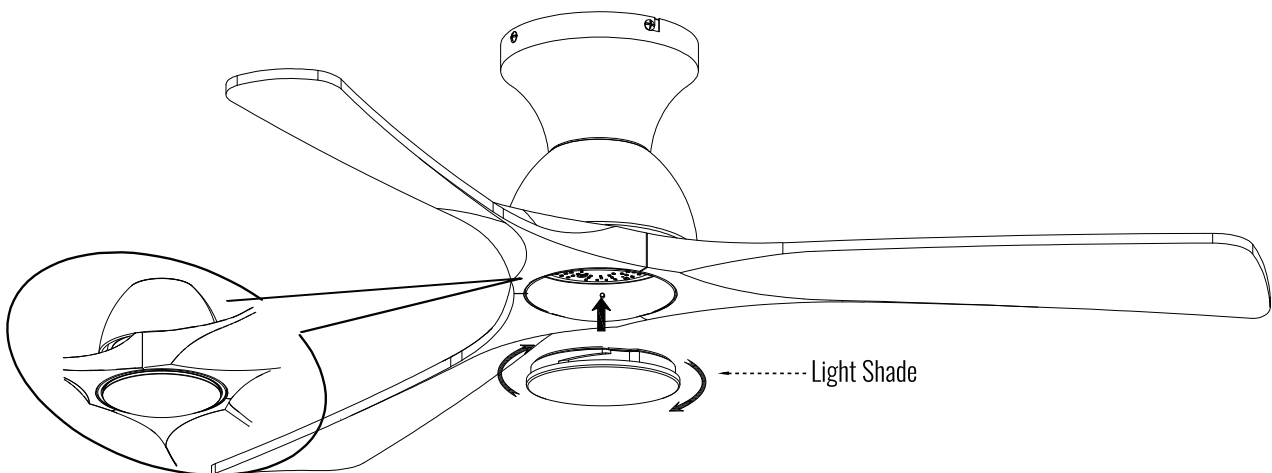

REMOTE CONTROL INSTRUCTIONS


- ① :Turn on/off the light
- ② :Turn off fan and light.
- ③ ⑦ :Adjust the brightness of the light.
- ④ ⑥ :Adjust the light color temperature.
- ⑤ :Quick switch of the light color: warm white->cool white->daylight white.
- ⑧ :Turn on/off the mute mode.
- ⑨ :2H for timing the fan.
- ⑩ :Night mode, lights will be dimmed when press this button
- ⑪ :Fan moves forwards or reversely
- ⑫ :Turn on the fan on speed 1/2/3/4/5/6.
- ⑬ :Natural wind of the fan, fan speed will change automatically when use this function.
- ⑭ :Turn off the fan.

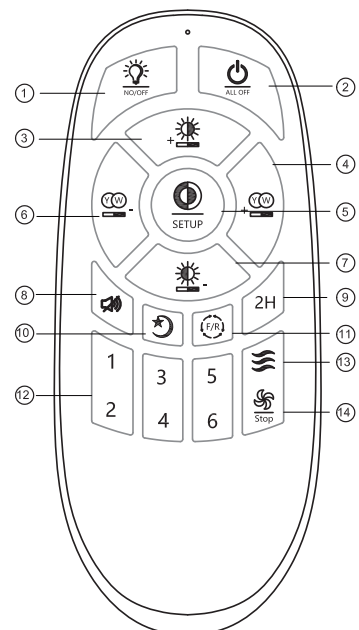

REMOTE SIGNAL PAIRING:

If the remote control loses signal of the fan, press and hold the button ⑤ at the very beginning after it's turned on from wall switch. After the light flashes or fan beeps, it's done.

APP CONTROL INSTRUCTIONS

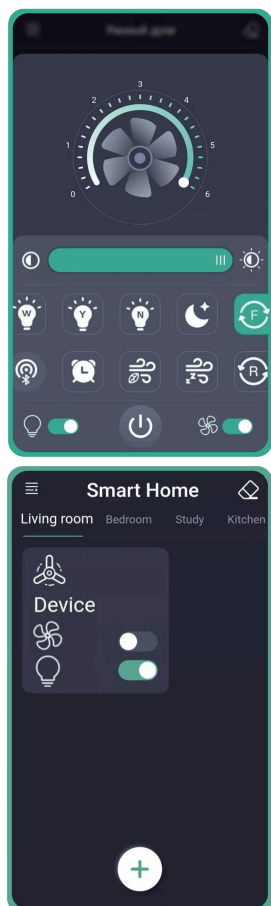

	Pair button. Click it within 5 seconds after the fan is powered on from wall switch. After the fan flashes or beeps it has been successfully paired with the phone; it can be controlled through it.
	Slide to change the fan speed.
	Slide to change the brightness of the light.
	Quick switch for "White" light color.
	Quick switch for "Yellow" light color.
	Quick switch for "Natural" light color.
	Night mode: Dim the lights.
	Fan moves forward.
	Fan moves reversely.
	Change the direction of the wind. (Not supported)
	Timing the fan.
	Natural wind: The fan speed will change automatically when you use this function.
	Sleeping wind. (Not supported)
	Turn on/off the light.
	Turn on/off the fan.
	Unpairing: Click the unpair button within 5 seconds after turning on the fan. Once the fan flashes or beeps, it has been successfully unpaired from your phone.