

Assembly Instructions

Caution : You must read this before you proceed

Care & Maintenance



- Not for commercial use. For residential use only.



- Furniture may scratch floors. We recommend using furniture pads to protect your floors.



- Do not put hot items directly on furniture surface.



- Do not clean furniture with harsh cleansers or polish.



- Do not place furniture under direct sunlight.



- Do not place furniture near heating or cooling vents.



- Do not write on furniture without a padded barrier to protect the surface.



- Do not place furniture outside . For indoor use only.



- Stains may be removed with mild soap solution and damp cloth.




- Children should not climb or jump on the furniture.







- Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in carton for hardware pack and legs.


BARSTOOL

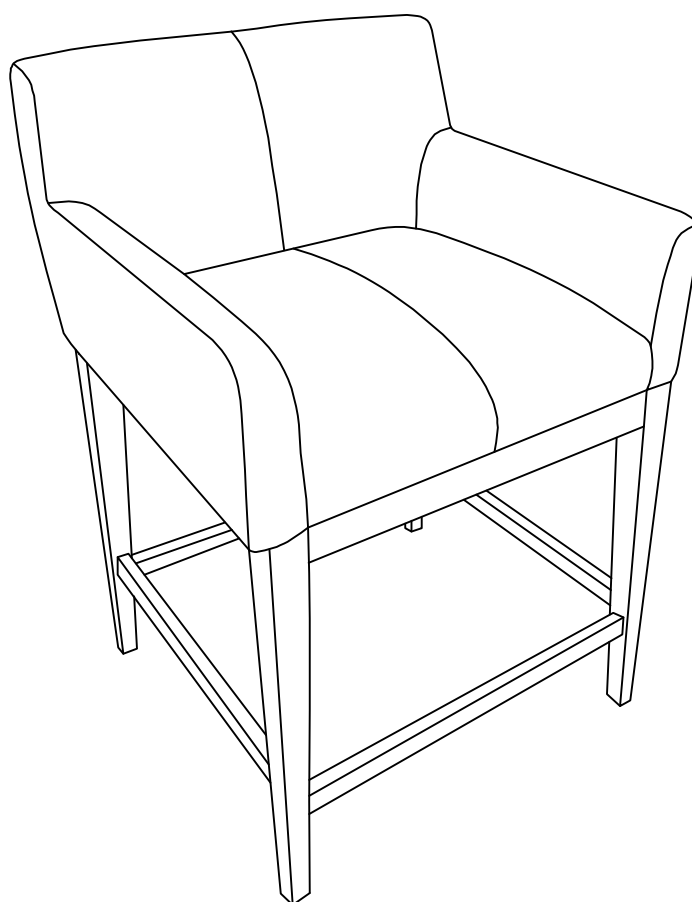

Parts List


Label	Picture	Description	QTY
A		Chair Seat	1
B		Left Front Leg	1
C		Right Front Leg	1
D		Left Back Leg	1
E		Right Back Leg	1
F		Front / Rear Panel	2
G		Side Stand	2

Hardware

Label	Picture	Description	QTY
①		Bolt (M8*60mm)	9
②		Spring Washer (M8)	9
③		Flat Washer (M8)	9
④		Bolt (M4*35mm)	9
⑤		5mm Allen Wrench	1
⑥		Screwdriver	1

Assembly Preparation

Before
Beginning
Assembly:

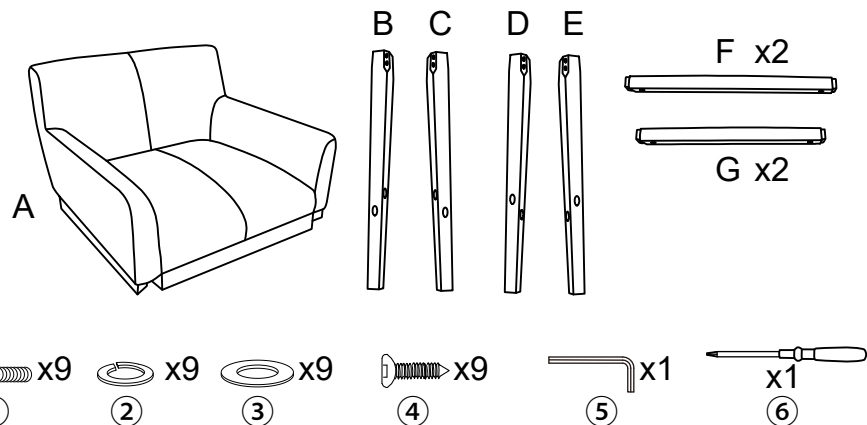

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


Assembly Steps

Overview

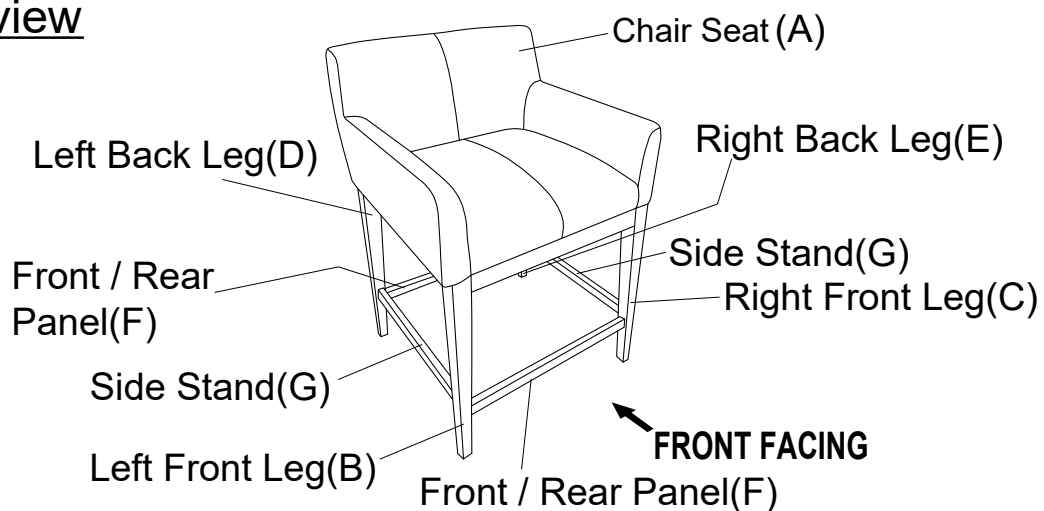

This Barstool has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


Step 1

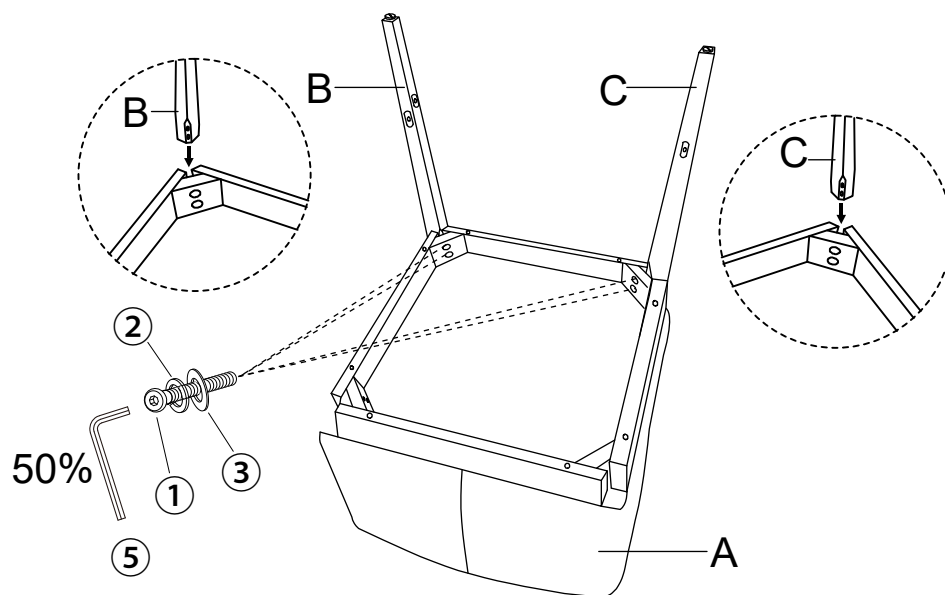

Now, you will make the bottom of the Chair Seat(A) and the Front Legs (B & C) face upwards.


Fully insert the Front Legs(B & C) vertically into the seat frame joint, and use 4 Bolts(①) + 4 Spring Washers(②) + 4 Flat Washers(③) and an Allen Wrench(⑤) to tighten them to 50%.

Step 2

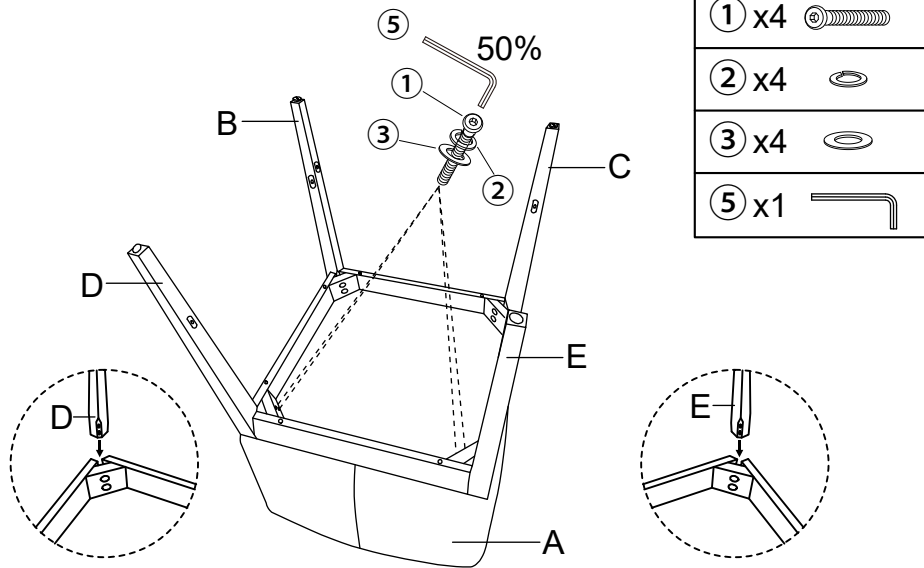


Insert the Back Legs(D & E) into the bottom of the Chair Seat(A) and align them with the holes. Use 4 Bolts(①), 4 Spring Washers(②), 4 Flat Washers(③), and an Allen Wrench(⑤) to lock them to 50%.

Step 3

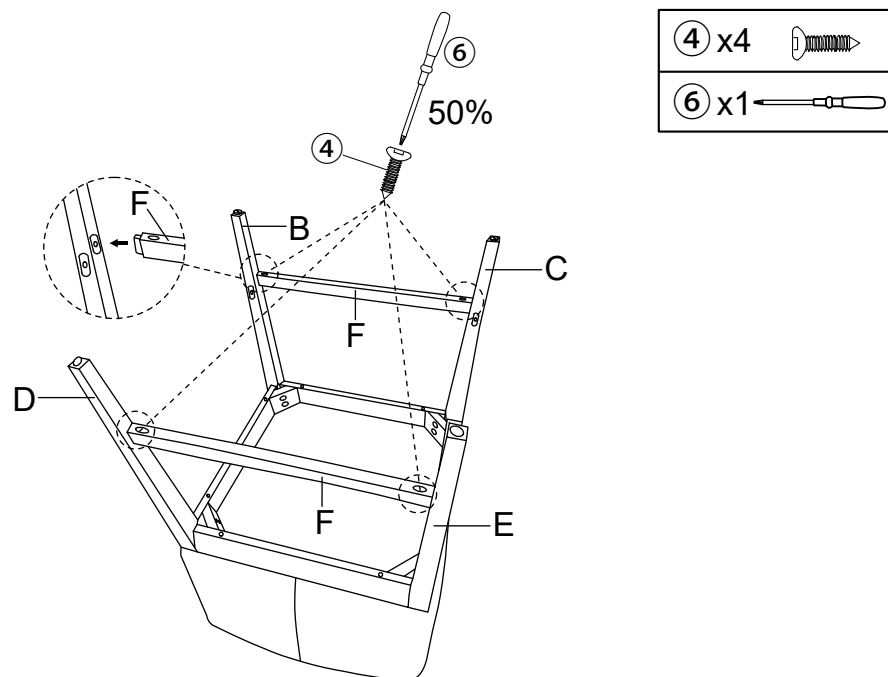


Insert the two Front / Rear Panel(F) into the Front and Back Legs holes respectively. Use 4 Bolts(④) and Screwdriver(⑥) to lock them to 50%.

Step 4

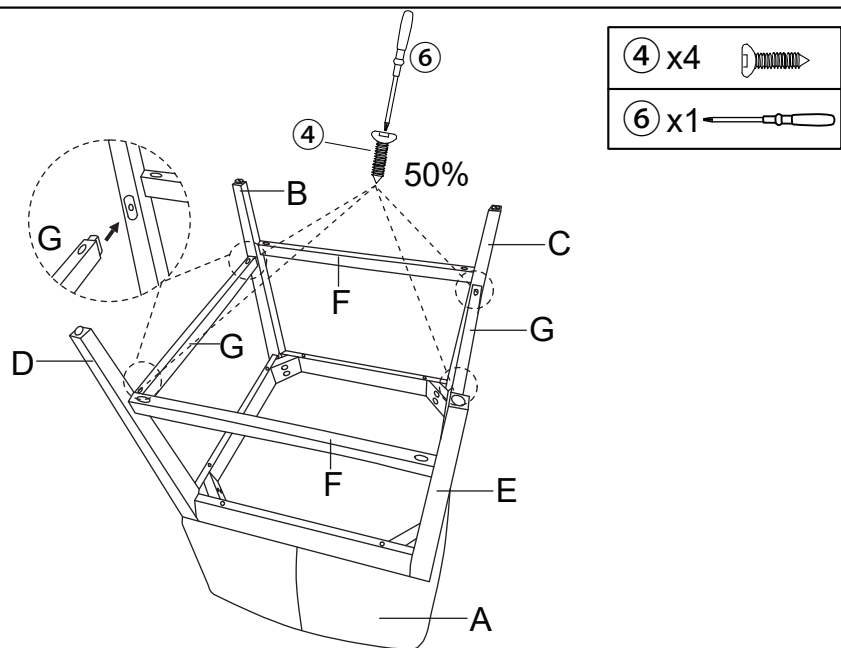


Insert the two Side Stand(G) into the Front and Back Legs holes respectively. Use 4 Bolts(④) and Screwdriver(⑥) to lock them to 50%.

Step 5

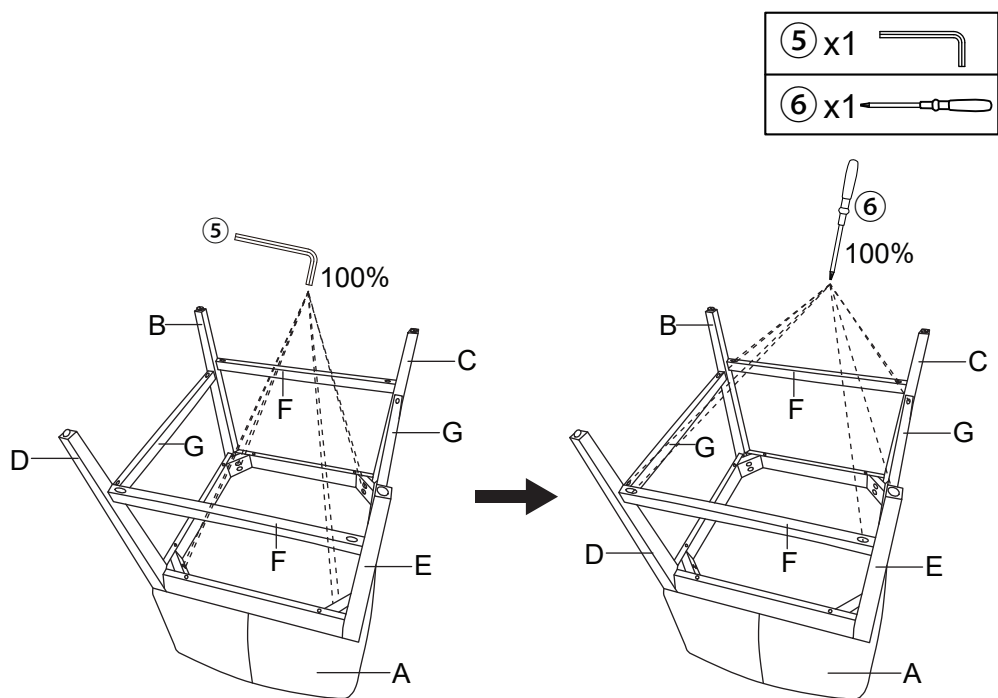

Tighten all Bolts 100%.

Step 7

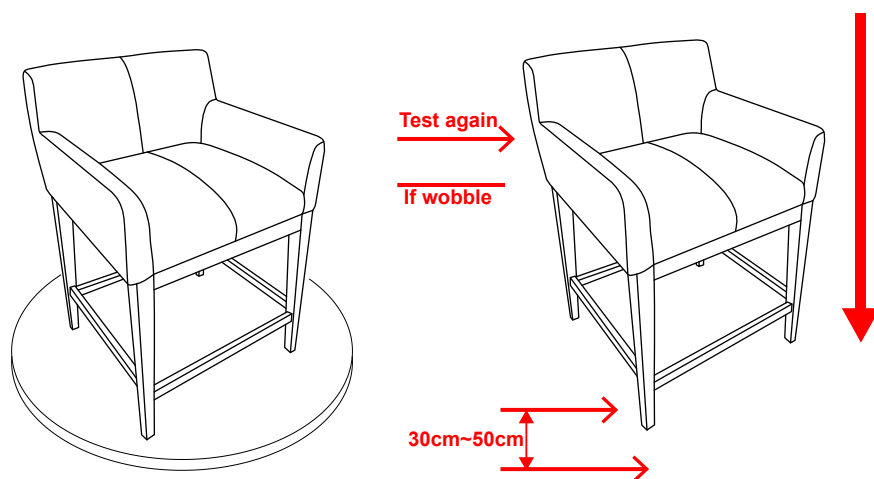

Place the Barstool on a **LEVEL SURFACE** to check if it wobbles.

If it wobbles, lift the Barstool some 30cm to 50cm high from the ground, keep your feet and toes well away from the drop zone.

Drop the Barstool freely and vertically with all four legs, hitting the ground at the same time.

This Drop Test will help to ensure that all the Bolts and gaps to all reach full alignment.

Test again for evenness on **LEVEL SURFACE**.

If no wobbles are found, proceed to tighten all the Bolts.


CAUTION: When tightening the Bolts, tighten sequentially.

DO NOT tighten any Bolts fully and then towards the next one, this would cause the frame to warp.

If it still wobbles, loosen the Bolts and execute this same drop test.


WARNING !!! IF THE DINING CHAIR IS NOT STABLE IT COULD LEAD TO DAMAGE TO THE PRODUCT.

Step 8

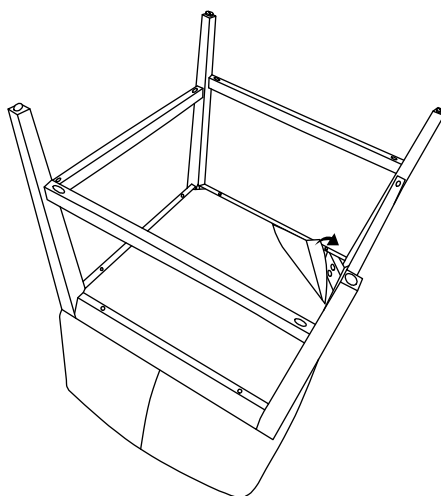

Place the Seat Base Cover back as shown in picture.
Smooth the Magic Tape down, Make sure all parts are connected and securely locked into position.

Step 9

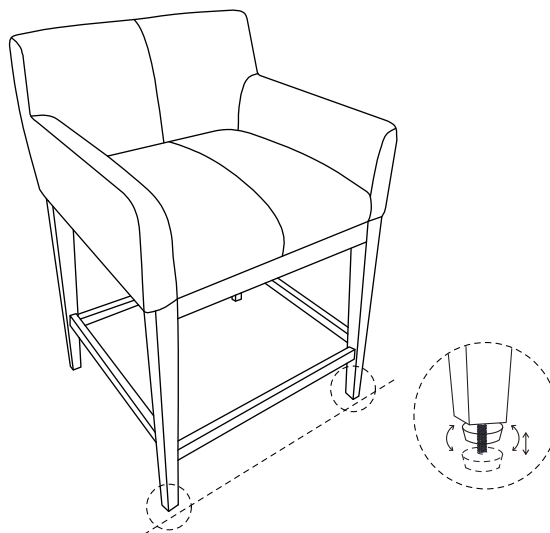

Your Barstool is ready for use.
This Barstool can only be used on a flat, level surface.