


### Features

- Acrylic
- Left or right outlet
- Integral apron
- Integral tile flange
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm)

### 6' BATH WITH INTEGRAL APRON K-1259-LA ALSO K-1259-RA

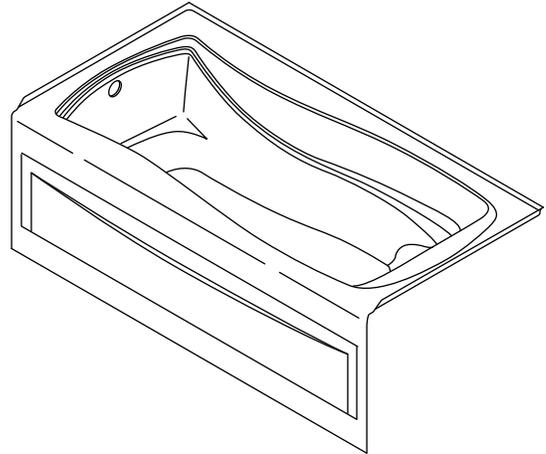

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1259-LA	Bath with integral apron – left-hand drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1259-RA	Bath with integral apron – right-hand drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Recommended Accessories			
K-7166-AF	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

### Product Specification

The acrylic bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. The bath shall have a left or right outlet. The bath shall have an integral apron and tile flange. The bath shall be Kohler Model K-1259-\_\_\_\_\_-\_\_\_\_\_.

# MARIPOSA®

## Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	50" (1270 mm) x 24" (610 mm)
Basin area, top	65" (1651 mm) x 27" (686 mm)
To overflow:	
Water depth	14" (356 mm)
Capacity	72 gal (272.5 L)
Weight	77 lbs (34.9 kg)
* Approximate measurements for comparison only.	


## Installation Notes

Install this product according to the installation guide.

Refer to installation instructions included with fixture before beginning installation.

**NOTICE:** Unless otherwise specified, floor support under bath must provide for a minimum of 39 lbs/square foot (191 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

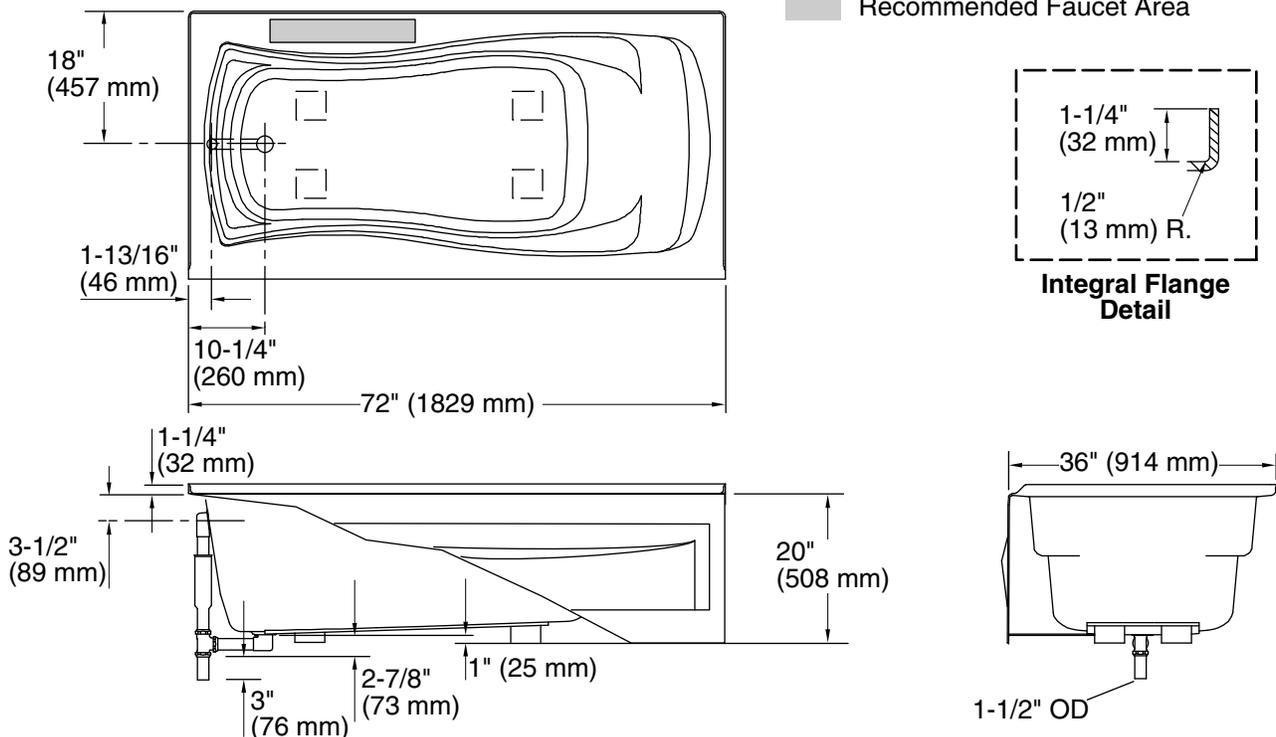

## Product Diagram