


Swivel Accent Chair

INSTRUCTION MANUAL

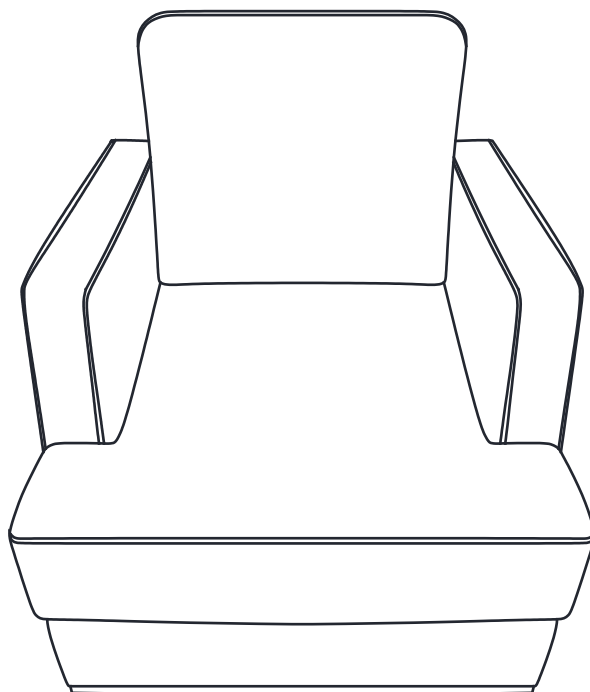

Note:

1. Please confirm all parts are correct before you assemble
 2. Do not tighten fastening fully until assembly is complete
 3. DO NOT USE POWER TOOLS. Power tools can overtighten screws.
- If you have any questions, please feel free to contact us.

FAQ

Q1:Missing parts when received.

A1:If you find some parts are missing from the box, please kindly send us messages to let us know the name of missing parts according to the parts list of the instruction, we will send you the replacement asap

Q2: Difficult to assemble

A2:It is best for two people to install the sofa. If there are any problems during the installation process, you can take photos and send them to us, and we will reply promptly. There are also installation videos on our page that you can view online.













Q3:Some parts were damaged when arrived.

A3:Please send us the clear photo of the damaged part as an attachment, we will check it and offer you the best solution soon.

Q4:Want to return the product.


A4: Before returning the item, please contact us regarding the return issue.Please make sure that the box packaging is complete, the product is not damaged, stained, and does not affect secondary sales.Products returned without the original packaging may be rejected, and we may request pictures to be provided.

BOX CONTAINS



STEP 1: Assemble armrests and back frame


Insert the left and right armrests into the pins of the backrest, and make sure the pins are fully inserted all the way in.

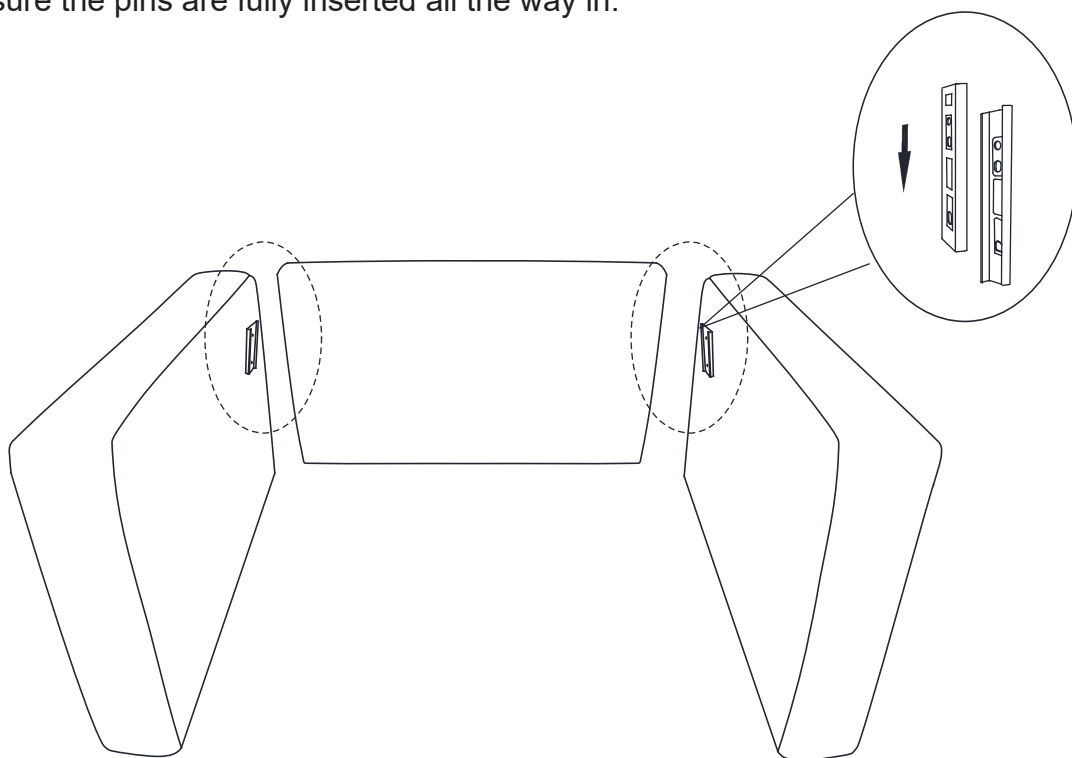

STEP 2: Install the seat frame

Place the armrest back frame upside down on a flat surface. Align the seat frame with the holes of the armrest, then fasten with Screw (A) through Washer (B).


A		4PCS
B		4PCS
C		1PC

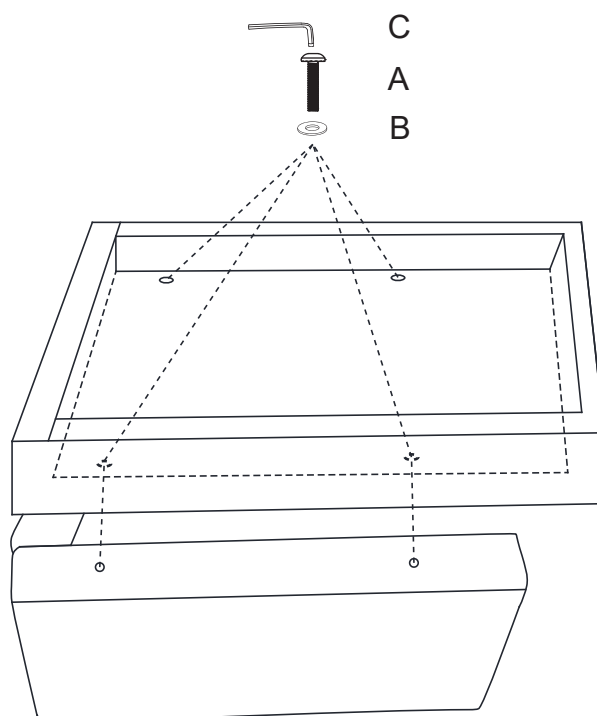

STEP 3: Install the cross rail

Align the cross rail with the holes of the seat frame, then fasten with Screw (A) through Washer (B).


A		4PCS
B		4PCS
C		1PC

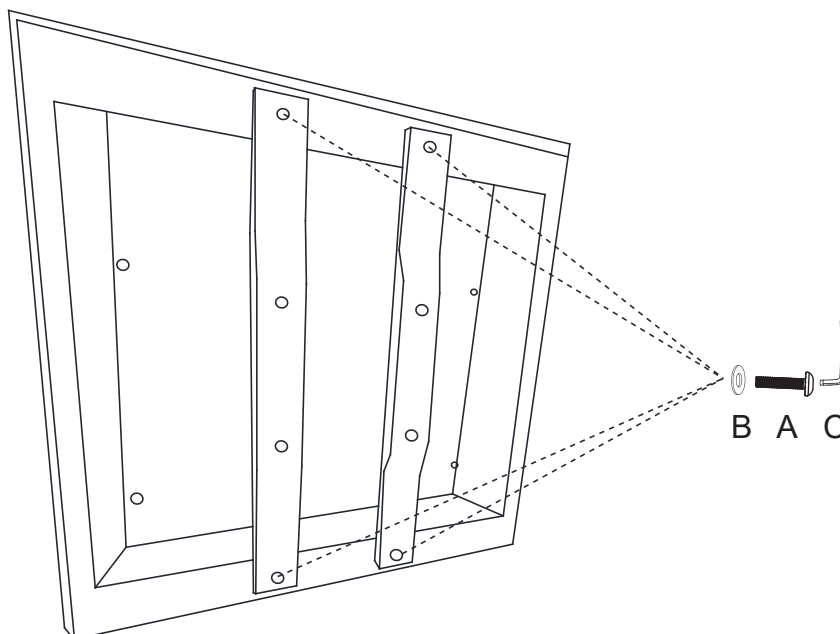


STEP 4:

Install the base under the seat frame and fasten it with Screws(A)


A		4PCS
C		1PC

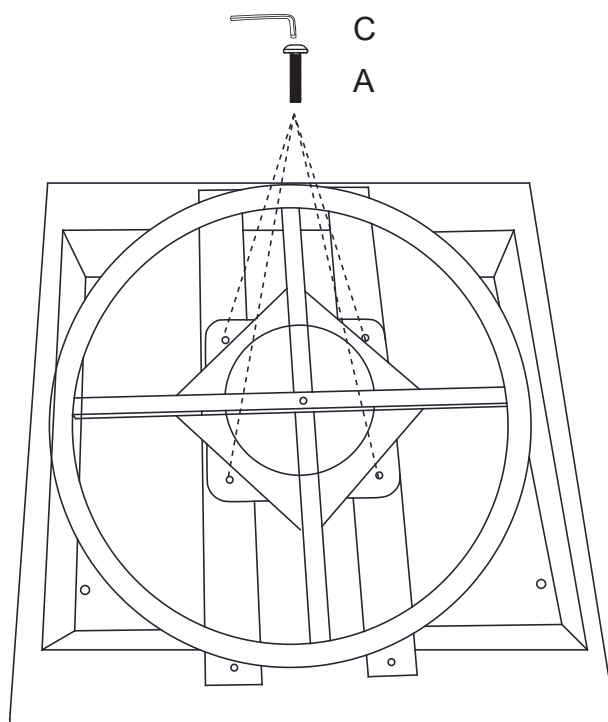

STEP 5: Fit the cover onto the seat frame, then secure the edges with Velcro.

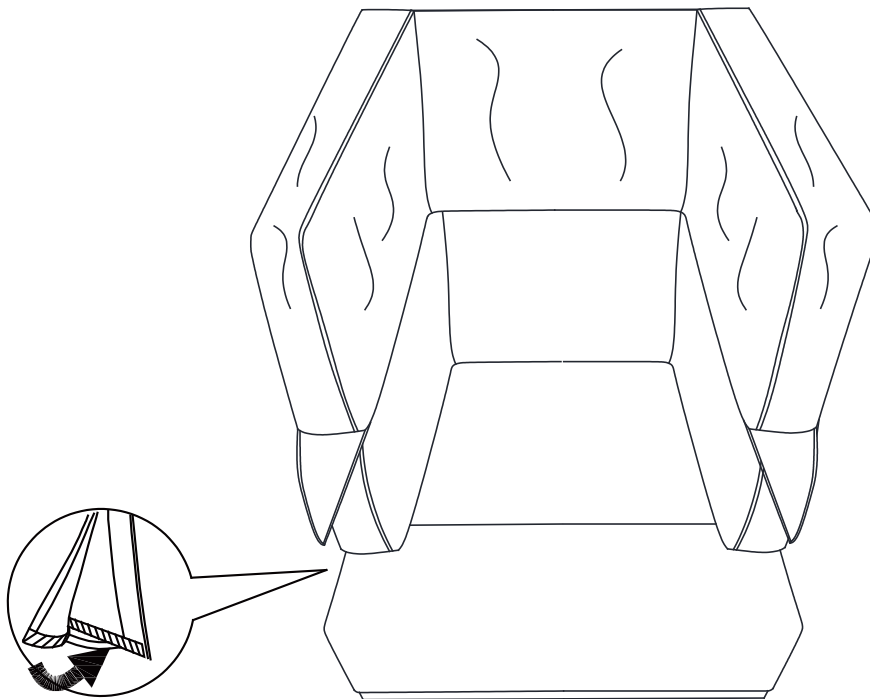

STEP 6: The cushion is packaged by vacuum compression. After cutting the package, it will rebound quickly within 4 hours. If the fabric has wrinkles it will basically disappear after standing for 72 hours.

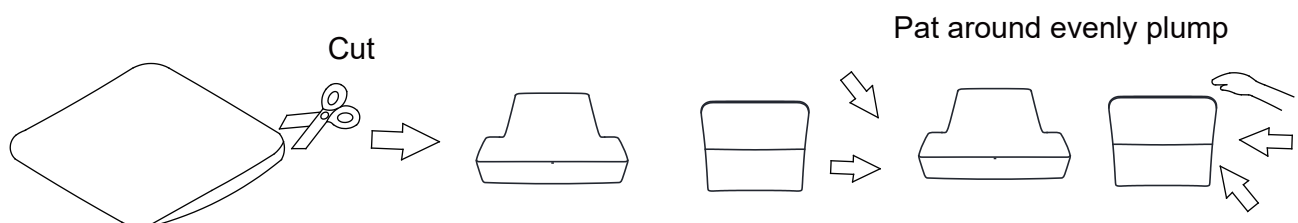

STEP 7:Place the backpack and cushion on the seat frame.

