


IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box. **Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.

INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided.
2. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

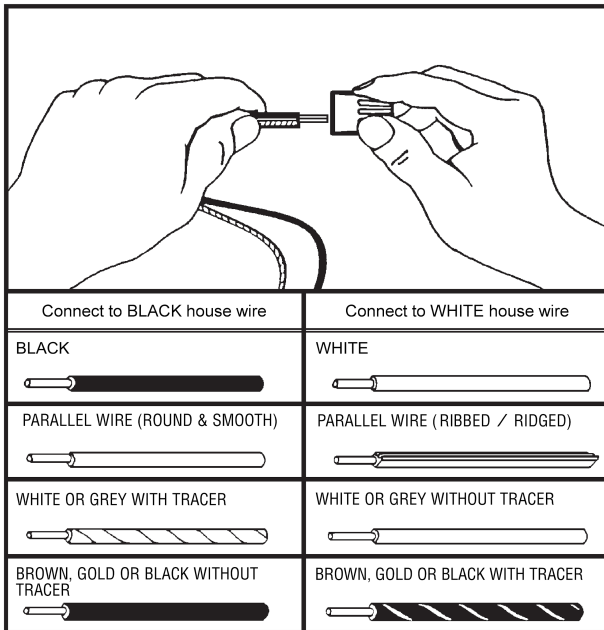

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

3. Place all wires and Wire Connectors (C) back into the junction box.
4. Place Canopy (D) against the ceiling and fasten it to Mounting Plate (A) using Canopy Screws (E) and Allen Wrench (F) provided.
5. Secure Shade (P) to Socket (G) with Ball Nuts (H).
6. Install light bulbs (not included) into Sockets (G).
7. Remove Finial (O), Hex Nut (N), one Metal Washer (M) and one Plastic Washer (L) and from Screw Stem (I), leaving behind extra Plastic Washer (L) and Metal Washer (M).
8. Thread Screw Stem (I) into the bottom of Coupling (J).
9. Place Diffuser (K) to Screw Stem (I), ensuring it is sitting flat on extra Plastic Washer (L). Secure Diffuser (K) in place with removed Plastic Washer (L), Metal Washer (M), Hex Nut (N) and Finial (O).
Note: If there is not enough space to safely secure Finial (O), unscrew Screw Stem (J) and adjust if necessary.

Enjoy your new fixture!

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape, Chain Pliers

