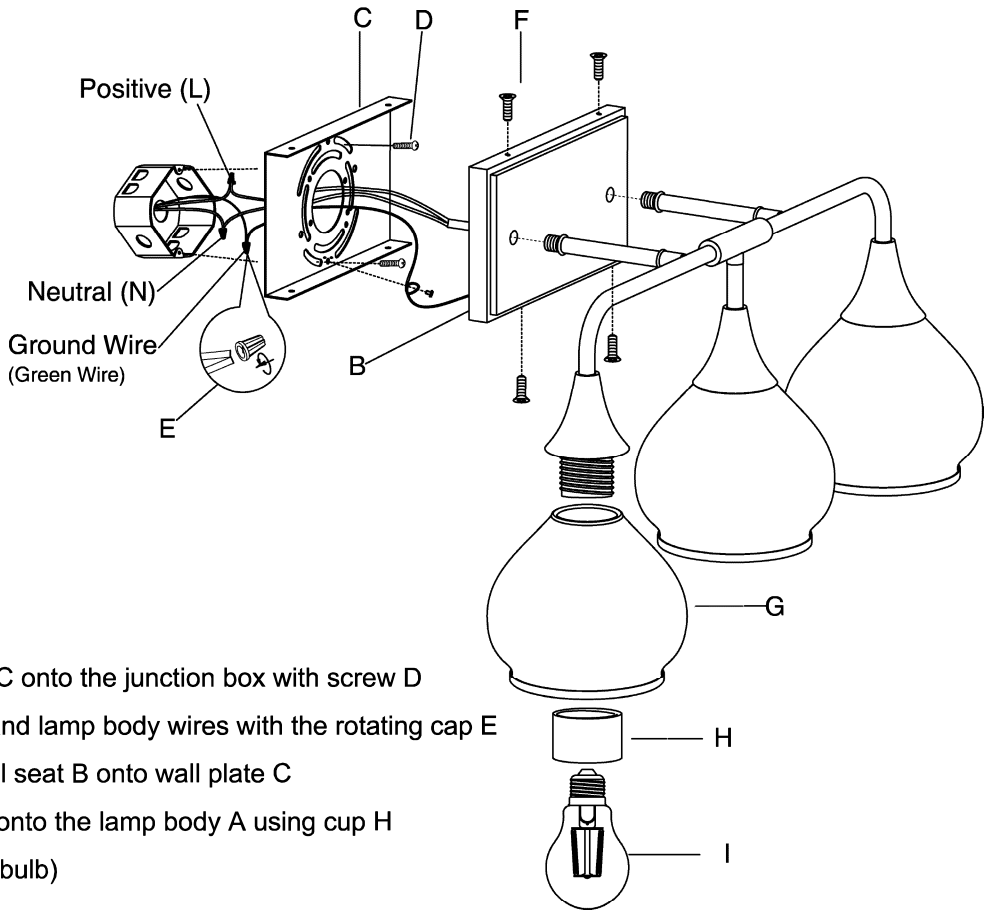


1: Lock the hanging plate C onto the junction box with screw D

2: Connect the main line and lamp body wires with the rotating cap E

3: Use screw F to lock wall seat B onto wall plate C

4: Lock the lampshade G onto the lamp body A using cup H

5: Install bulb I (excluding bulb)