


RAVELLO LOUNGE COLLECTION

THE MILANO

CYLINDRICAL LOUNGE HEATER

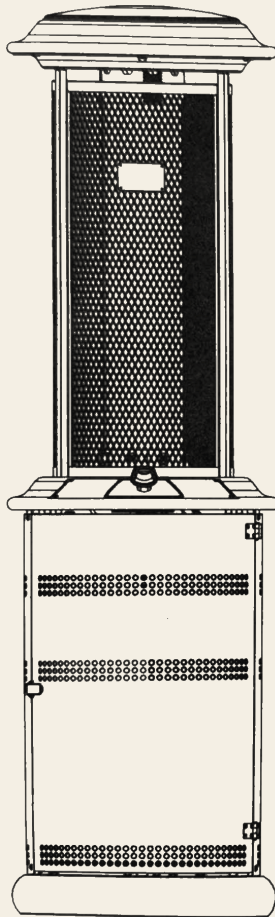

70.9" H × 22" W

Named for the capital of Italian design — a slim cylindrical column that pairs as readily with a club chair as with a hospitality lounge.

TRUBTU™ COMFORT ZONE ON A 50°F EVENING

68°

AT 2 FT

64°

AT 4 FT

60°

AT 6 FT

6 ft heat radius · approx. 113 sq ft of 360° warmth.
Measured air temperature at distance — our own standard, not a theoretical output figure.

FUEL

Liquid propane or natural gas
· bio-LP ready, no conversion needed

CONTROL

Electronic ignition with
manual Clima-Comfort at the control valve

RUN TIME

LP: up to approx. 10 hours per
concealed 20 lb cylinder

ARRIVES

Assembled or flat-pack · 70.9"
× 22" · 55 lb

FRAME

A seamless marine-grade 6061-T6 aluminum column around a 430-grade stainless emitter.

GLASS

A borosilicate glass tube carries the flame the full height of the column, removable for cleaning.

WARRANTY

Lifetime limited on frame and structure. Five years on parts and finish.

LINEAGE

The fixed-frame model of the Ravello Lounge collection. Specified worldwide since 2001.

THE MILANO


RAVELLO LOUNGE COLLECTION

TECHNICAL DATA

SPECIFICATIONS

MODEL	The Milano · LHI-MILANO
TRUBTU™ (50°F)	68° at 2 ft · 64° at 4 ft · 60° at 6 ft
HEAT RADIUS	6 ft, 360° · approx. 113 sq ft
CERTIFIED INPUT	36,000 BTU/hr
FUEL	Liquid propane (20 lb cylinder in the base) or natural gas, supplied with a 10 ft quick-connect hose · bio-LP compatible
RUN TIME	LP: up to approx. 10 hours per 20 lb cylinder · NG: continuous
CONTROL	Electronic ignition · manual Clima-Comfort at the control valve
BATTERIES	AA (igniter)
SIZE	70.9" H × 22" W · 55 lb
MATERIALS	430 stainless emitter · marine-grade 6061-T6 aluminum · borosilicate glass
CERTIFICATION	CSA certified · 500-hour ASTM B117 salt-spray tested
SAFETY	Anti-tilt switch · flame-failure device
GAS PRESSURE	NG 4–7 in WC · LP 11 in WC manifold · NG supply line ¾" ID minimum
APPLICATION	Outdoor use only · residential and commercial
SHIPS	Fully assembled, or flat-pack (about 40 minutes to assemble)
CARTON	22.5 × 22 × 51 in · 82.5 lb gross

CLEARANCES

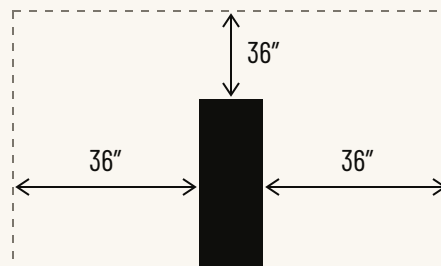

Minimum to combustibles. Under cover, no more than three side walls, with at least 30% of the perimeter permanently open.

WARRANTY

Frame and structure	Lifetime
Parts	5 years
Finish	5 years
Burner and glass	1 year
Hose and regulator	1 year

Limited, parts only. Residential and commercial on identical terms.

FINISHES

STOCKING

● Gunmetal

● Heritage Bronze

Colors shown are indicative.



940 W. Washington Blvd., Los Angeles, CA 90015
310-559-1700 · customerservice@lavaheat.com

LAVAHEAT.COM
SPECIFICATIONS SUBJECT TO CHANGE
LHI-MILANO · REV. OCT 2026 · 2 / 2