



Leaders in Reception Seating

Lesro Industries, Inc.
1 Griffin Road South
Bloomfield, CT
06002

Phone 860.243.3226
Fax 860.243.5392
www.lesro.com

Assembly Instructions

Amherst Wood and Lenox Steel Hip Chair Footrests

Tools required: Phillips screwdriver

Note: These instructions are intended for various models and configurations. Your chair may not look exactly as shown in the diagrams.

Recommendation: Retighten all screws on a seasonal basis to ensure your product remains strong and stable for many years of use.

Weight Capacity: 300 lbs. for Guest, 400 lbs. for Oversize

Parts List

Footrest Tube

1. Assemble chair completely according to separate chair instructions before attaching footrest.
2. Attach footrest tube to back surface of front legs using Phillips screws/bolts into pre-drilled holes, as shown in figures 1 and 2. Tighten securely using care not to strip.
3. Your hip chair is now assembled and ready to use.



Lenox Steel

Hardware


3/4" Phillips Bolts, 4 pcs.



Amherst Wood

Hardware

1" Phillips Screws, 4 pcs.

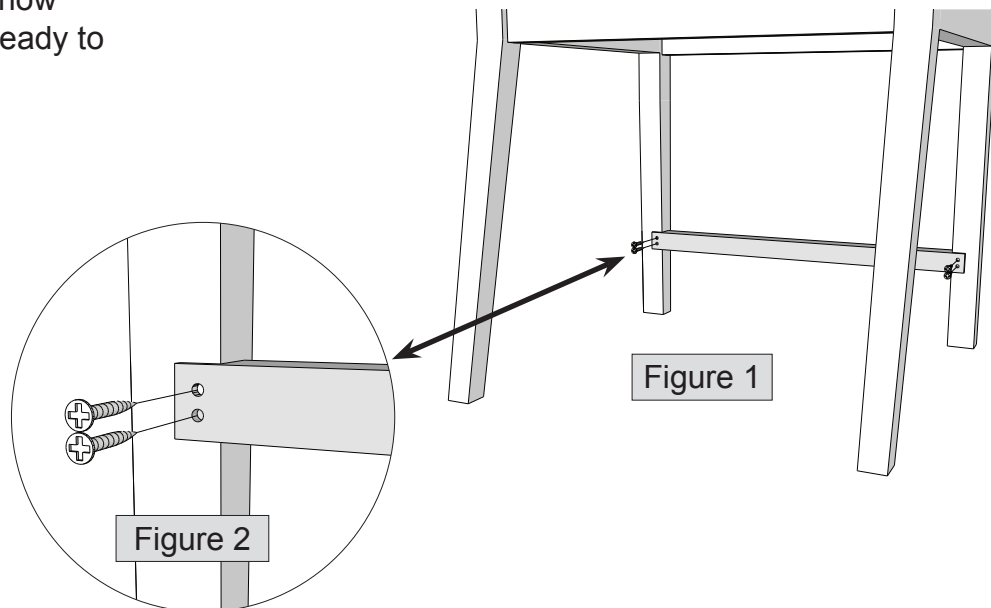

Thank you for purchasing a Lesro product.
Need assistance with assembly? Call Lesro customer service 1-800-275-7545.
Visit us on-line at www.lesro.com