


Assembly Instructions

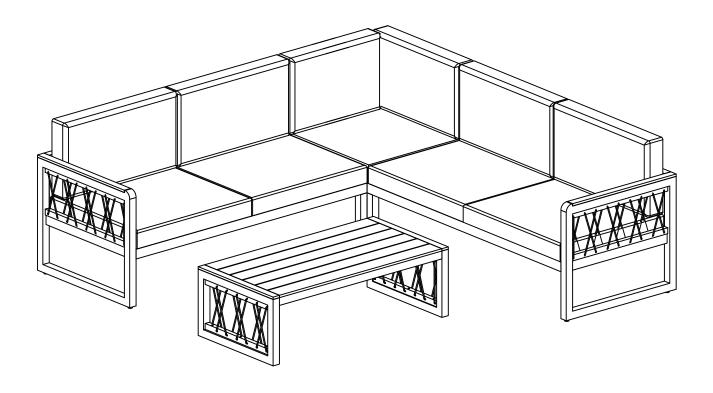

Please visit our website for the most current instructions, assembly tips, report damage, or request parts.

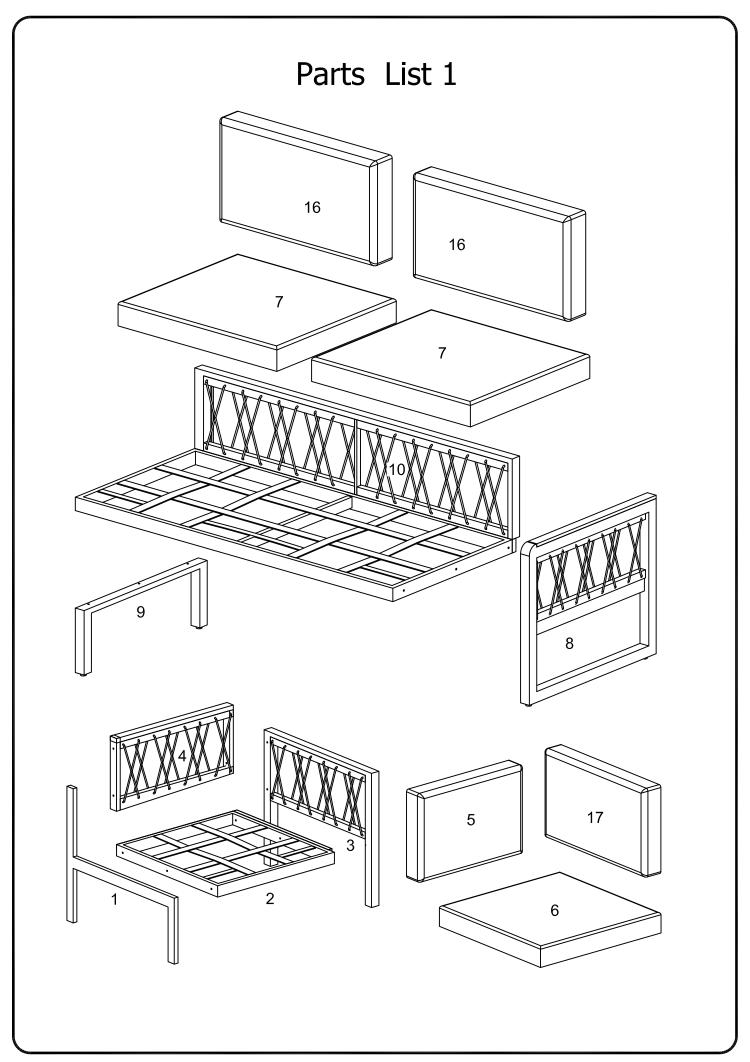

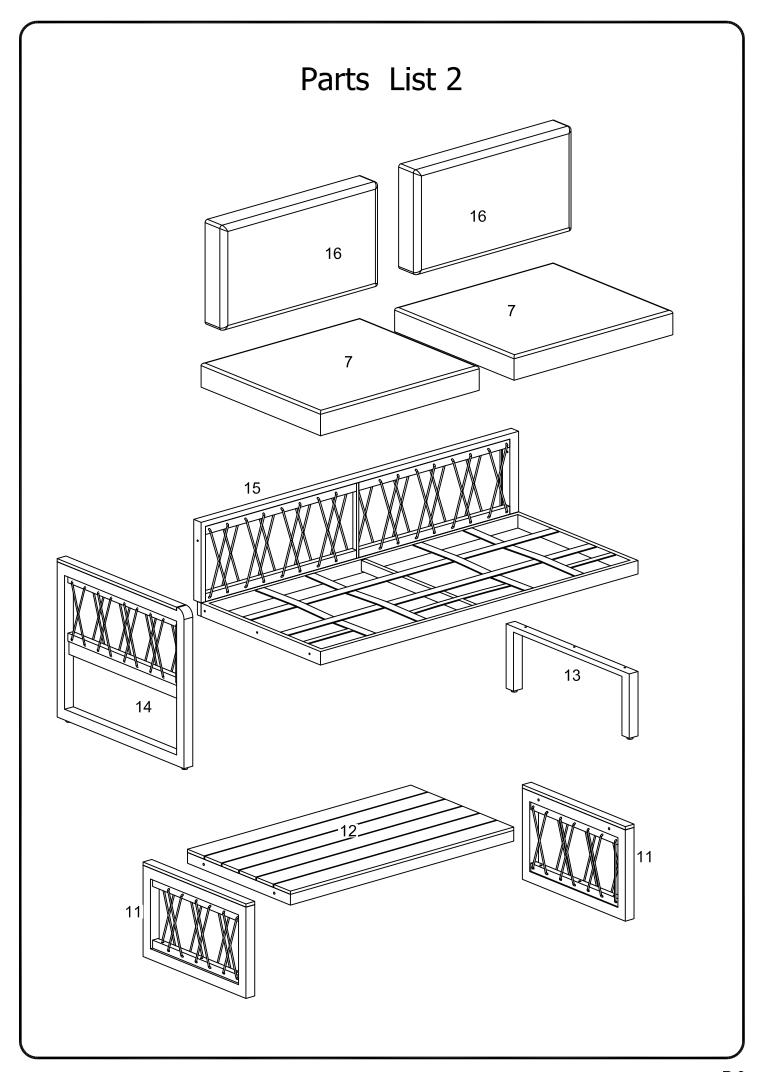


Hardware List

M6*35 Bolt 28 pcs Α Ø30 Washer В 28 pcs С Wrench рс D (big) U shape buckle рс U shape buckle Ε рс


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

Step 1

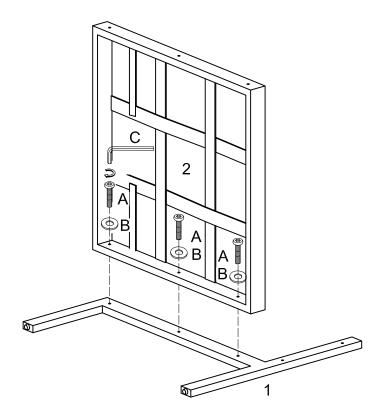


Use wrench (C), bolt (A), washer (B) to secure the seat frame (2) to the side frame (1).

Step 2

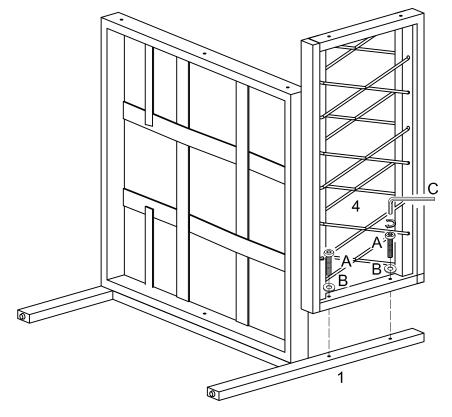


Use wrench (C), bolt (A), washer (B) to secure the back frame (4) to the side frame (1).



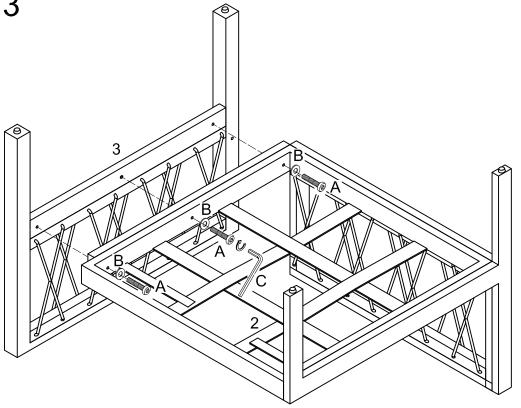


Use wrench (C), bolt (A), washer (B) to secure the seat frame (2) to the side frame (3).

Step 4

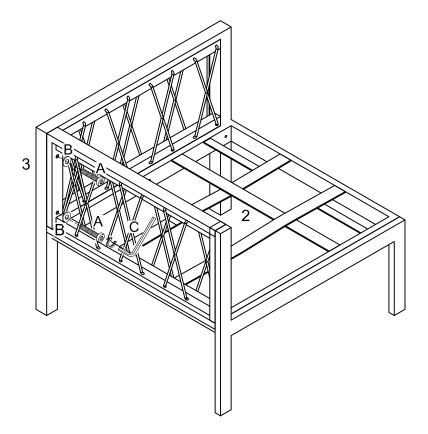


Use wrench (C), bolt (A), washer (B) to secure the back frame (4) to the side frame (3).




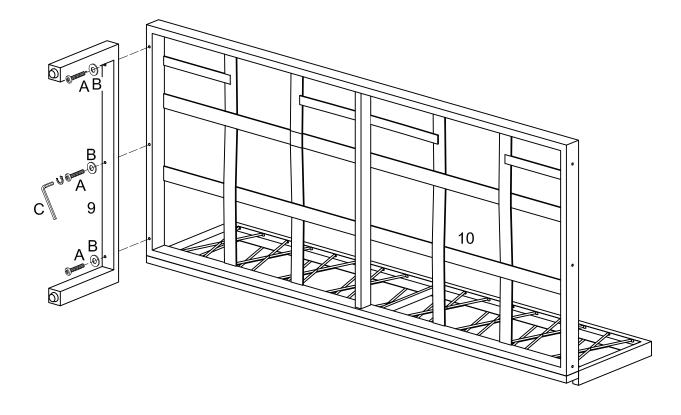


Use wrench (C), bolt (A), washer (B) to secure the leg (9) to the seat frame (10).

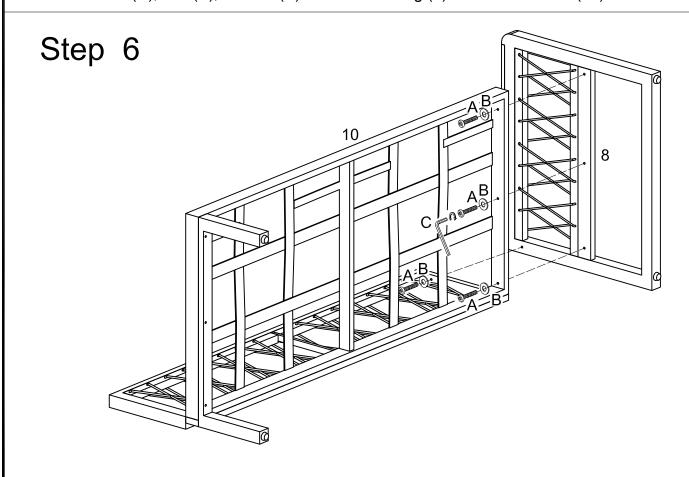


Use wrench (C), bolt (A), washer (B) to secure the seat frame (10) to the side frame (8).

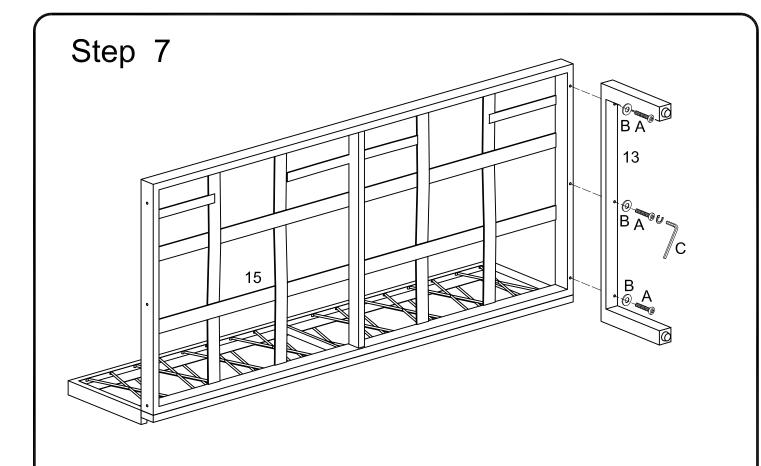

Use wrench (C), bolt (A), washer (B) to secure the leg (13) to the seat frame (15).

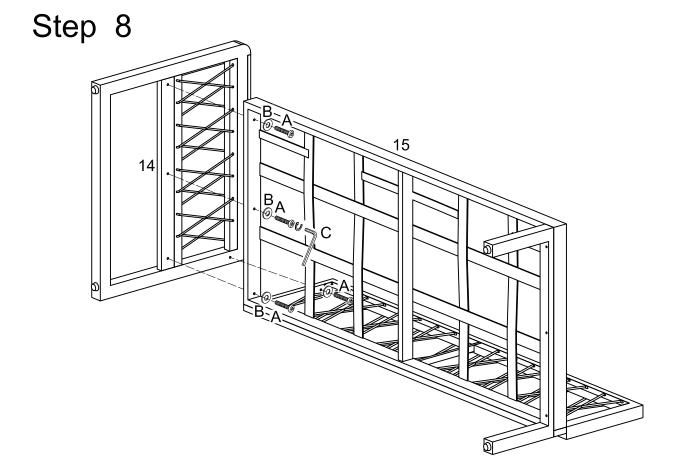


Use wrench (C), bolt (A), washer (B) to secure the seat frame (15) to the side frame (14).

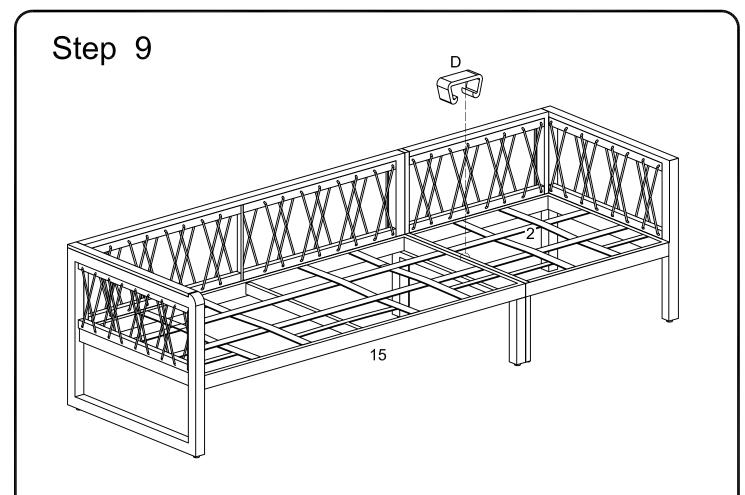



Place the (big) U shape buckle (D) to connect with the seat frame(15,2)

Step 10

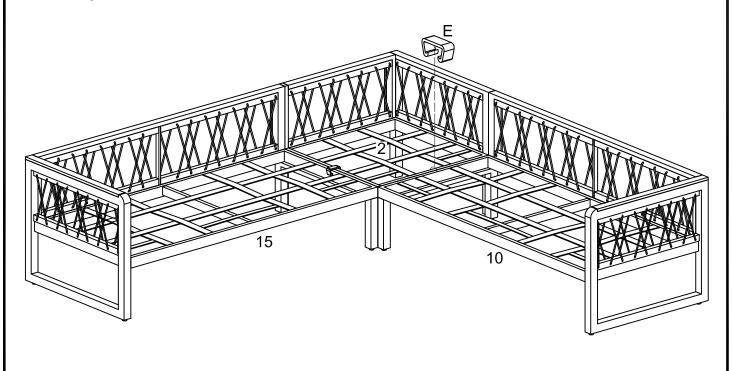


Place the U shape buckle (E) to connect with the seat frame(2,10)

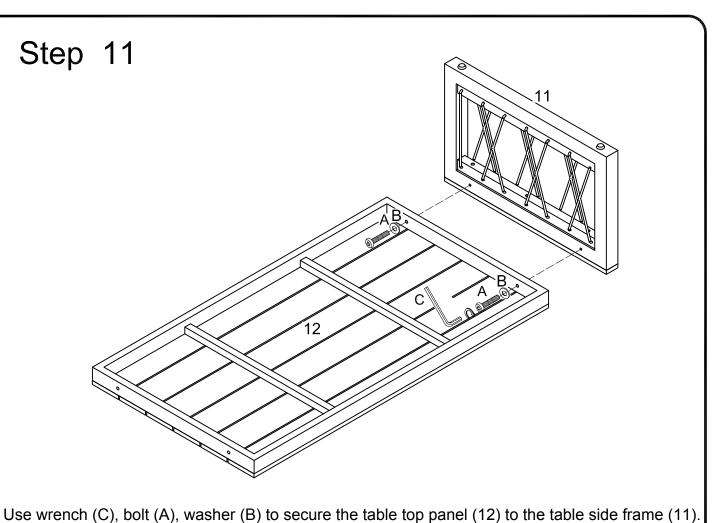

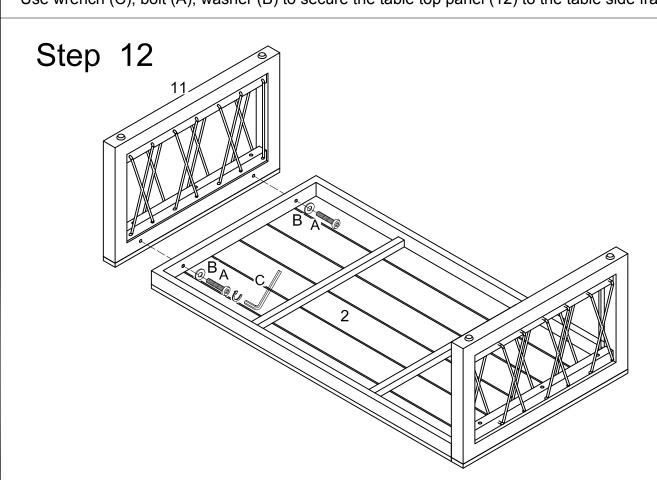

Use wrench (C), bolt (A), washer (B) to secure the table top panel (12) to the table side frame (11).

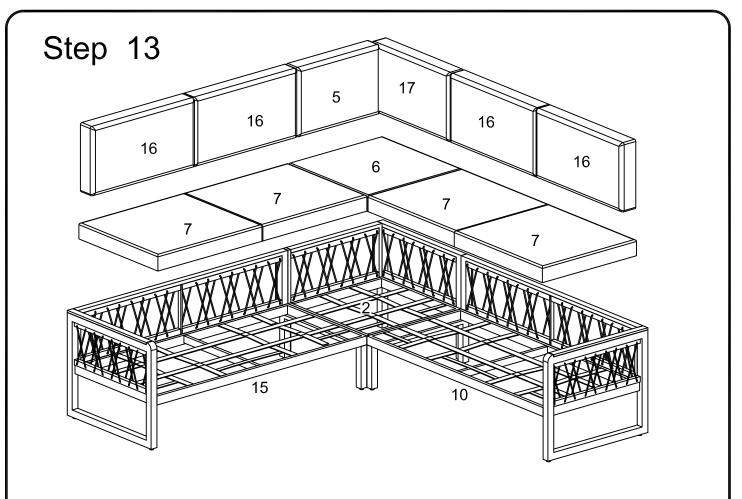

Place the cushion (5,6,7,16,17) on top of the seat frame (15,2,10) as per diagram.

