



Shift® Ellipse | K-10257

Multifunction 2.5 gpm handshower with Black handle

Features

- Multifunction handshower offers wide coverage and concentrated spray settings
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate



Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.

OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
OBC

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)

Flow:

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories

- K-8593 72" metal shower hose
- K-9660 Vacuum breaker, 1/2" x 1/2"

or

- K-9514 60" metal shower hose
- K-9660 Vacuum breaker, 1/2" x 1/2"

or


- K-45981 72" ribbon hose
- K-9660 Vacuum breaker, 1/2" x 1/2"

or

- K-45982 60" ribbon hose
- K-9660 Vacuum breaker, 1/2" x 1/2"



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 20:20 - US-CA

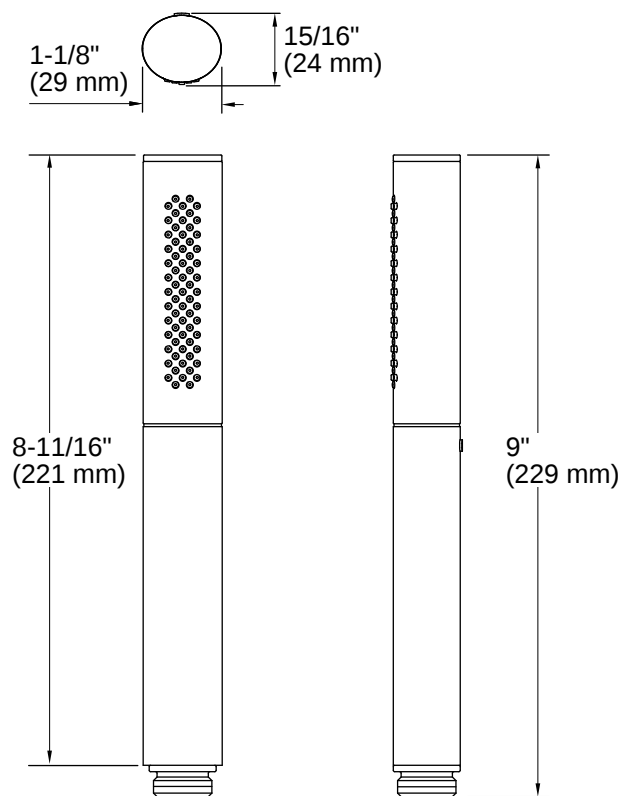

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.
NOTE: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.

