outline drawing:

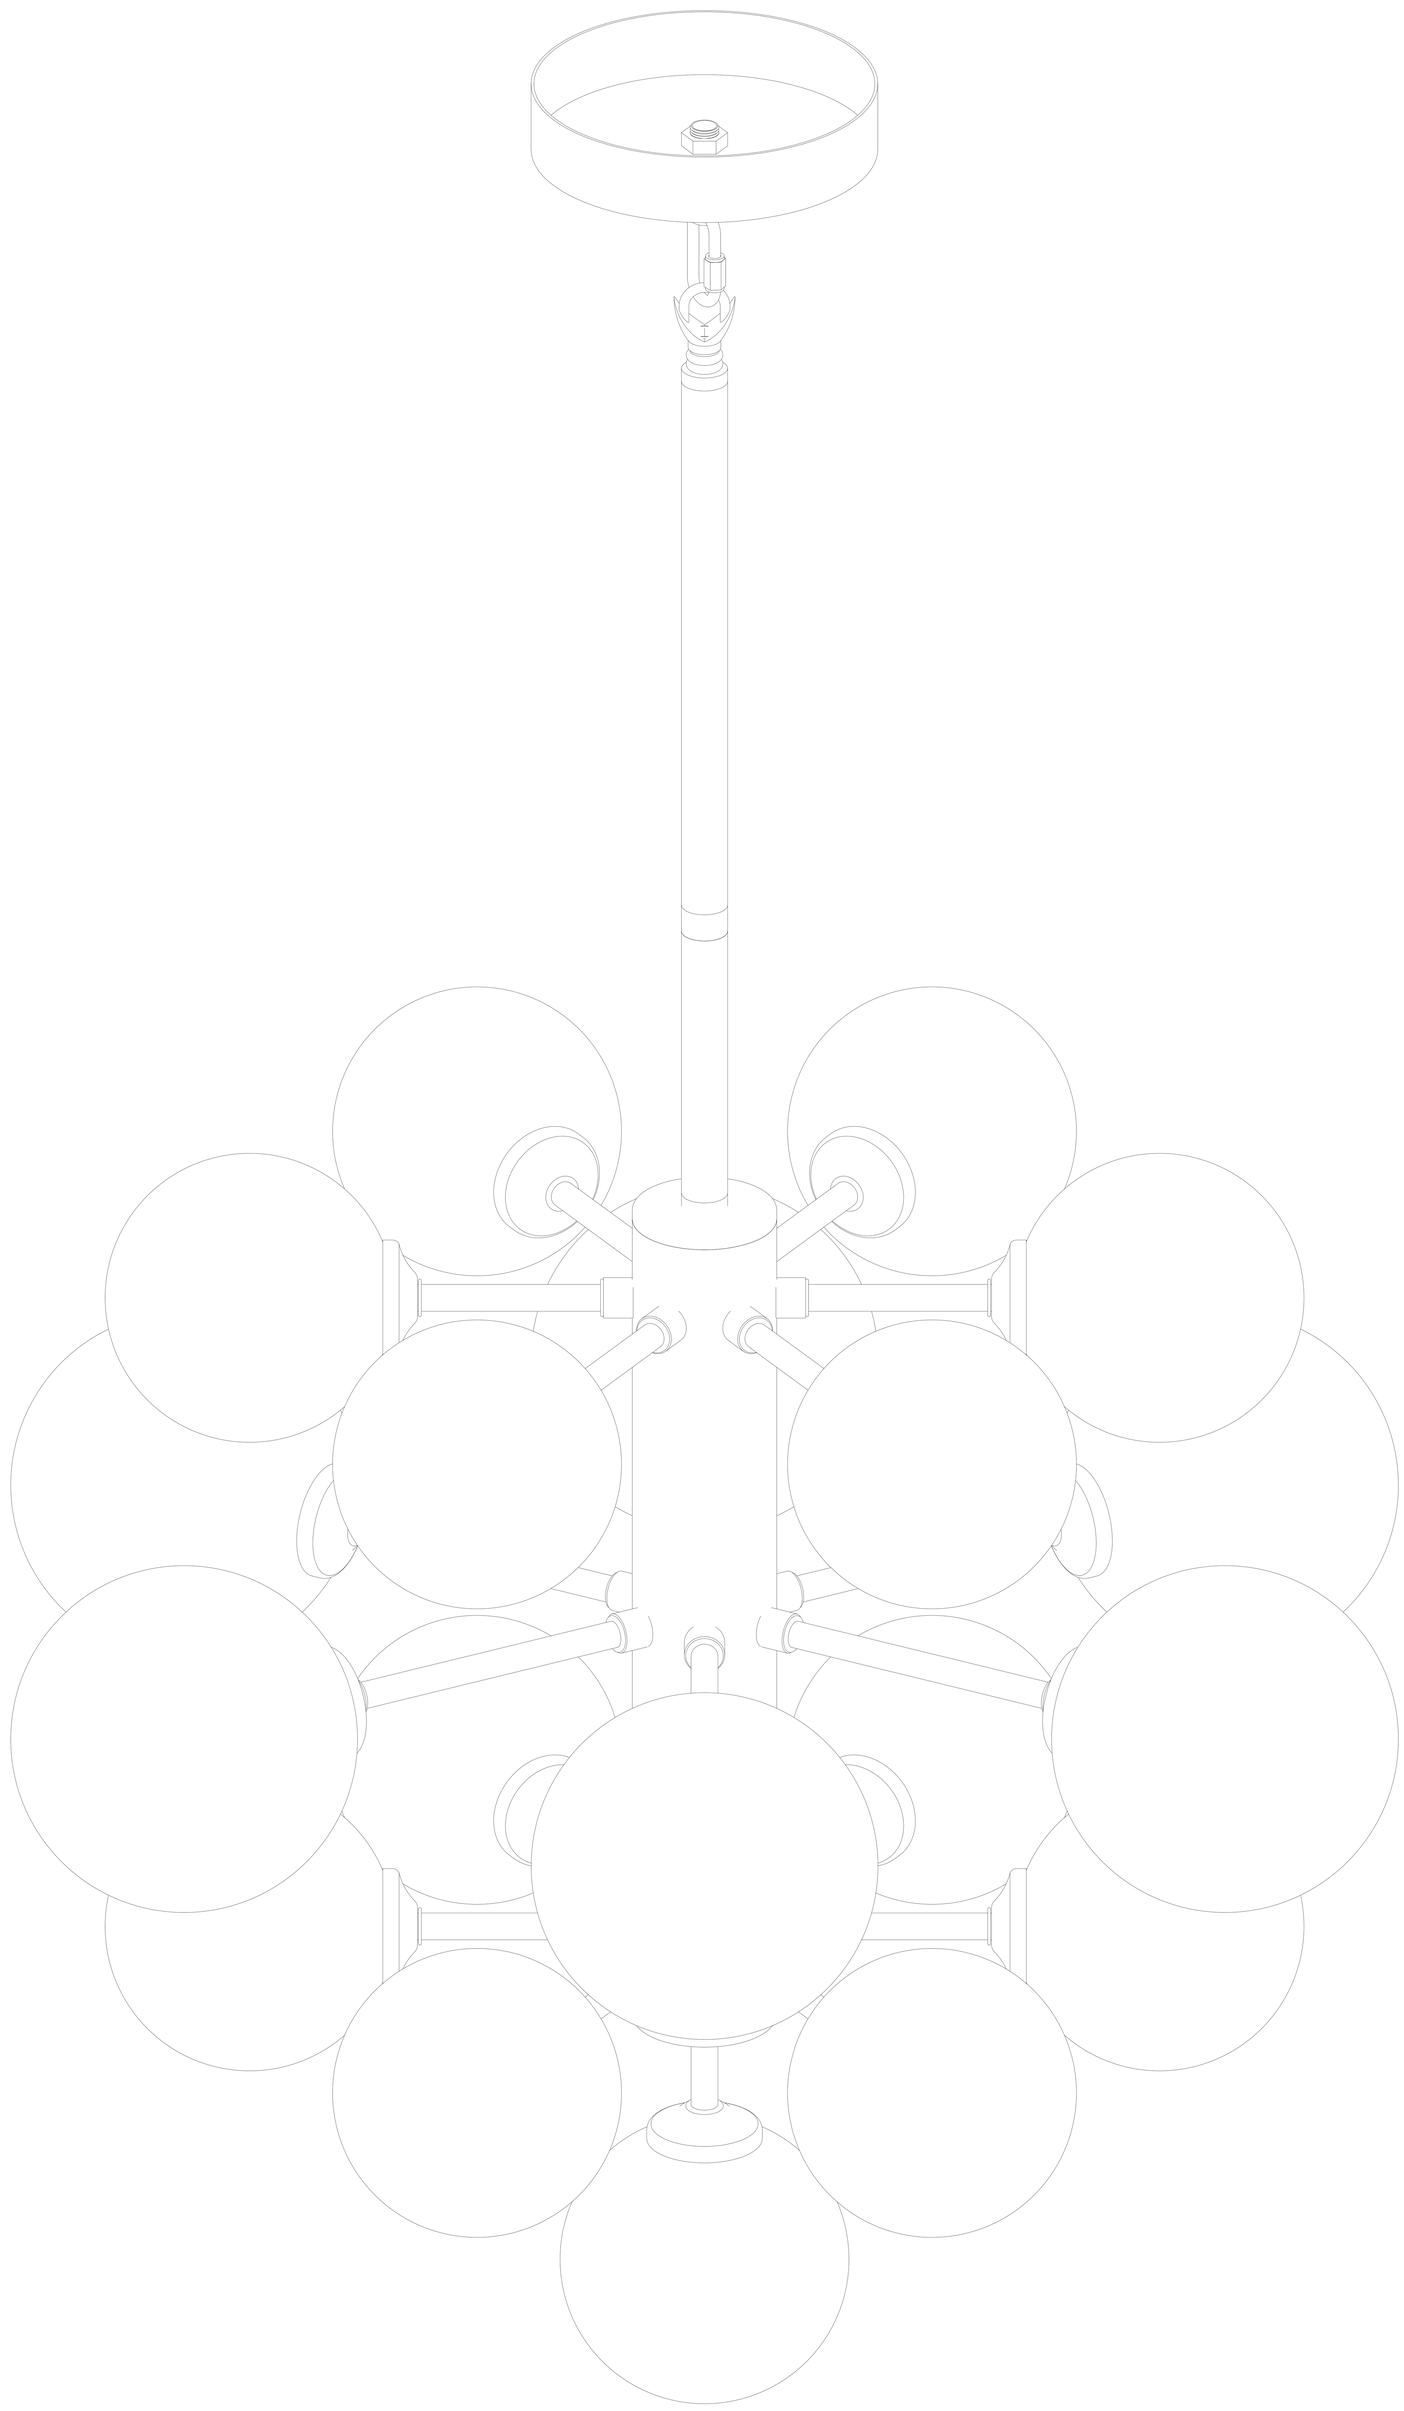

model:

Technical data: Power supply voltage 110-120V, bulb type G9Max7Wx19PCS (not included)

CAUTION

- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation。If the wires are defective, do not attempt installation 。
- In some countries, electrical installation work can only be carried out by authorized electrical contractors。Please contact the local power department for advice。



IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit。

IMPORTANT Keep children away from the installation process 。

Required tools (not included):



Ladder



Phillips screwdriver

pincers

Required tools (including):

Hex Wrench

glove

The hardware kit provides:

Installation board

mounting screw

Hanging plate screws

CONNECTORS



tray

Large and Medium Pipe-B

Large and Medium Pipe-A

Connector

Short connector

Large and Medium Pipe-C

Closed loop

Toothed Glass Balls -13PCS

Toothed large glass ball -6PCS



light stand

cable tie



Gecko rubber stopper



Self tapping screws

- The components displayed on each lamp may vary slightly

Step 1

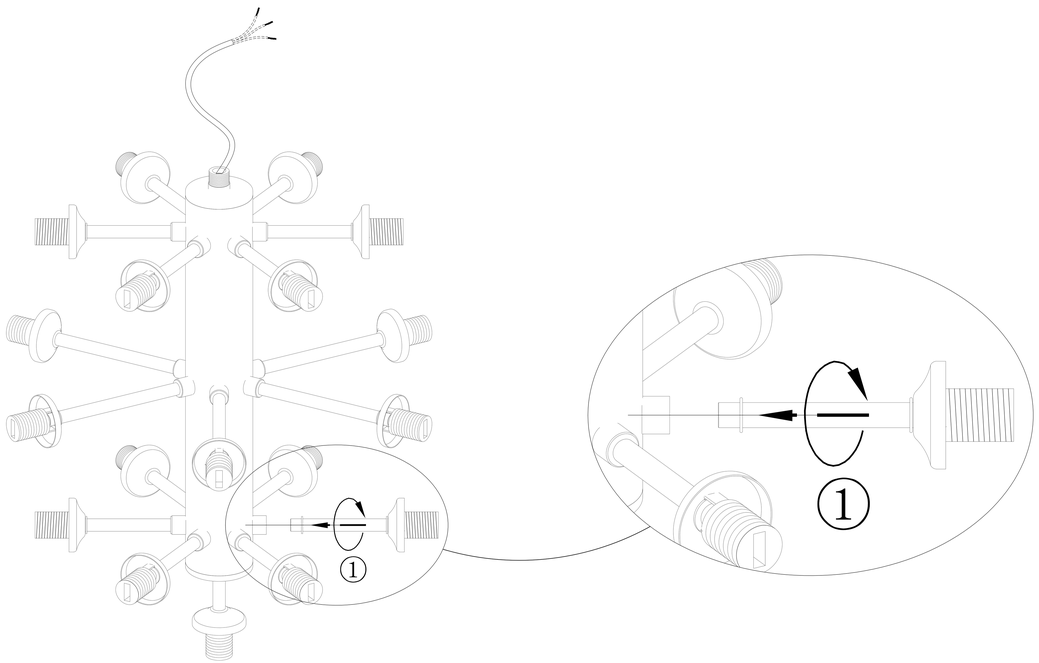

① Tighten the teeth on the lamp head tube and water tube。

Step 2

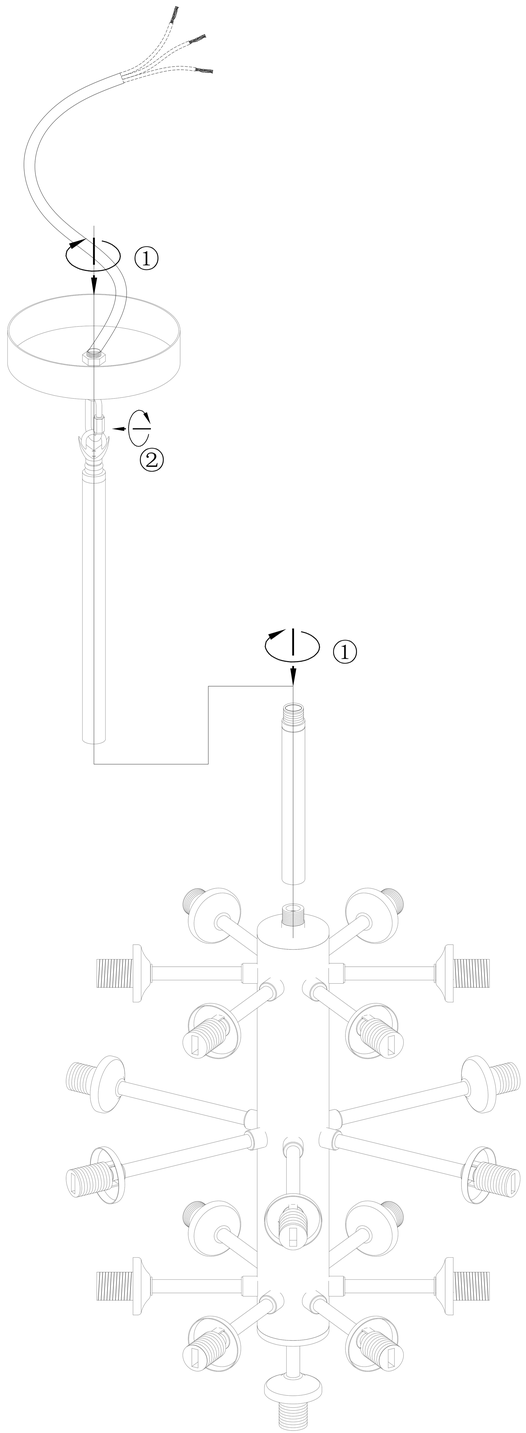

① Tighten the connections of large and medium-sized pipe-A, large and medium-sized pipe-B, large and medium-sized pipe-C, connectors, universal heads, and discs。

② Lock the safety of the vertical hook securely。

Step 3

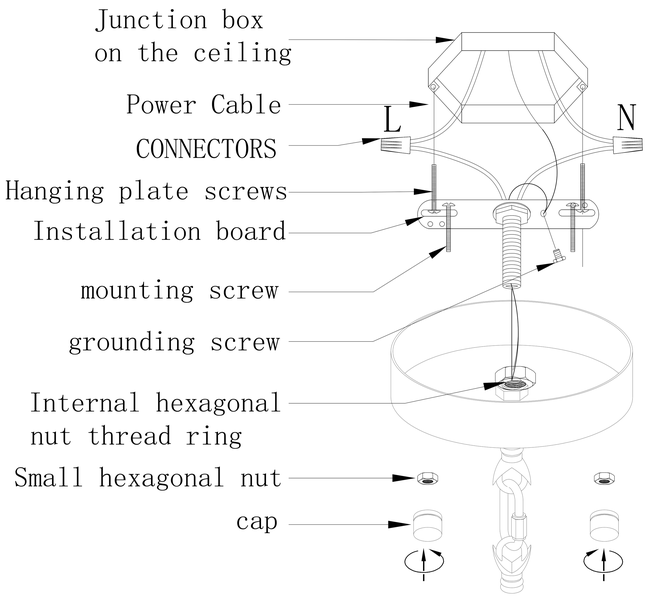

① Thread all the wires through the canopy and installation kit。

② Connect the power cable with two cable connectors。

③ Connect the grounding wire and tighten it with the grounding screw。

④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws。

⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut。

⑥ Tighten the fixing screws on the rain shelter holes。

⑦ Tighten the cap tightly。

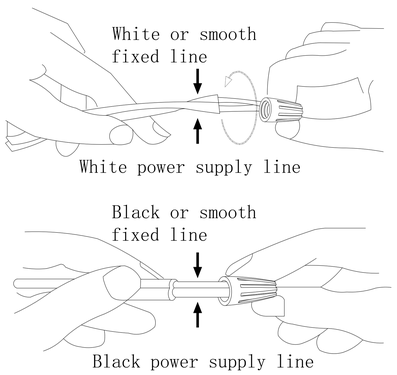

Connect the black or red wire (with an L sticker on the wire) to:	Connect the white wire (with N stickers on the wire) to:
black	white
Parallel lines - pti&l (circular and smooth)	Parallel lines - spri&l (square and ridge shaped)
Transparent, brown, gold or black (without tracer)	Transparent, brown, gold or black (with tracer)
Copper core insulated wire (excluding GREEN)	Silver conductor insulated wire (excluding GREEN)



Step 4

Kind reminder:Before installing the lampshade, please clean it thoroughly 。

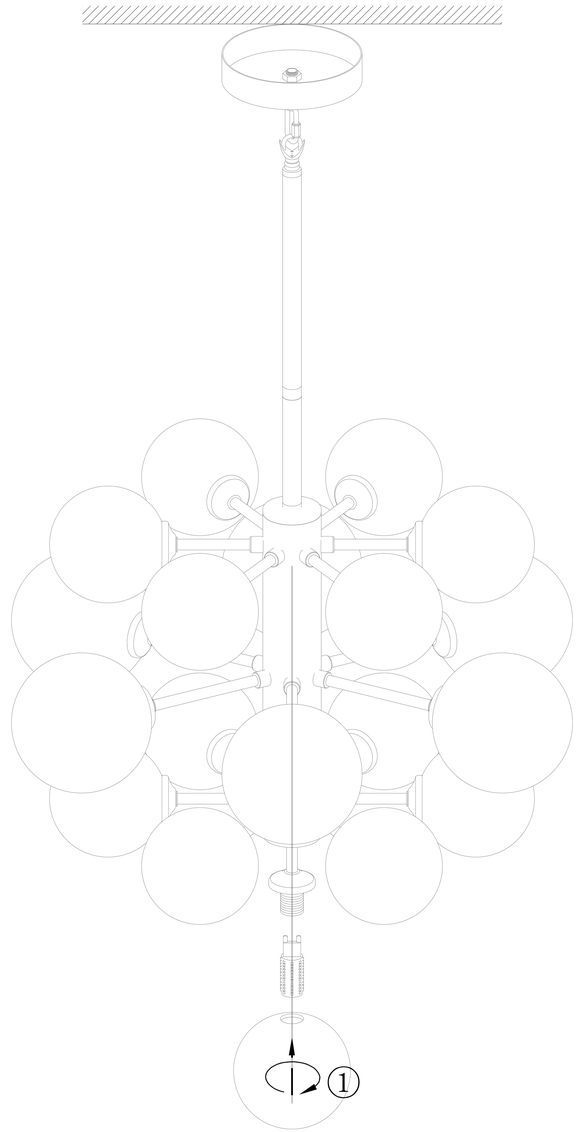

① Insert the G9 bulb into the lamp head and tighten the lampshade onto the lamp head (G9 maximum 7W, not included)。