

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED



Fixture



Stem and Hex Nut



Glass Panel



Rubber Ring




Washer



Cap



Ball Nut B



Mounting Unit



Ball Nuts A




Mounting Screws



Wire Nuts

* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

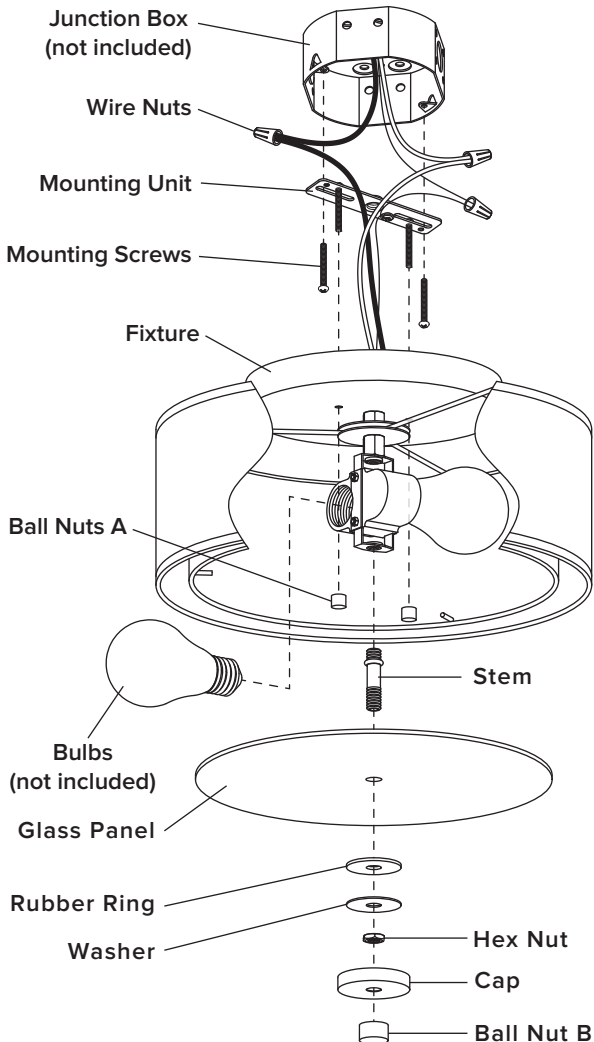

INSTALLATION



STEP 1

Unscrew the **ball nuts A** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

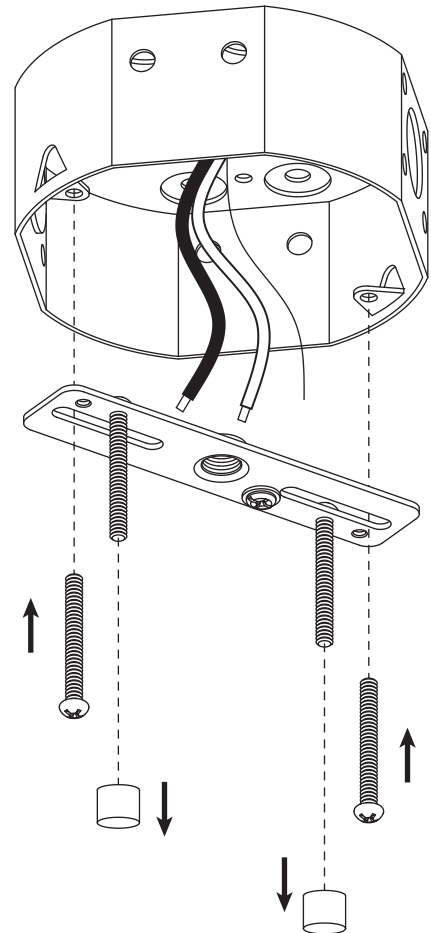


STEP 2

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

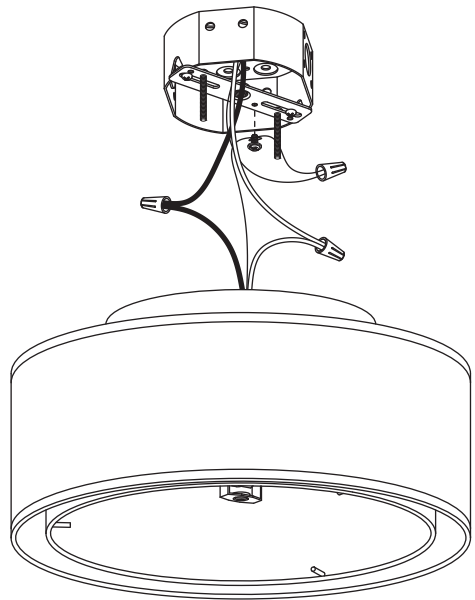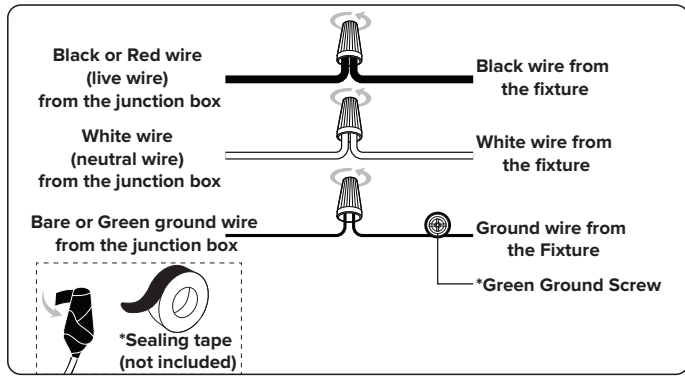


STEP 3

Attach the **fixture** to the **mounting unit** through screws holes as shown, and secure it with **ball nuts A**.

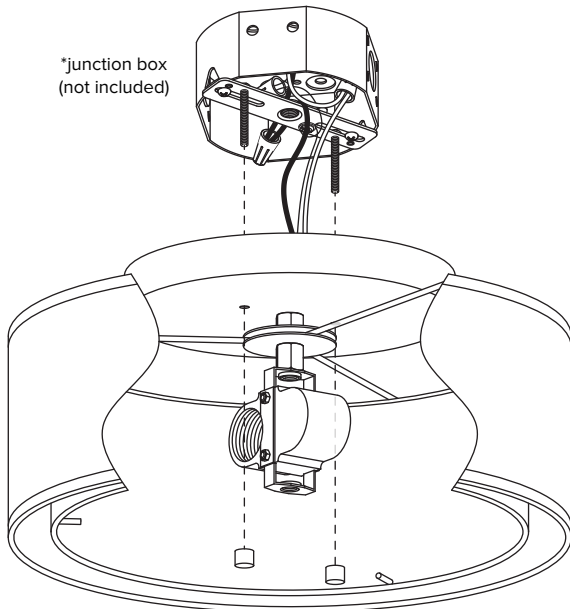



STEP 4

Screw the **stem and hex nut** into the **fixture**.

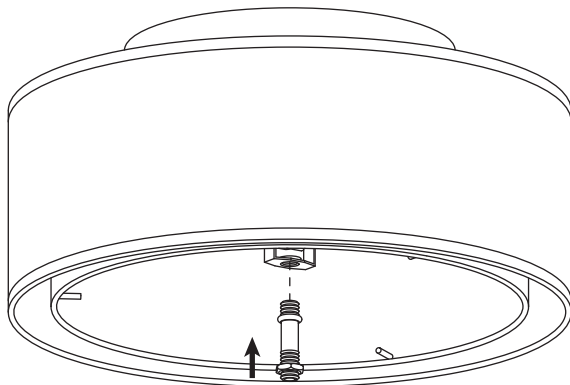

STEP 5

Install bulbs (not included)

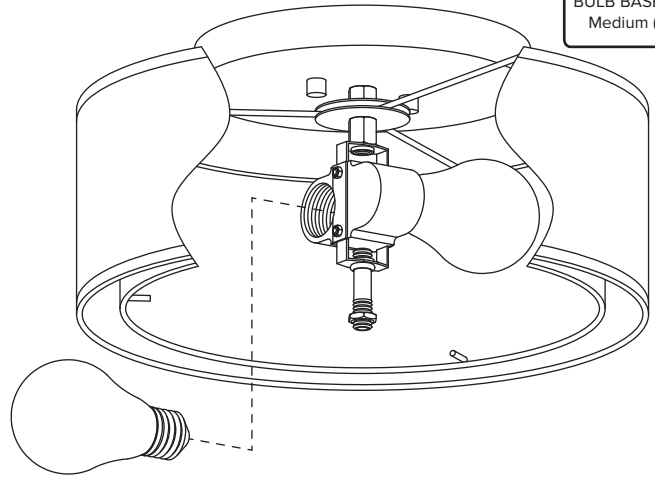

STEP 6

1. Remove the **hex nut** from the **stem**.
2. Place the **glass panel**, **rubber ring**, and **washer** onto the **threaded pipe**, then secure with **hex nut**.
3. Place the **cap** onto the **threaded pipe**, tighten with **ball nut B**.

