

## LED-SR6P

## VELOCE LED RECESS DOWN LIGHT SERIES

LED New Construction and Remodel • Wet Location • Dimmable •



### Specifications:

#### Description:

The slim downlight delivers a solution for fast recess mount application for both residential and commercial applications. In addition, it is wet location rated and is a cost effective solution for fire rated application. It provides a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits to make ceiling even flat and also can be replaced aftermarket recess can.

#### Features:

Diffused polycarbonate lens controls direct glare from the LEDs  
Aluminum construction  
Super thin  
No junction box needed  
IC-Rated (Suitable for direct contact with insulation)

#### Performance:

Input Power	15W
Input Voltage	120V
Input Frequency	60Hz
Lumens	860
CCT	3000K
CRI	90
LPW	57
Life Hour	35,000 hrs-50,000 hrs
Warranty	3 years Limited
Listing	cETLus Classified. Wet Location Energy Star qualified

#### Catalog Number:

Base	Finish	Color Temp.	CRI	Voltage
LED -SR6P/WT	White	3000K	90	120V
LED -SR6P/BZ	Bronze	3000K	90	120V
LED -SR6P/BN	Brushed Nickel	3000K	90	120V

#### Image:



White




Bronze



Brushed Nickel

#### Included Mounting Option:

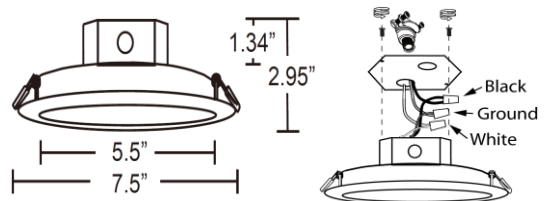

#### ELECTRICAL DATA:

Input Voltage	120V
Input Frequency	60Hz
Power Factor	≥0.90
Temperature	-25°C to 40°C
Dimming	Yes
Dimming Model	Leviton# 6672, Leviton# 6633



**Amax Lighting, Inc.**

10268 Santa Fe Springs Road,  
Santa Fe Springs, CA 90670  
[www.amaxlighting.com](http://www.amaxlighting.com)

Toll Free:(888) 945-5221  
Tel: (562) 945-5221  
Fax: (562) 464-1664