

ASSEMBLY INSTRUCTION




friendly reminder

To ensure a smooth, confusion-free installation, please:

Avoid opening all hardware bags at once, as some screws look alike.

Verify each bag's hardware with the parts list before assembling.


Open bags only when needed for each step.

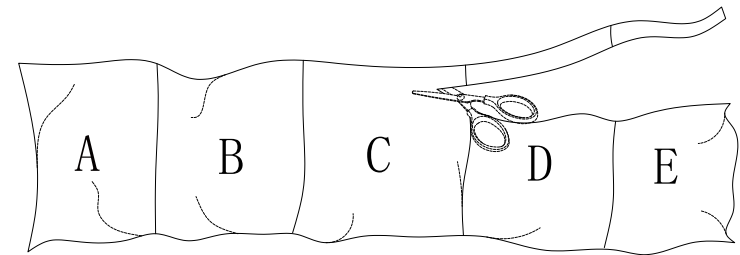

Ax1	Bx1	Cx1	Dx1	Ex1	Fx4+1	Gx4+1	Hx1	Ix4+1	Jx4+1	Kx4+1	Lx4+1	Mx1


If you need any help during assembly, please contact us
Sharing a video and a brief description of where you're stuck will help us assist you better.

1

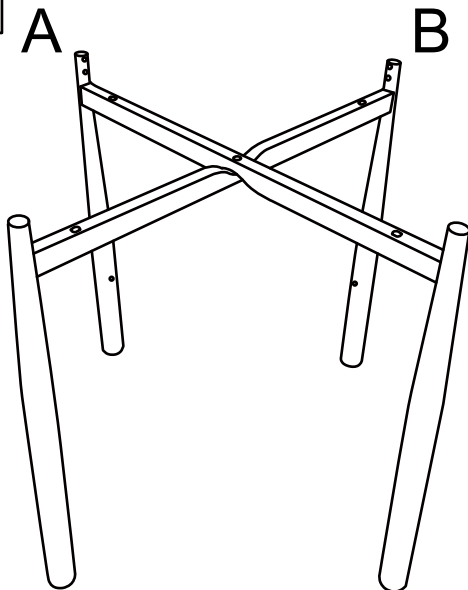

Place (A) onto (B).

2

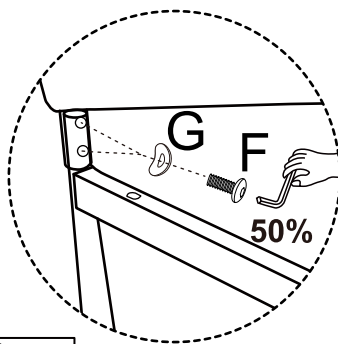

Gx4



M6x16x1.5mm


Fx4



M6x13mm

Insert (D) into (A) and (B).
Twist (F) through (G) into (A), (B), and (D) to secure them.
Note: Do not fully tighten (F); tighten to about 50% only.

3

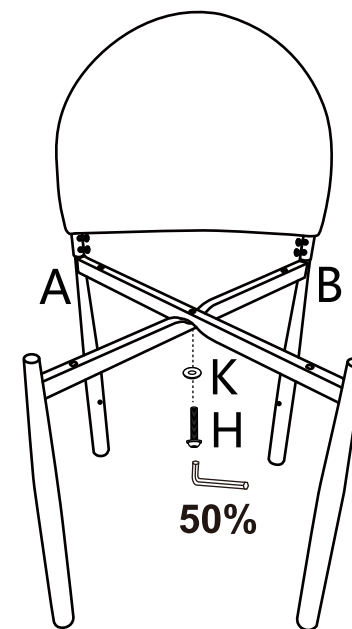

Kx1



M6x16x1.5mm


Hx1



M6x30mm

Twist (H) through (K) into (A) and (B).
Note: Tighten (H) to about 50% only.

4

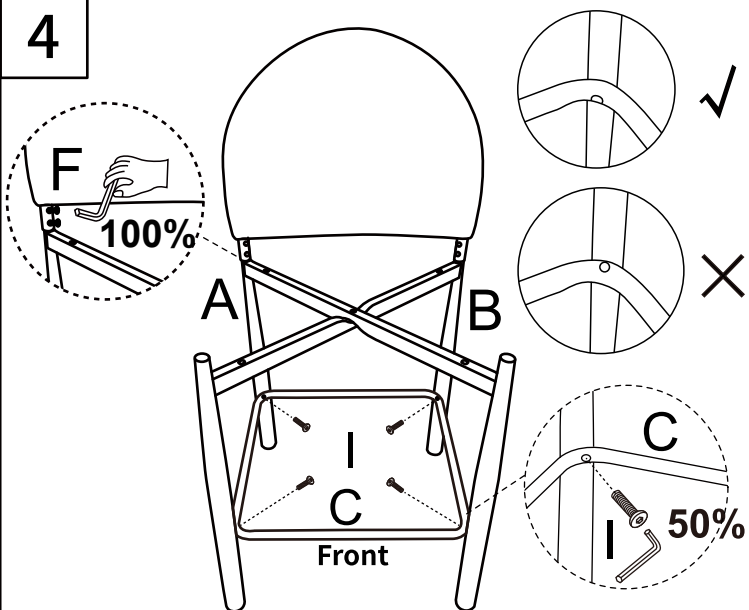

Front


I x4



M6x30mm

Place the side labeled "Front" facing down.
Twist (I) through (C) into (A) and (B).
Note: Tighten (I) to about 50% only.
Then tighten (F) completely.

5

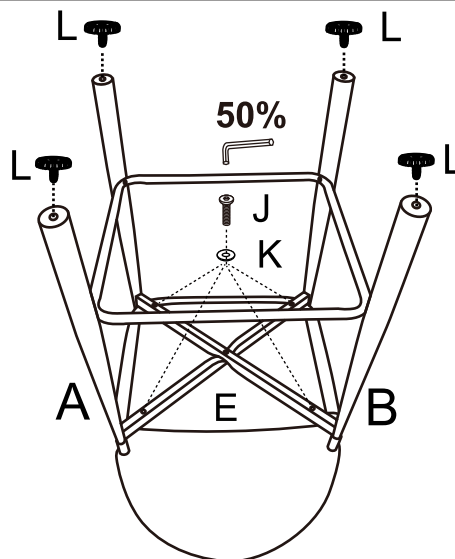

Lx4



Kx4



M6x16x1.5mm

Jx4




M6x50mm

Insert (E) firmly into the base frame, adjusting it to align the bottom holes.

Twist (J) through (K) into (A) (B) and the seat cushion (E) to connect them.

Note: Do not fully tighten the first three (J), tighten to about 50% only. After installing the last (J), fully tighten all previously installed screws. As shown, twist (L) into (A) and (B).

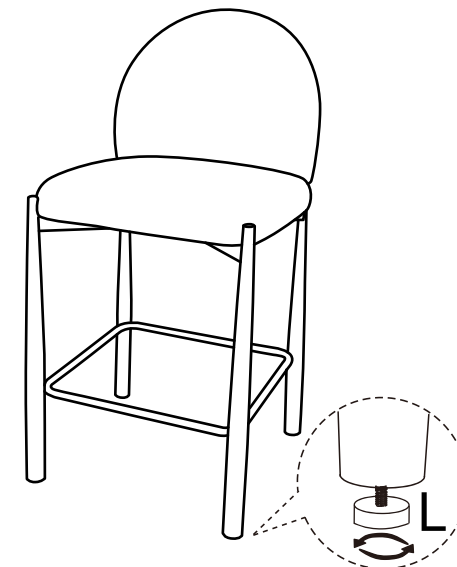

Assembly complete!

If you feel that the chair is leaning to one side due to uneven ground, rotate the foot pads to adjust it.