
Installation Manual


Any question please contact us:
support@jubest.com

XKCD1P-72x80IN+HD

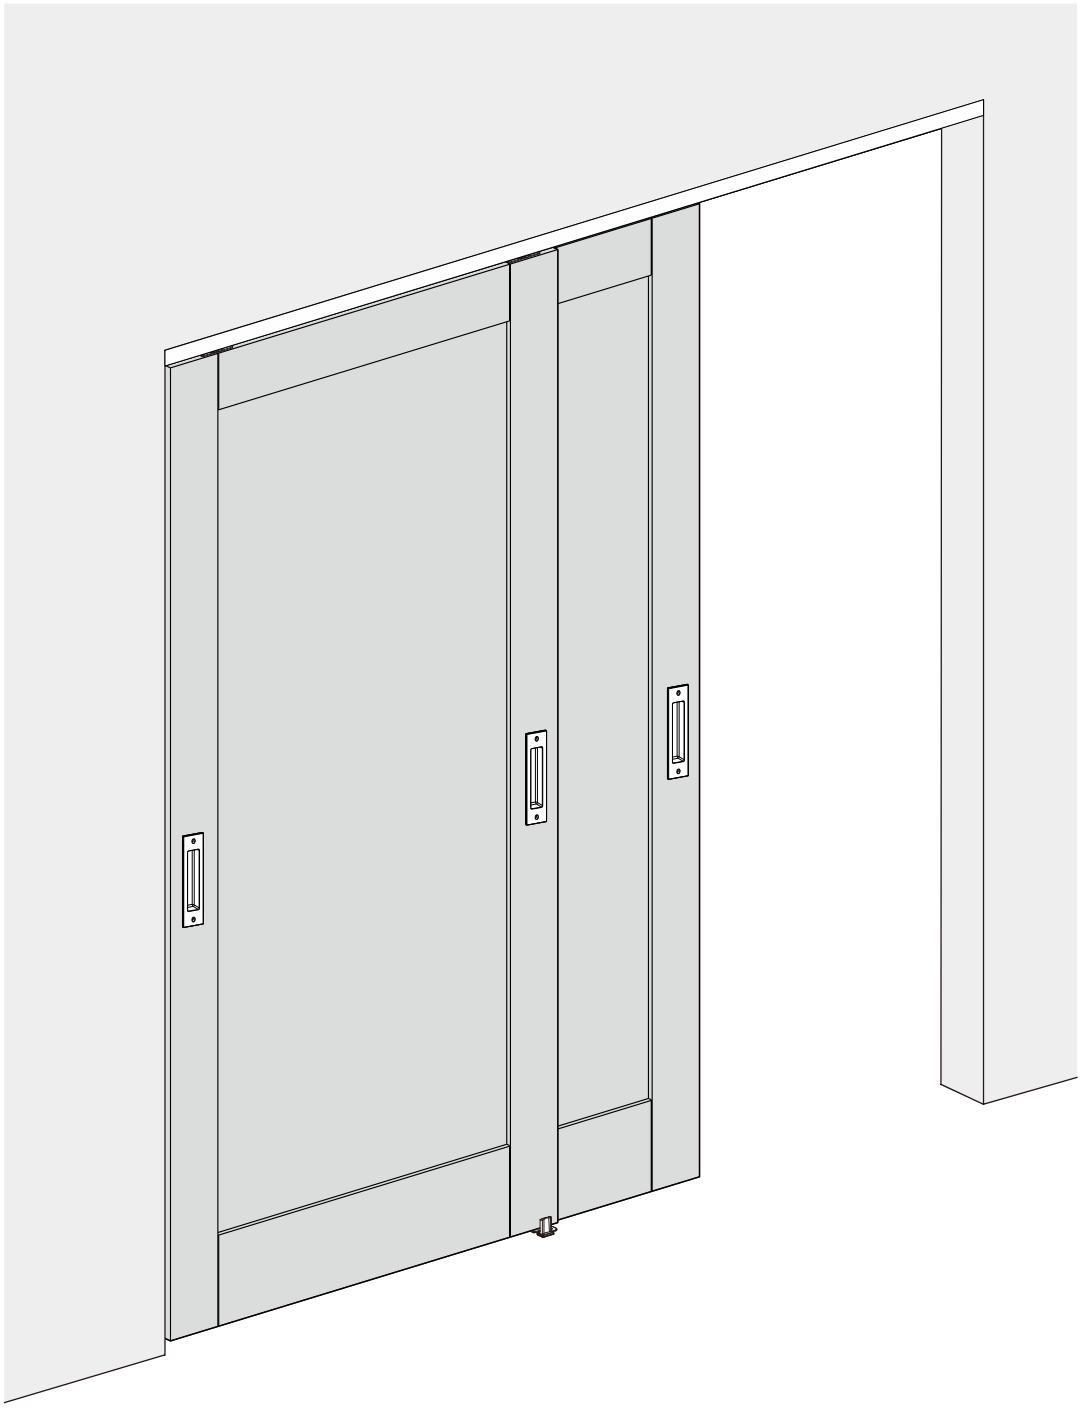

Pre-installation


TOOLS REQUIRED

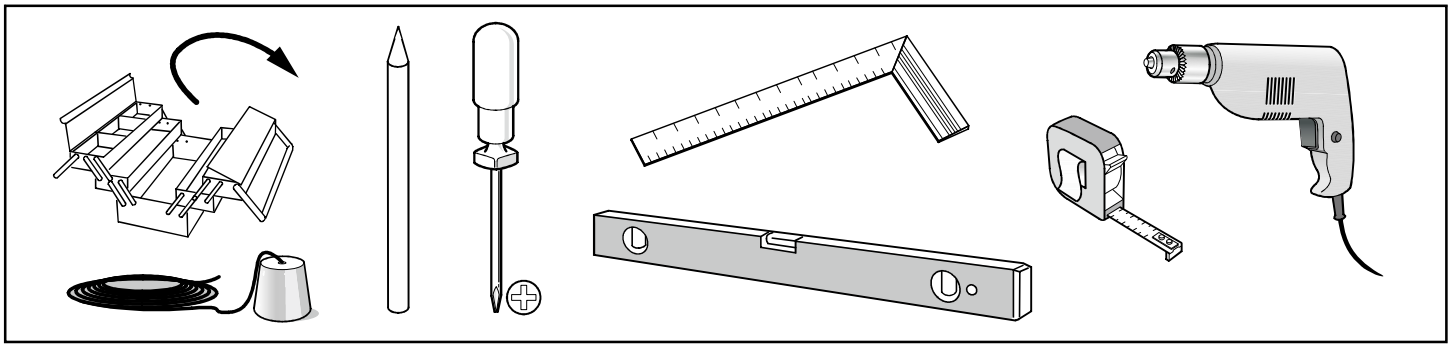


HARDWARE INCLUDED




ST4.2x32 (x9)




(x1)



(x2)




ST5.5x32 (x4)




(x1)




ST4.2x19(x5)

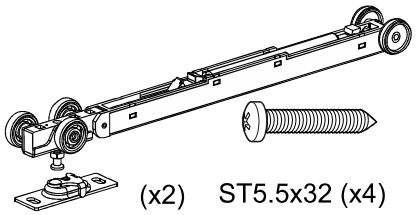


(x2) ST5.5x32 (x4)




(x4)



(x1)






(x1)




(x1)

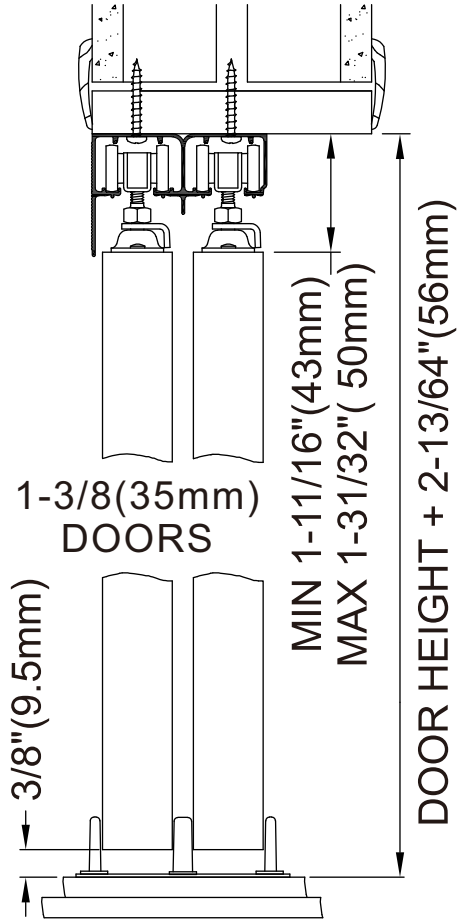


INSTALLTAION INSTRUCTIONS

1 Mount Track to Header: Cut track to fit opening. insert Hangers into track and mount to header with 1-1/4"(32mm) #8 pan head screws.

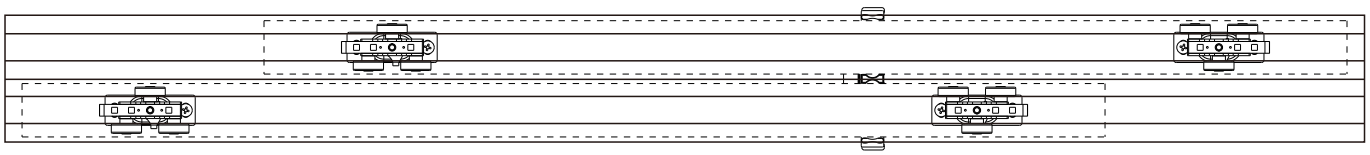



2 Mount Hanger Plates to Door: Fasten door plates to top of door,2-3/4"(70mm) from each edge.

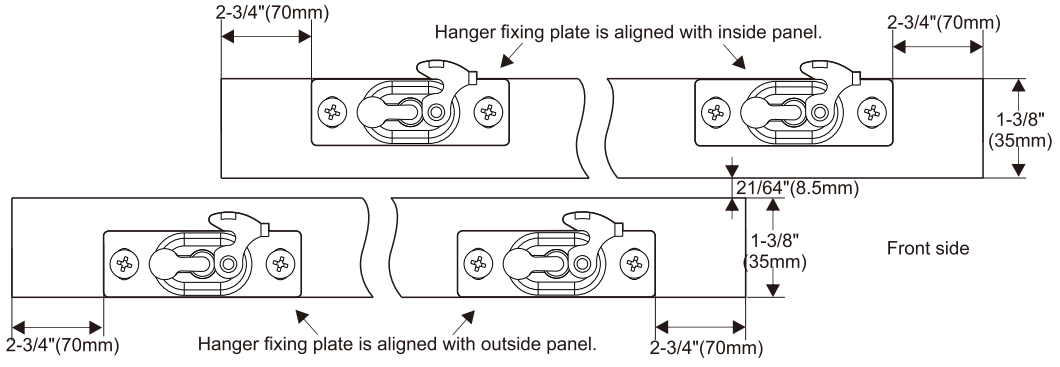

3

Hang Door on front leg of track fi
socket and lock into place with clip. Check for smooth travel.
Repeat with rear door.

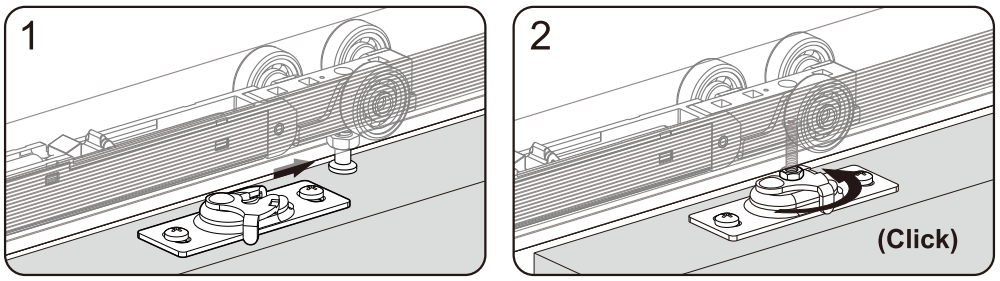

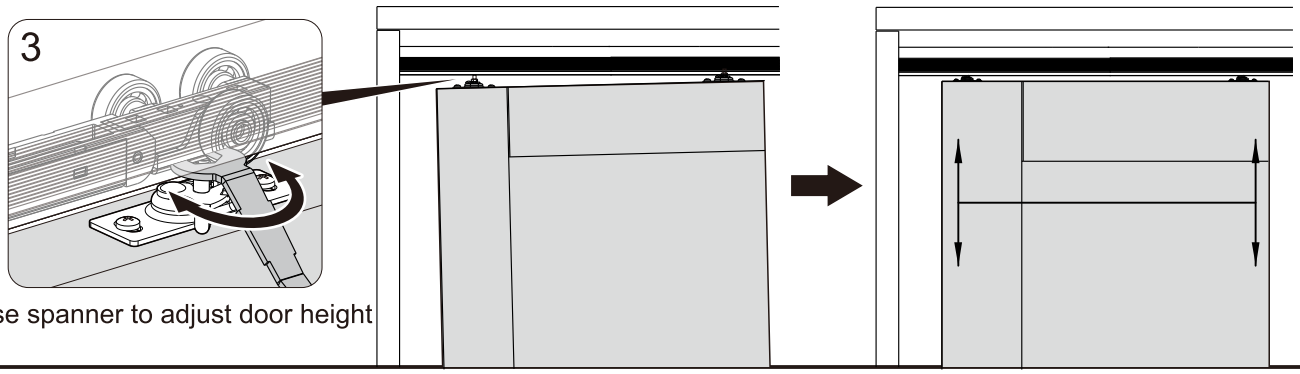


Use spanner to adjust door height


4

Install Bottom Guide: Slide both doors to side jamb.
Place guide between doors and position to plumb, fasten to floor
with screws.

#6 x 3/4"(19mm)

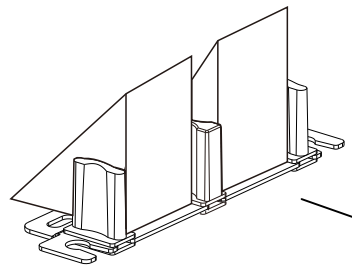


(default for 35 thick door)

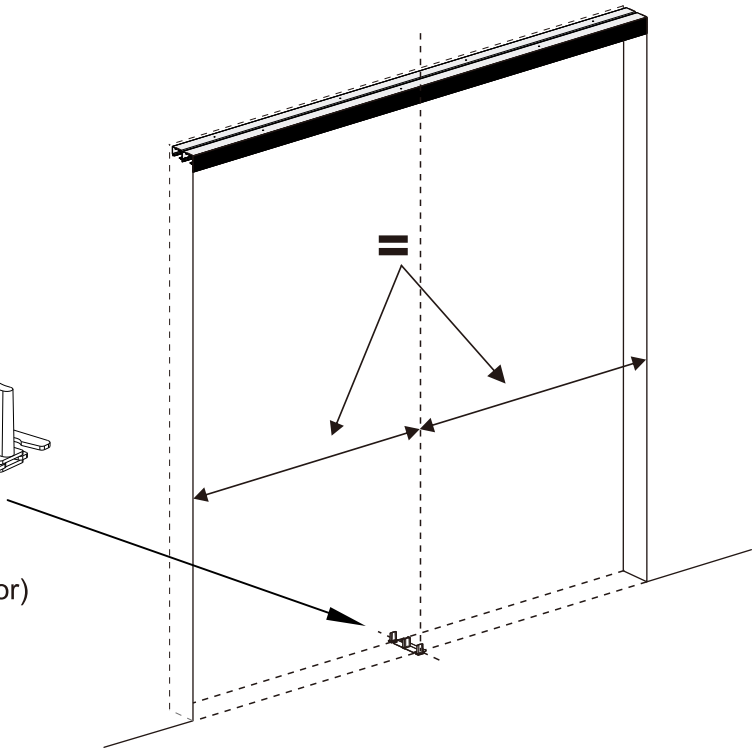

5

Adjust Hangers, if necessary, to plumb doors with jambs.

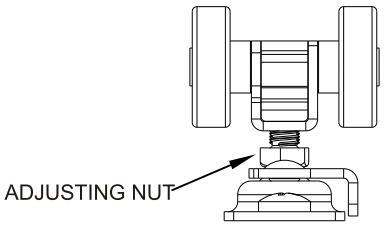

6

Install Stop: Attach Stop on rear of front door 1-1/2"(38mm) from door edge, 1/2"(13mm) from top (Hollow Core) or 40"(100mm) from bottom (Solid Core) doors.
Note: if other than pull is used, adjust location of stop to allow for access to rear door pull.

