EL41030W EL41040W

4" LED Baffle Insert




PROJECT INFORMATION:

Project Name:

Fixture Type:

Date:

DIMENSIONS

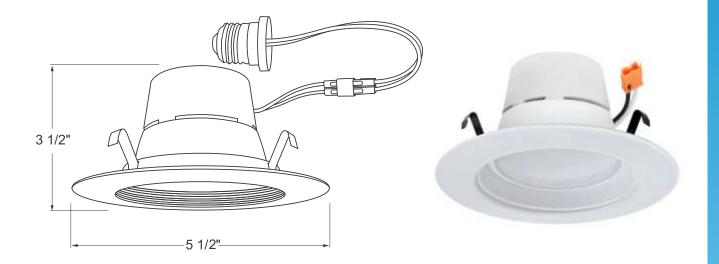

PRODUCT SPECIFICATIONS

- · Suitable for use in fixtures installed in insulated ceilinas.
- Suitable for installation in tall and shallow cans.
- Suitable for new construction and remodel housings.
- · Suitable for installation into a 4" recessed fixtures with 2-wire connector.
- Suitable for installation into a 4" recessed fixtures with medium base socket, using PSA30 adaptor (included)
- · Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant.
- Meets ENERGY STAR requirements.

Lamp: LED array chip CRI 90

EL41030W: 12W 3000°K, 600 lm, 90° beam angle

EL41040W: 12W 4000°K, 800 lm, 90° beam angle

LED Driver: 120V AC, dimmable

Life-span: 50,000 hours

Labels: U.L. listed for wet locations

Warranty: 5 years limited

CATALOG NUMBER

Example: EL41030W EL41040W

