


Bathroom Taps

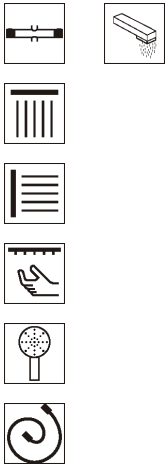

LAUS

Description

- 60 5/8 X 7 7/8 X 19 5/8
- Thermostatic shower column with built-in wax thermoelement and satin stainless steel structure
- Integrated shower head, hand shower support fixed on the column or at wall and bath filler spout. teleducha, additional "joy" hand shower and jet integrated fixed for the lumbar area
- With 1/2 "connections and a distance of 5-7/8" between them, it includes an anti-return valve, a safety stop at 100°F
- The flow rate at 80psi of the hand shower is of 2,3 gpm, of the shower head 4 gpm, of the jets of 5 gpm and the spout 6,5 gpm

Finish




satin stainless steel
100149607

Certifications and quality characteristics



Technical drawing

Dimensions in inches

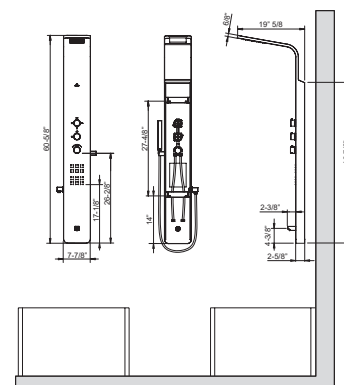

noken
PORCELANOSA BATHROOMS

Warranty: For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2022 noken | Edition: 26/12/2022 USA Ref.093704