



Lotus  
LED  
Lights



**Type IC, Wet & Air-Tight**

**DESCRIPTION**

6" Round Regressed Gimbal LED With  
Integral Driver In Connection Box  
Unique & Patented Design:  
Gimbal Yet Air-Tight Without Housing Needed


**FEATURES & BENEFITS**

3 1/2" Deep - Install Where Ceiling Space Is Limited  
Type IC Rated - No Housing Required  
Fast & Easy To Install - Save On Labor  
Directional Beam - Great for Sloped Ceilings and Artwork  
CRI 90+ for True Color Rendering

**MOUNTING**

Cut Hole In Ceiling And Snap Fixture In Opening With  
Attached Spring Clips. Ceiling Clearance Required: 3 1/2"

**DIMENSIONS:** ID 5 3/4" OD 7 1/2" Cut Out 5 1/4" to 6"

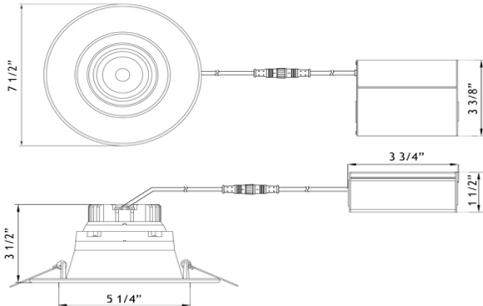

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as  
Cat # LLL-LD1535T

**ORDERING GUIDE** Example: **LRG6 - 30K - WH**

	CCT	Trim Finish	
<b>LRG6</b>	-	-	
2700K	<b>27K</b>	<b>WH</b>	White
3000K	<b>30K</b>	<b>BK</b>	Black
4000K	<b>40K</b>		
Dim to Warm 3000K to 2000K	<b>32K</b>	White Trim Only In Stock	

**Lotus LED Lights USA**

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

250 H Street # 301, Baine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

**Lotus LED Lights CANADA**

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON

**LRG6**

**6" Round Regressed Gimbal LED 15 W**

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION	
Applications	Sloped Ceilings
Energy Used	15 W
Color Temperature	2700   3000   4000   DTW 30-20
Light Output	1200   1250   1300   900
Halogen Equivalent	120 W
Beam Angle	38° wide beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year on Residential 5 Year on Commercial Applications

**AVAILABLE TRIMS**



White



Black

**ACCESSORIES**

Sold Separately



Low Volage Extension Cables  
6ft - cat # **EXC6**, 20ft - cat # **EXC20**  
Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP6**



Flanged Rough-In Plate - cat # **FRP6**

**COMPLIANCE**



**Type IC  
Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954