

Owner's Manual & Operating Instructions



- Knock-down 17" High Steel Frame with Pot Holders, 13" Diameter Cooking Surface.
- Adjustable side pot holders
- 30 Quart Aluminum Turkey Fryer Pot & Strainer Basket.
- 10 Quart Aluminum Fish Fryer pan & Strainer Basket.
- 10 PSI CSA Certified Regulator with Hose.
- 55000 BTU Cast Iron Burner.
- Chrome Plated Hanger
- Poultry Rack
- Plastic Injector
- 12" Probe Thermometer.

FRY !

Deep FRY !

Boil !

For Outdoor Use Only

Read all Warnings and Operating Instructions before use and retain for future reference.

WARNING: Propane gas is highly amammable and under pressure in the cylinder or tank. Do Not store or use gasoline or other amammable liquids or vapors in the vicinity of this stove. If you detect the odor of gas, immediately evacuate the enclosed area and contact the appropriate authorities/professionals.

! DANGER




FOR YOUR SAFETY

Do not store or use gasoline or other liquids with amammable vapors in the vicinity of this or any other appliance.

IF YOU SMELL GAS:

1. Do Not attempt to light appliance.
2. Extinguish any open ame.
3. Disconnect from fuel supply.

Assembly Instructions

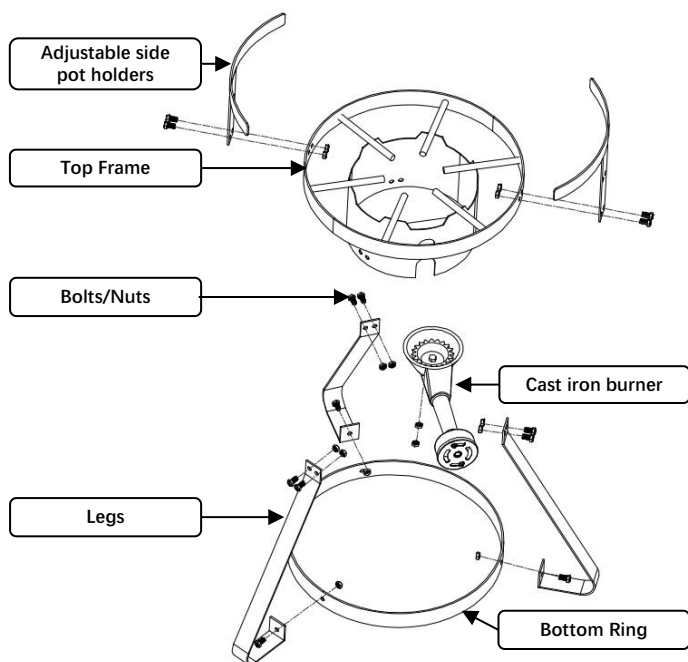

TOOLS NEEDED FOR ASSEMBLY

- Adjustable Wrench
- Phillips screwdriver

INSTRUCTIONS


- (1) Assembly three legs to the windshield of top frame with 6pcs bolts and nuts.
- (2) Assembly three legs to the bottom ring with 3pcs bolts and nuts.
- (3) Assembly two adjustable side pot holders to the top frame with 4pcs bolts and nuts.
- (4) Unscrew the pre-assembled lock nut and flange nut from the threaded pin of the cast iron burner, then insert the threaded pin of burner through the hole of the support bar of top frame, wrench tighten flange nut and lock nut.

*Make sure all hardware are used and wrench tighten.

Instructions

PREPARATION:

1. Place stove on a level, stable surface.
2. Attach propane hose to the brass stove inlet fitting.
3. Make sure propane bulk tank valve is closed.
4. Attach propane hose to outlet of propane tank.
5. Slowly open propane tank valve and check for leaks by applying small amount of liquid soap and looking for bubbles to appear.



Note: When connecting the Hose to unit, insert the male fitting of the hose. Tighten the fitting onto the throat of the burner using a **wrench**. Do not overtighten. You should be able to turn the air control panel.

LIGHTING INSTRUCTIONS

1. Read instruction before lighting.
2. When you are sure there are no leaks, turn cylinder valve and regulator control valve on hose to the closed position.
3. Have a fireplace match or long-nosed lighter lit and over the burner from SIDE. Keep hands and face away from burner.
4. Slowly open gas supply until burner ignites, keeping hands and face away from burner.
5. Adjust the regulator control valve for desired flame height.
6. When finished using the cooker, turn off gas cylinder valve first. It will take a few secondfor the fire to go out and for the propane gas to bleed from the hose and regulator assembly. After the fire is completely out, turn regulator control valve to the OFF position.
7. To re-light, repeat steps 1-6. Always use CAUTION as cooker will be hot.
8. If ignition does not occur in 5 seconds, turn the burner control(s) off, wait 5 minutes, and repeat the lighting procedure.

STORAGE

1. DO NOT leave propane tank attached to stove during storage or transport.
2. Wipe the burners, steel cooking grate, and propane hose before storing.
3. It is suggested to store stove and hose in a nylon storage bag to keep it clean.

CAUTION

DO NOT attempt to connect your camp stove to a natural gas supply. Use only with propane, hose and regulator supplied with the stove and an approved bulk propane tank.

