



Transitions® | K-2599-RL

Nightlight ReadyLatch® Quiet-Close™ elongated toilet seat

Features

- Integrated child-size seat offers a comfortable, easy-to-use option for children
- Grip-Tight installation hardware makes it easy to fasten the seat – everything is done from above the bowl
- ReadyLatch® hinge provides a positive lock/unlock latch to securely hold seat in position, yet seat easily removes for cleaning or adjusting fit
- Quiet-Close™ elongated lid and seat prevents slamming
- Grip-Tight bumpers hold seat firmly in place
- Light intensity designed to provide enough light to see the toilet without disrupting nighttime vision
- Choose between three brightness levels: a soft glow or brighter illumination
- Dual LED lighting offers guiding light when lid is down and task light when lid is lifted
- Illumination cycle with automatic 10-hour nightlight
- Battery-operated - no electrical cords required
- Up to 12 months of battery life (uses 4 AA batteries, not included)
- Contoured seat for user comfort
- Color-matched plastic hinges
- Fits most elongated toilets



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|---------|
| 0 | White |
| 96 | Biscuit |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-30-2026 03:27 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

IAPMO/ANSI Z124.5

Technical Information

All product dimensions are nominal.

Lighting Included:	Yes
Seat Shape Type:	Elongated
Seat Front Type:	Closed-front
Seat-Mounting Holes:	5-1/2" (140 mm)

Material

- Plastic construction
-


Warranty

See website for detailed warranty information.


KOHLER® Toilets and Seats Limited Warranty



Adult Ring

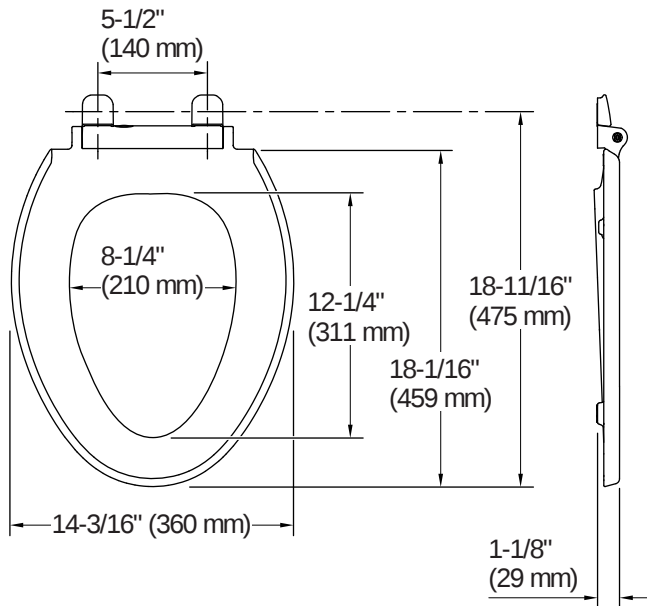

Child Ring

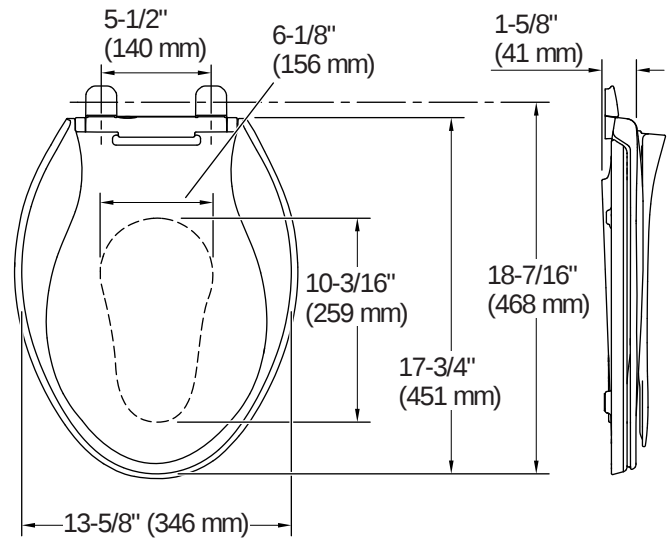

Installation Notes

Install this product according to the installation instructions.

