


ASSEMBLY INSTRUCTIONS

METAL GARDEN SHED



E-mail:
hofficeservice@gmail.com

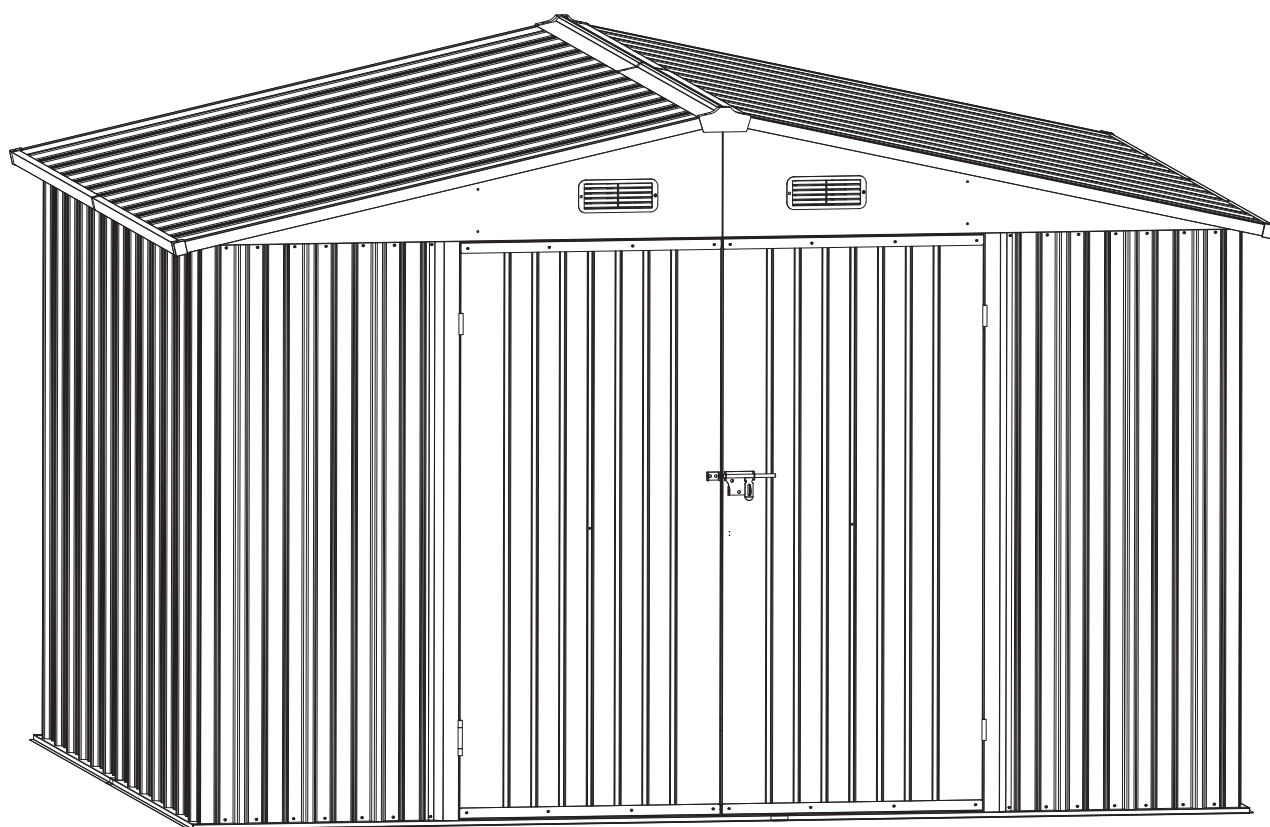


Metal Garden House
Installation Tutorial
[https://youtu.be/3S
TNLjT_dB8](https://youtu.be/3STNLjT_dB8)

SITE PREPARATION


Level the ground surface.



Recommendation: Construct a wooden or concrete base as a foundation.

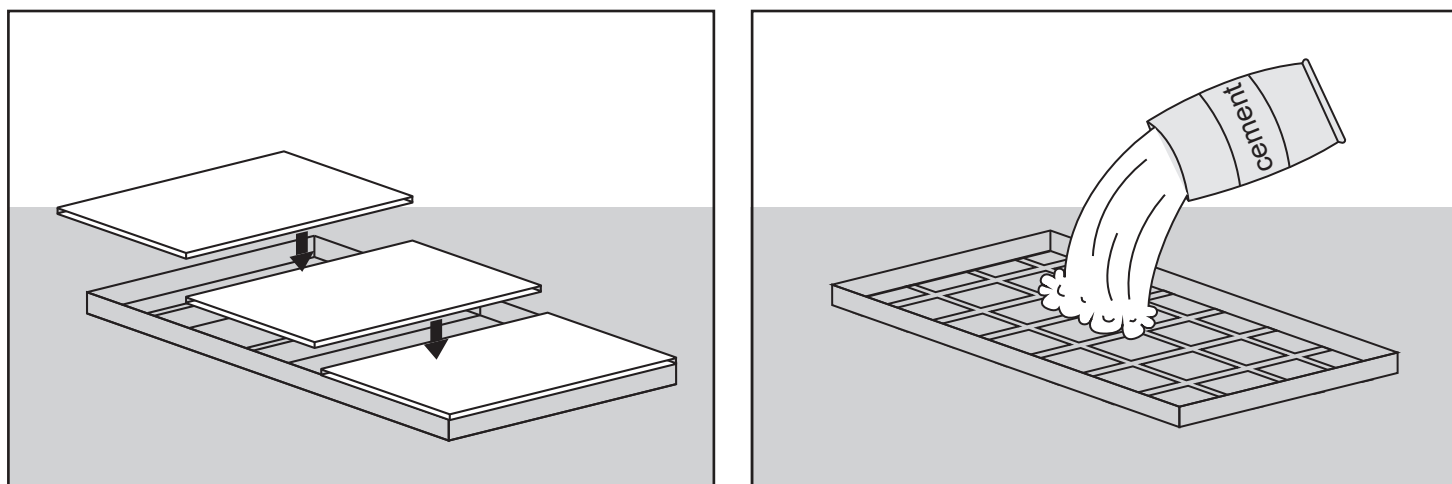

The external dimensions of the product :

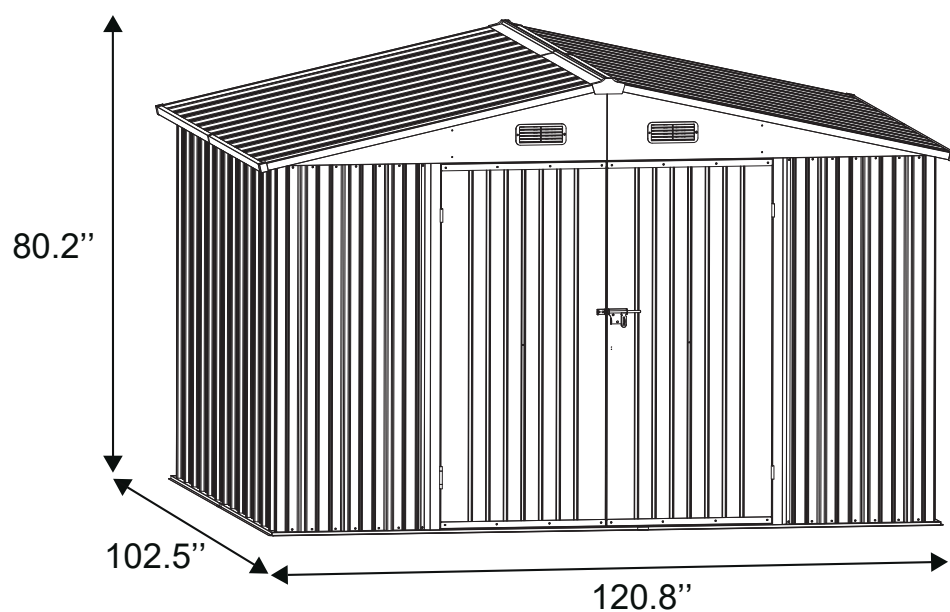

BEFORE STARTING ASSEMBLY


Remove all of the pieces from the 4 packages and spread them out on the ground. Before installation, please check the type and quantity of parts first.

It is recommended to use a clean work surface to spread the parts out and for pre-assembly steps. Review all instructions before you begin, continue to refer to instructions during assembly.

Be sure to follow all steps thoroughly.

Please prepare these components in advance at the beginning of each stage.

REQUIRED TOOLS

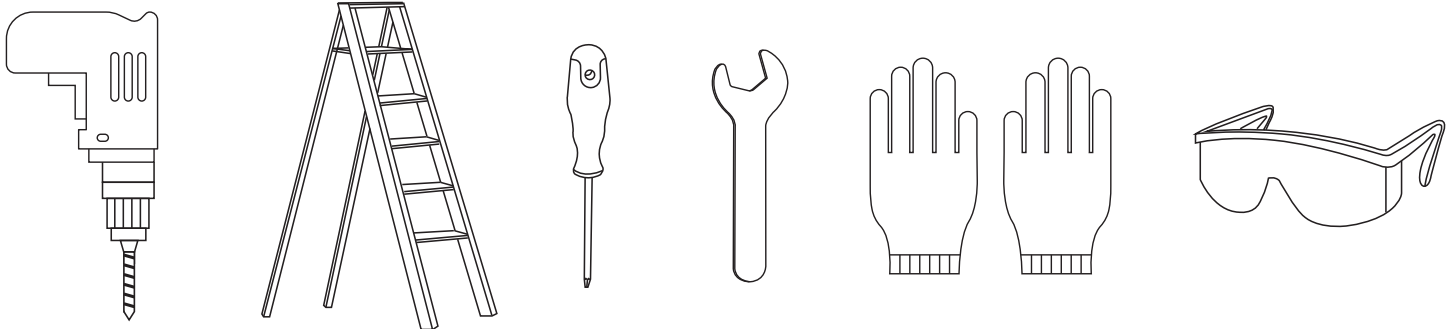

CAUTION







Some parts have steel edges. Please be careful when handling components. Always wear work gloves, eye protection and long sleeves when assembling or performing any maintenance on your shed. Do not attempt assembly on days with strong winds or low temperatures.











Requires two people and takes 2-3 hours for Installation.
Recommended to wear gloves to avoid scratches.
Please read the manual carefully before installation.

**DO NOT RETURN YOUR UNIT
TO THE STORE**
Contact us first
hofficeservice@gmail.com





FOUNDATION

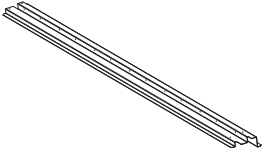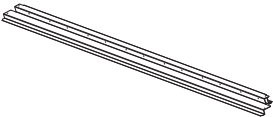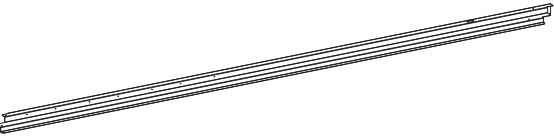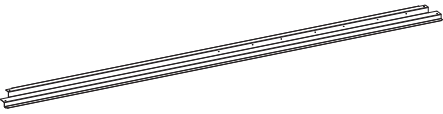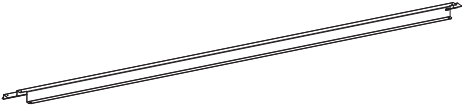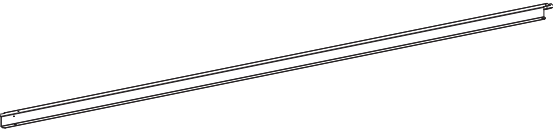 <p>1 X2</p>	 <p>2 X2</p>
 <p>BS1L X1</p>	 <p>BS1 X1</p>
 <p>BS2L X1</p>	 <p>BS2 X1</p>



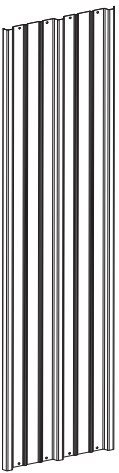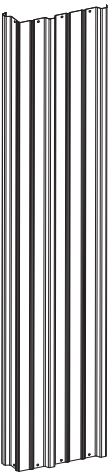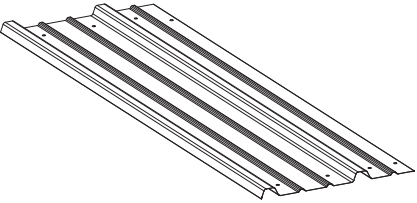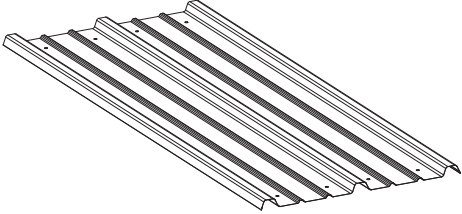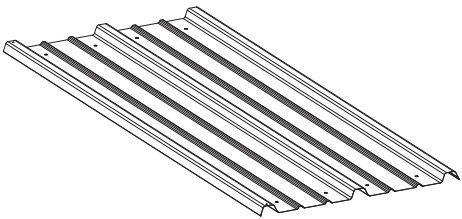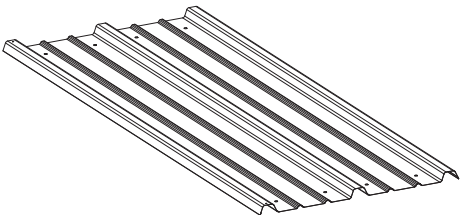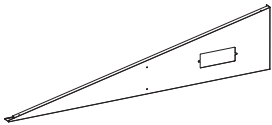





PLATES

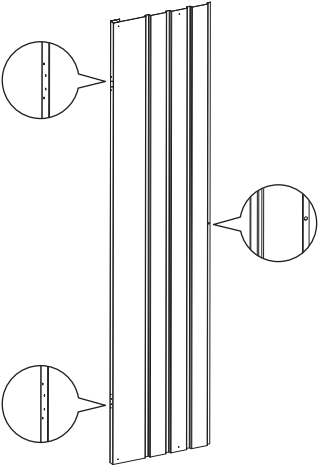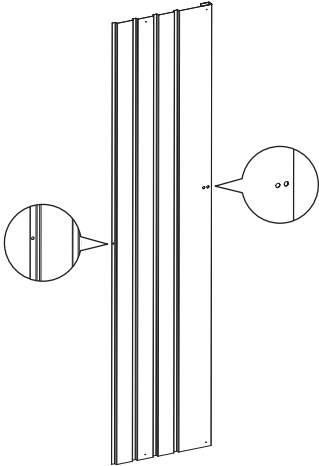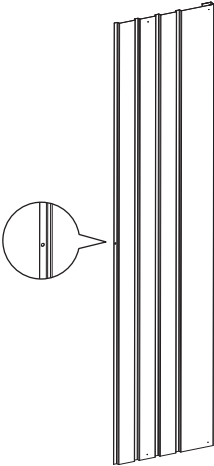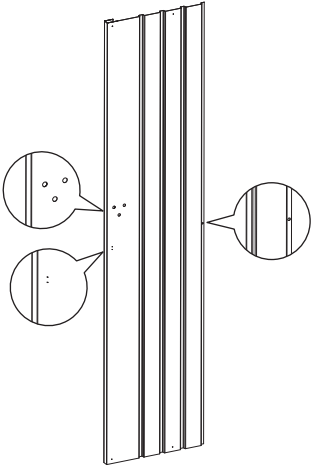 <p>W1A X20</p>	 <p>WS2A X4</p>	 <p>P1 X2</p>
		 <p>P2 X2</p>
 <p>P3 X8</p>		 <p>P3A X2</p>
 <p>21L X2</p>		 <p>21R X2</p>












PLATES

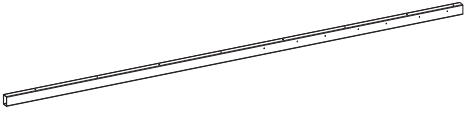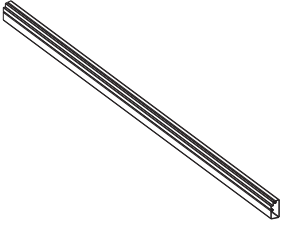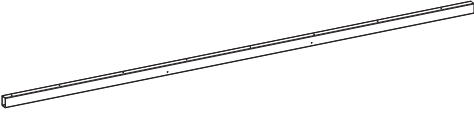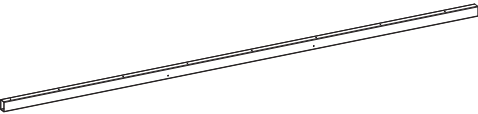 <p>DLA X1</p>	 <p>DLB X1</p>	 <p>DRA X1</p>	 <p>DRB X1</p>
--	---	--	---

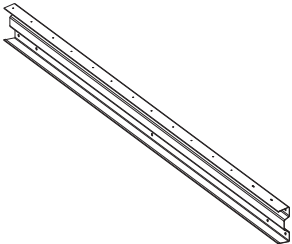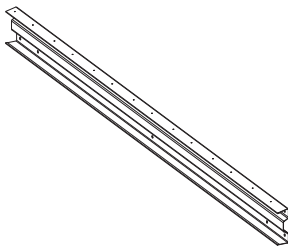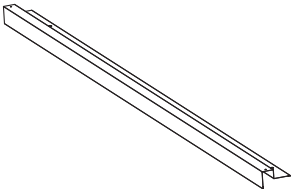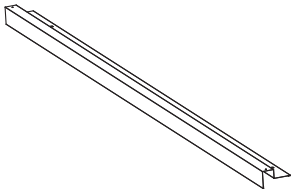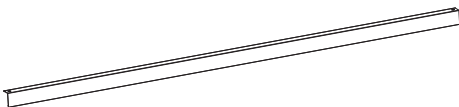
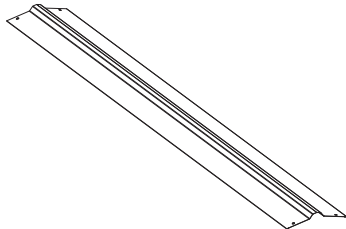









STRIPS

 <p>UL1 X1</p>	 <p>UR1 X1</p>	 <p>DX2 X4</p>
		 <p>7 X1</p>
 <p>8 X1</p>		 <p>9 X4</p>
 <p>10L X1</p>		 <p>10R X1</p>


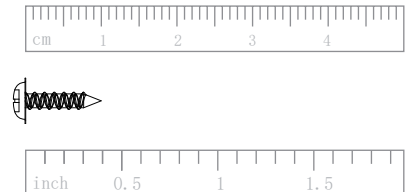

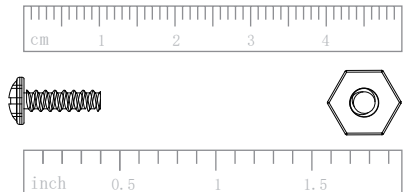




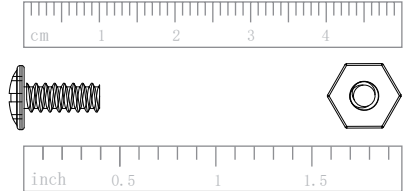


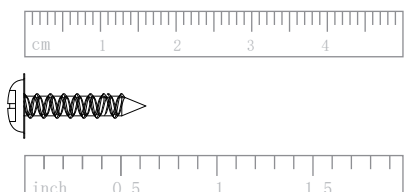
STRIPS

 <p>13 X4</p>	 <p>14 X4</p>		
 <p>15 X2</p>	 <p>16 X2</p>		
 <p>17 X4</p>	 <p>19 X2</p>		
 <p>20 X4</p>	 <p>GS X2</p>	 <p>B1 X4</p>	 <p>B2 X2</p>
 <p>B3 X2</p>			


STANDARD

			
DG X1	DF X1	DC X2	DH X4
			
C2 X4	GF X4	GR X2	GE X2
			
GC X4	S1 X104	V2 X418	

SCREW

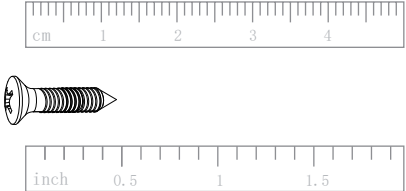
  <p>F1(X459) M4*10</p>	   <p>F2(X54) M4*10</p>
  <p>F3(X32) M5*12</p>	   <p>F4(X5) M6*10</p>
  <p>For GC F5(X4) M4*16</p>	

CONTENTS

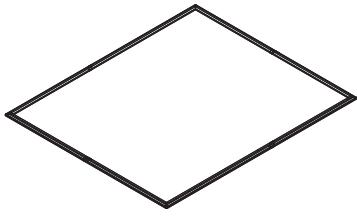


Bottom frame

10-11
(page)

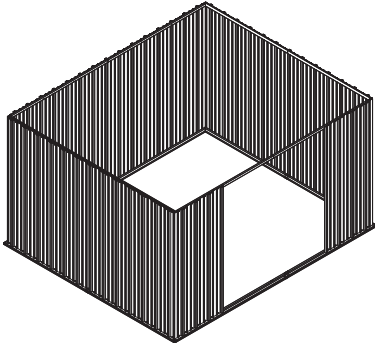


Wall

12-19
(page)

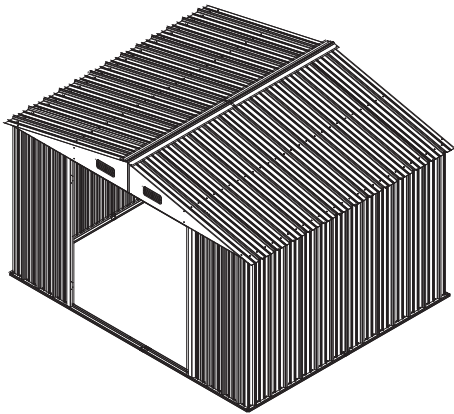

Roof


19-27
(page)

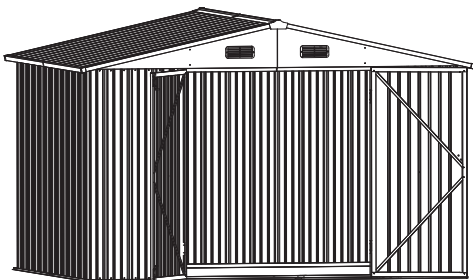


Door

27-32
(page)


STEP 1

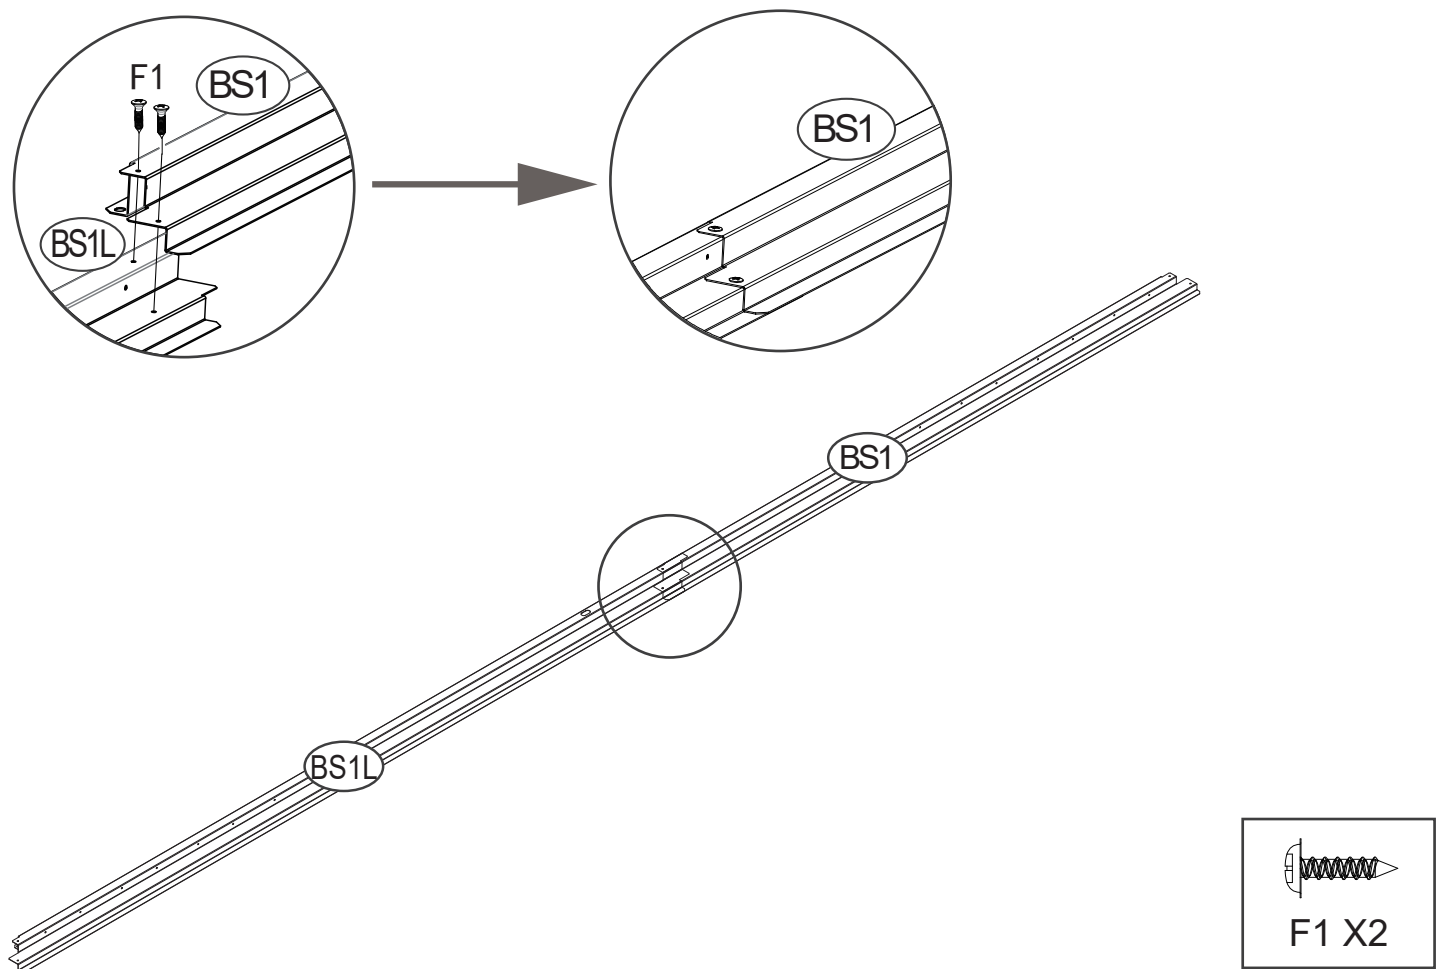


STEP 2

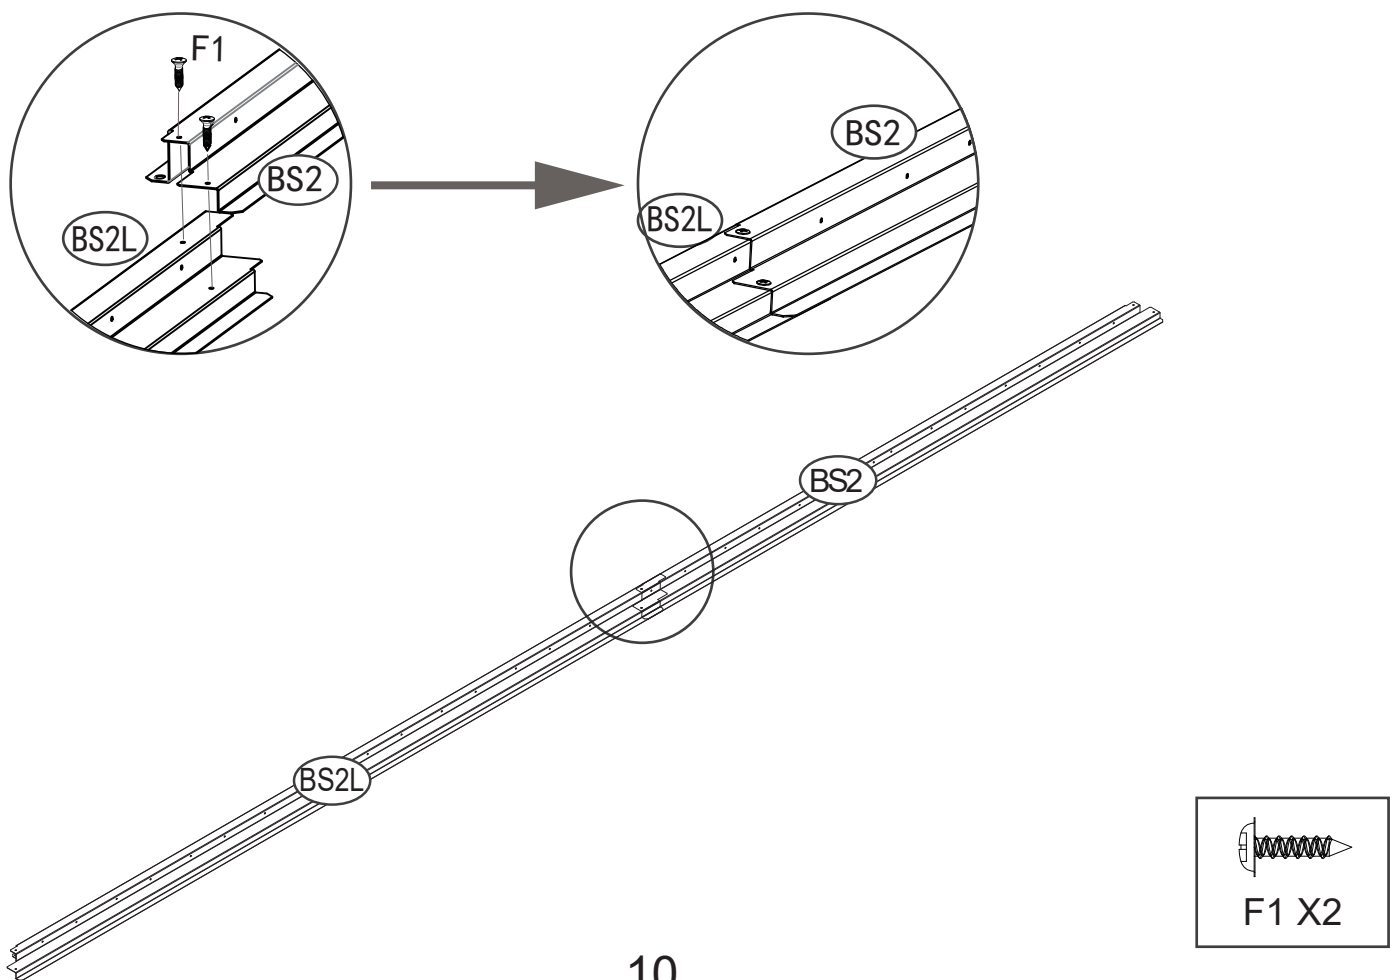

STEP 3

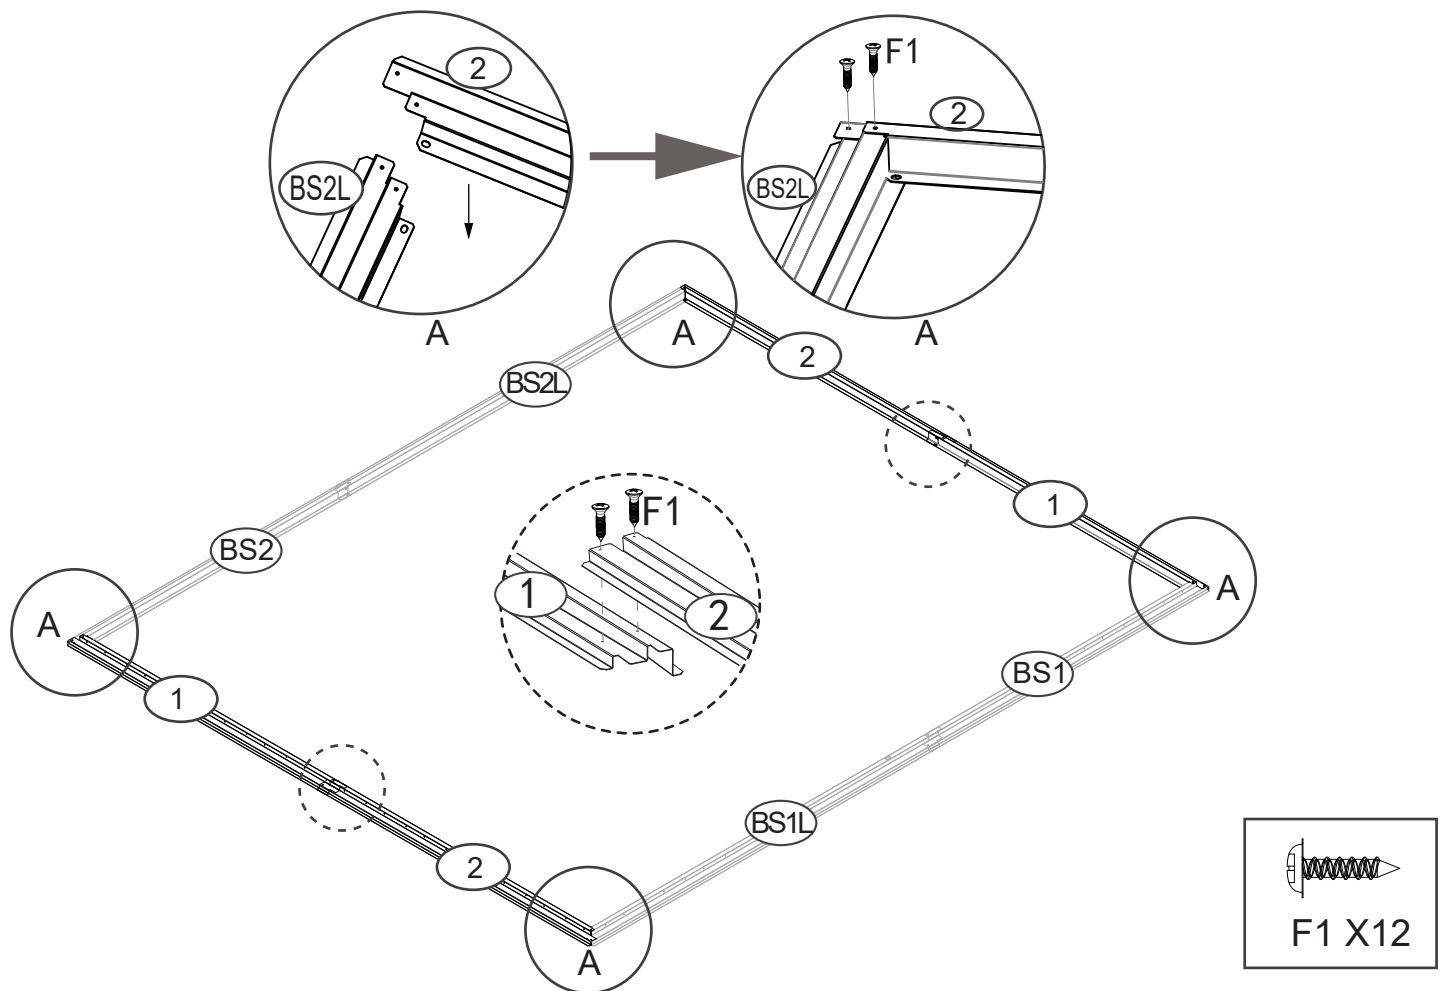


STEP 4

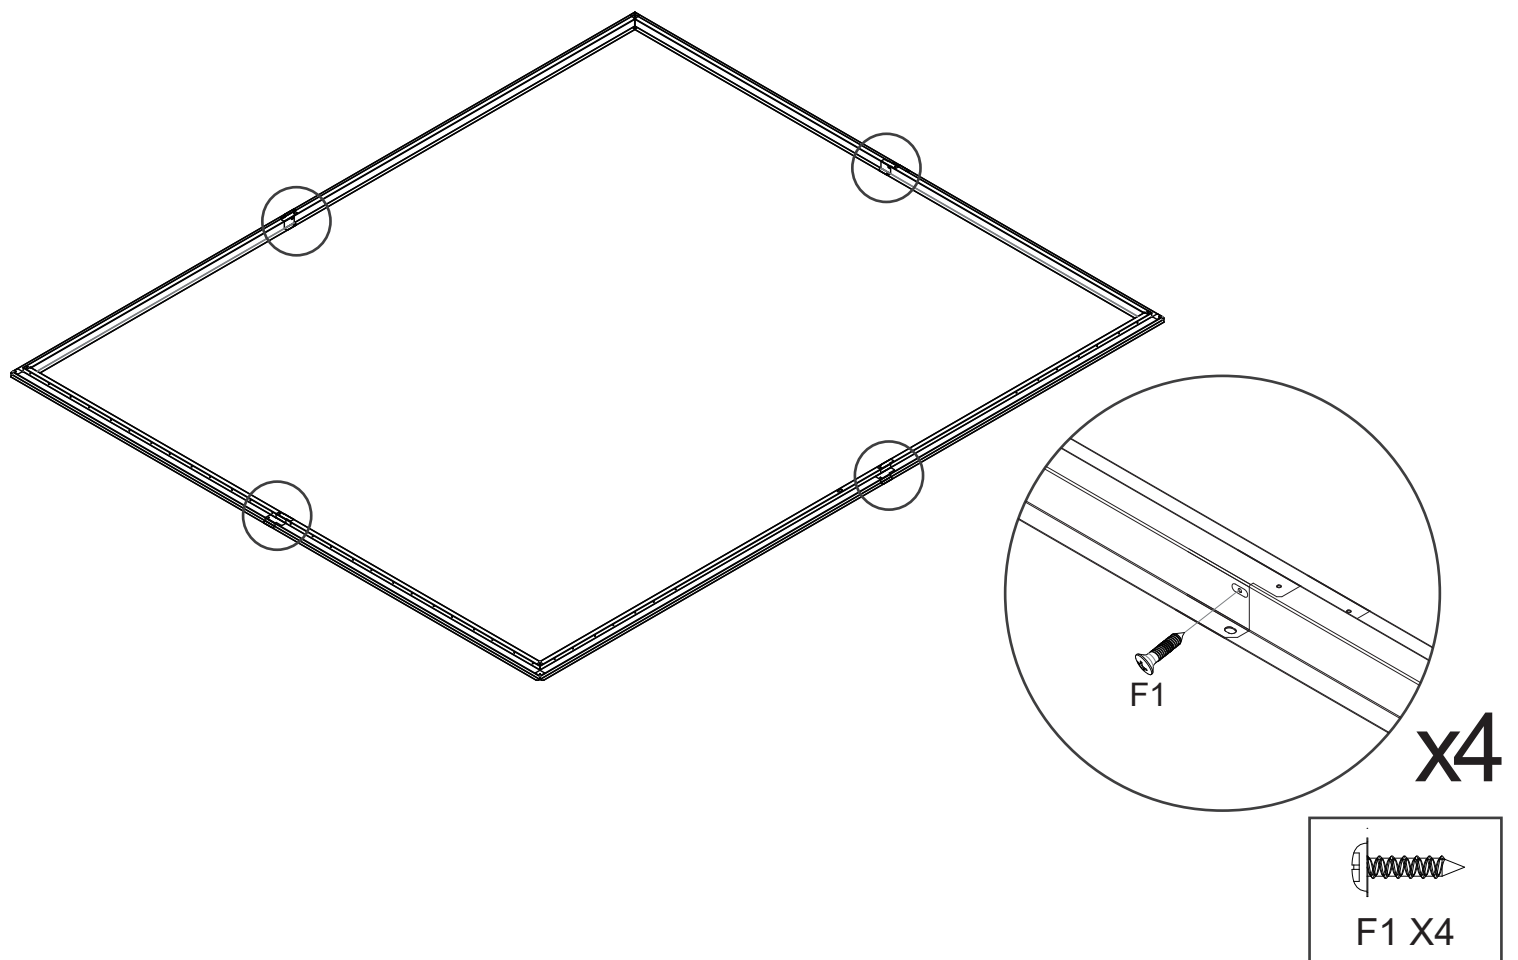


STEP 5


Tips: Align the gasket with the hole, and then use the electric drill to drill the V2 into the hole.

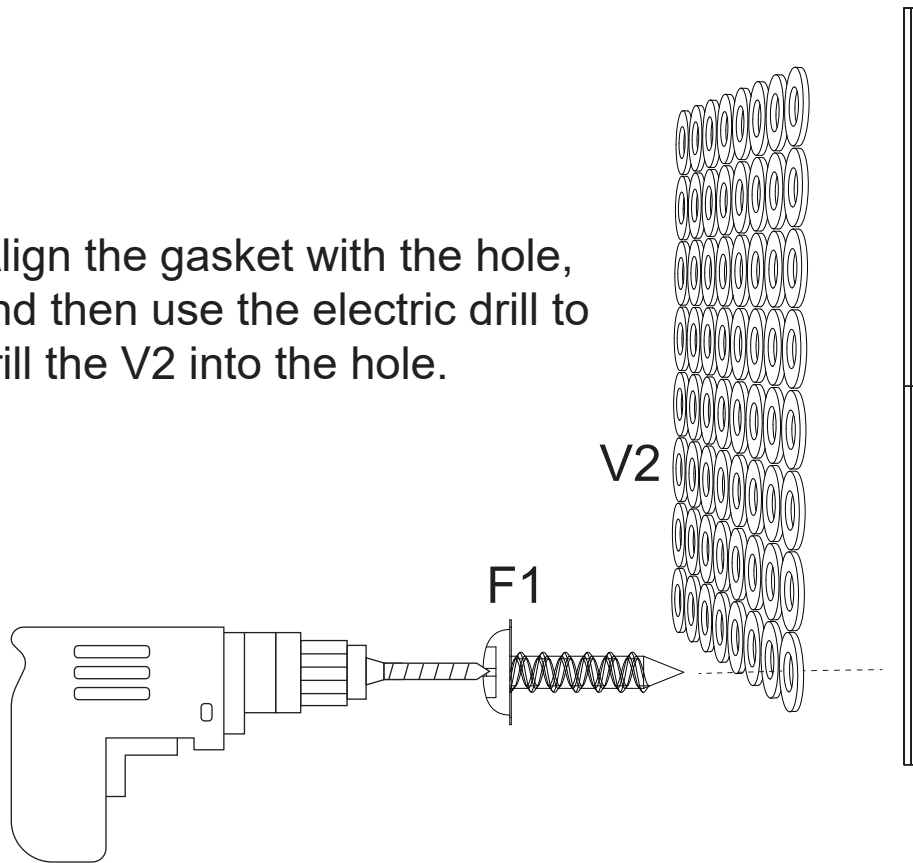


STEP 6

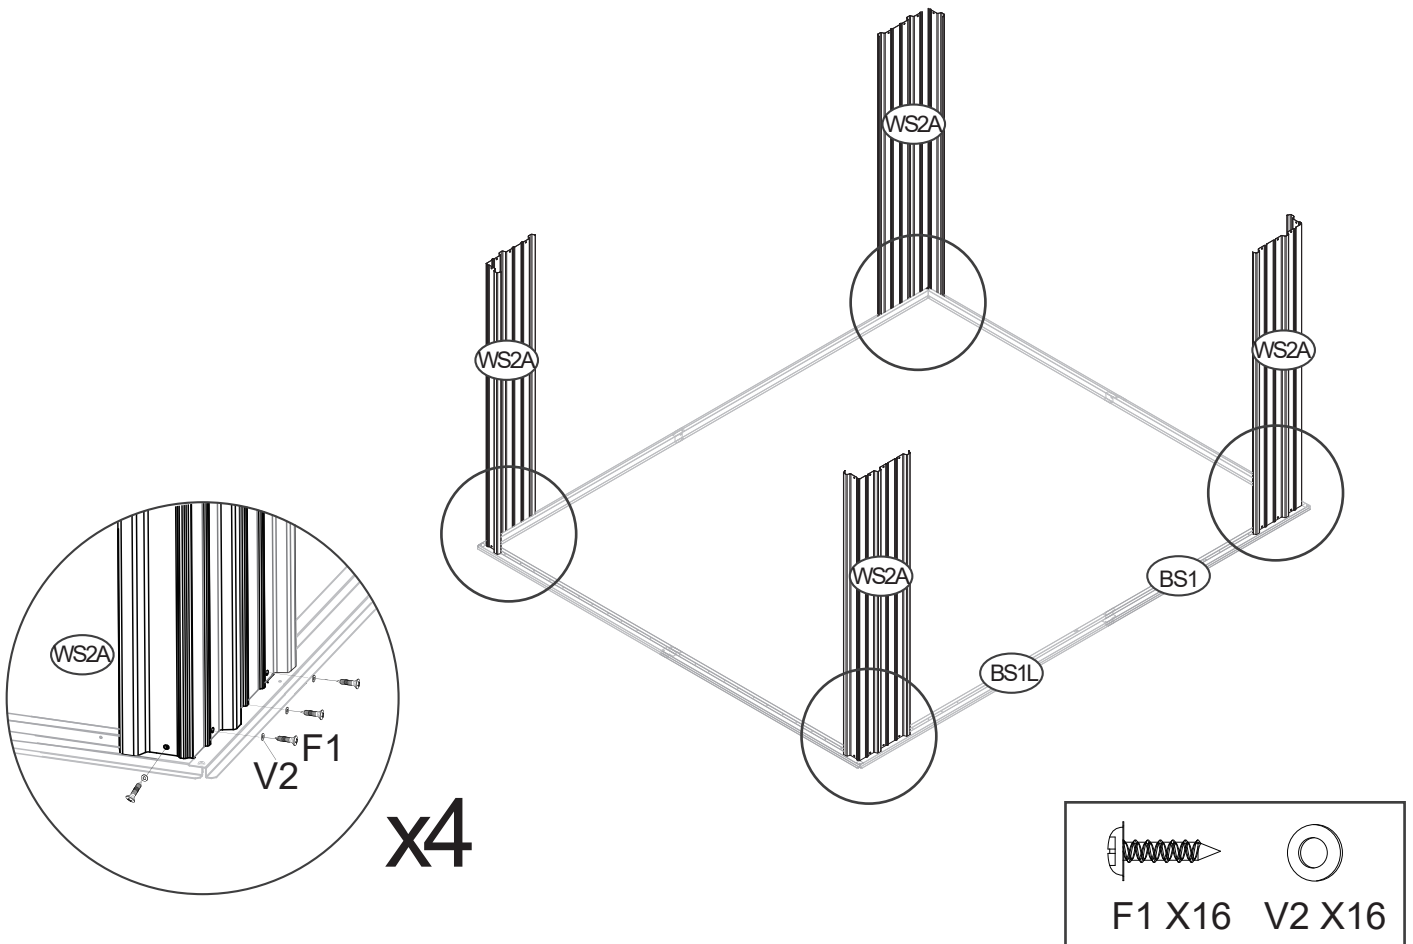



STEP 7

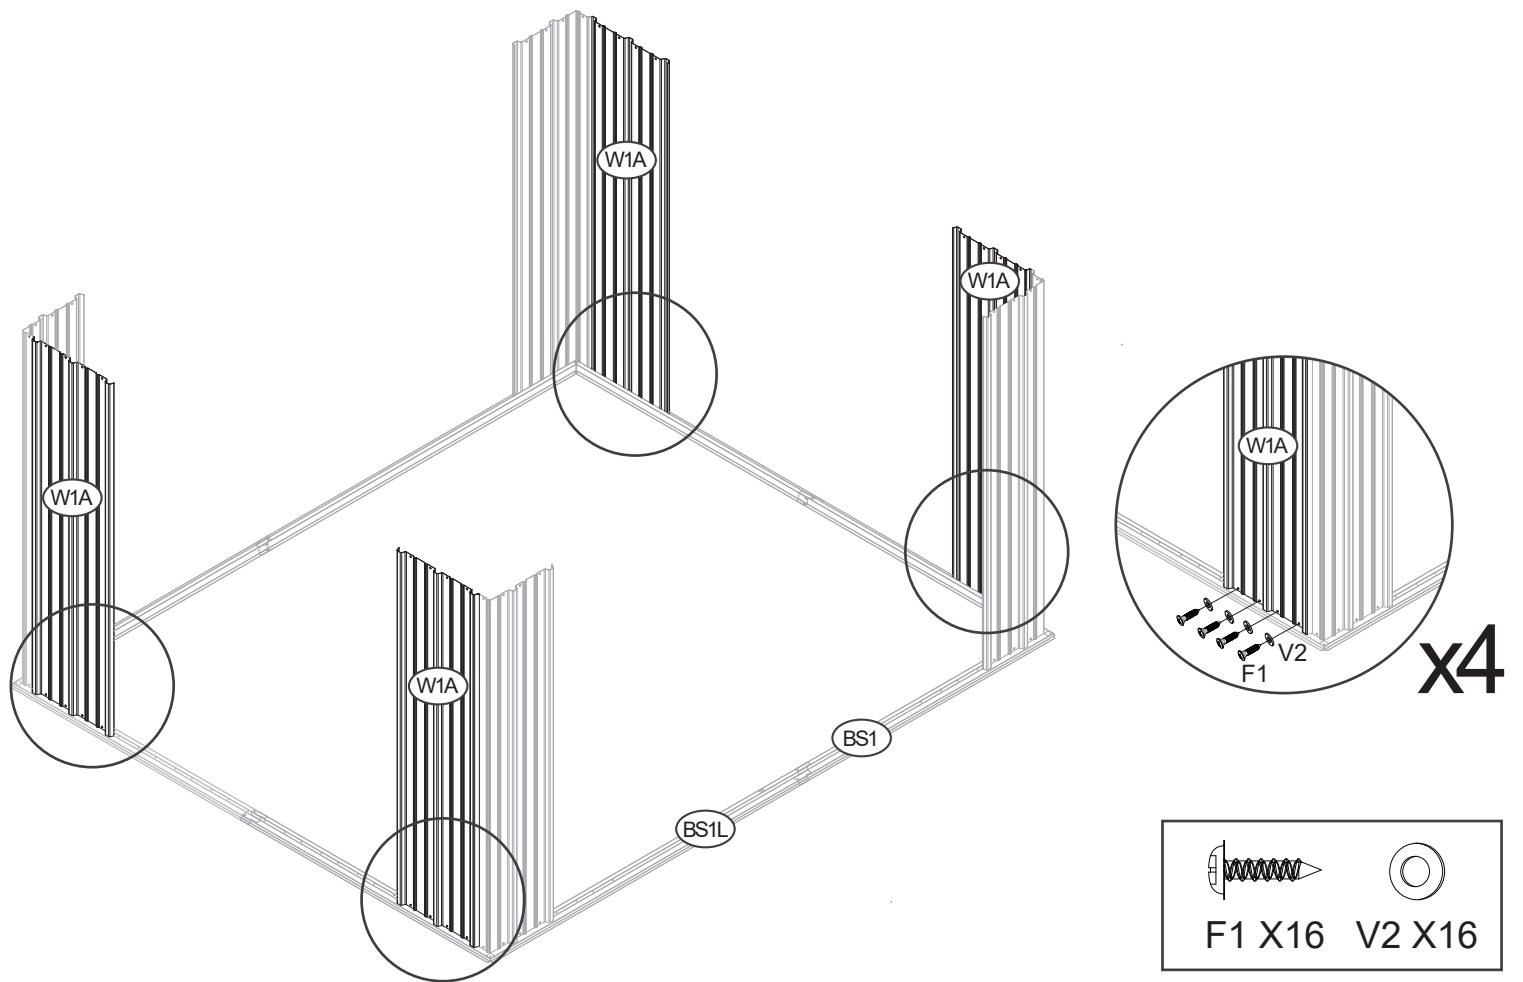

STEP 8

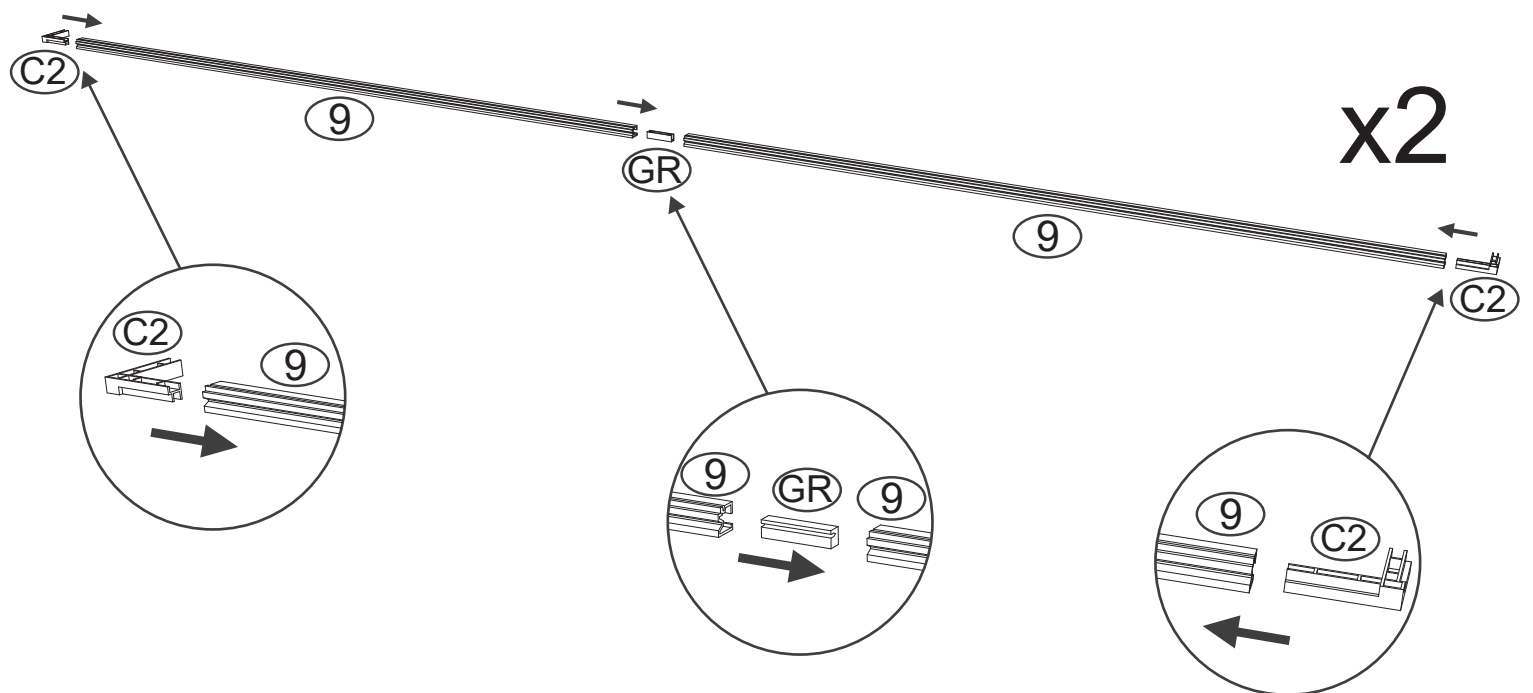


STEP 9

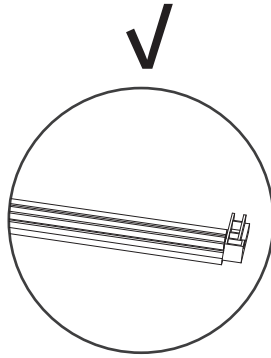


Note:
Connector must fit.


STEP 10

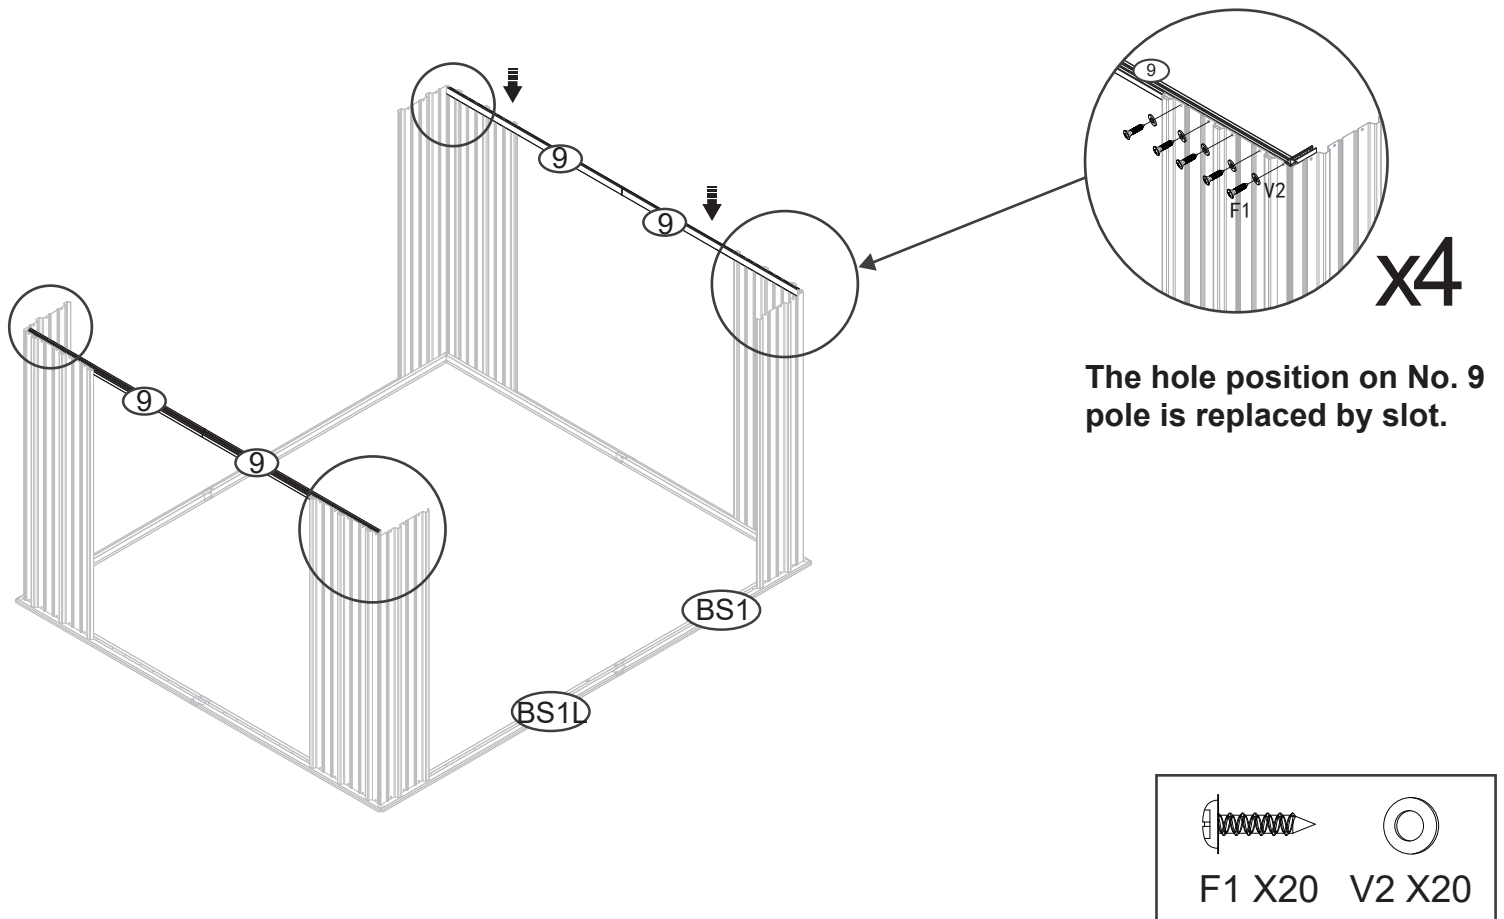


STEP 11

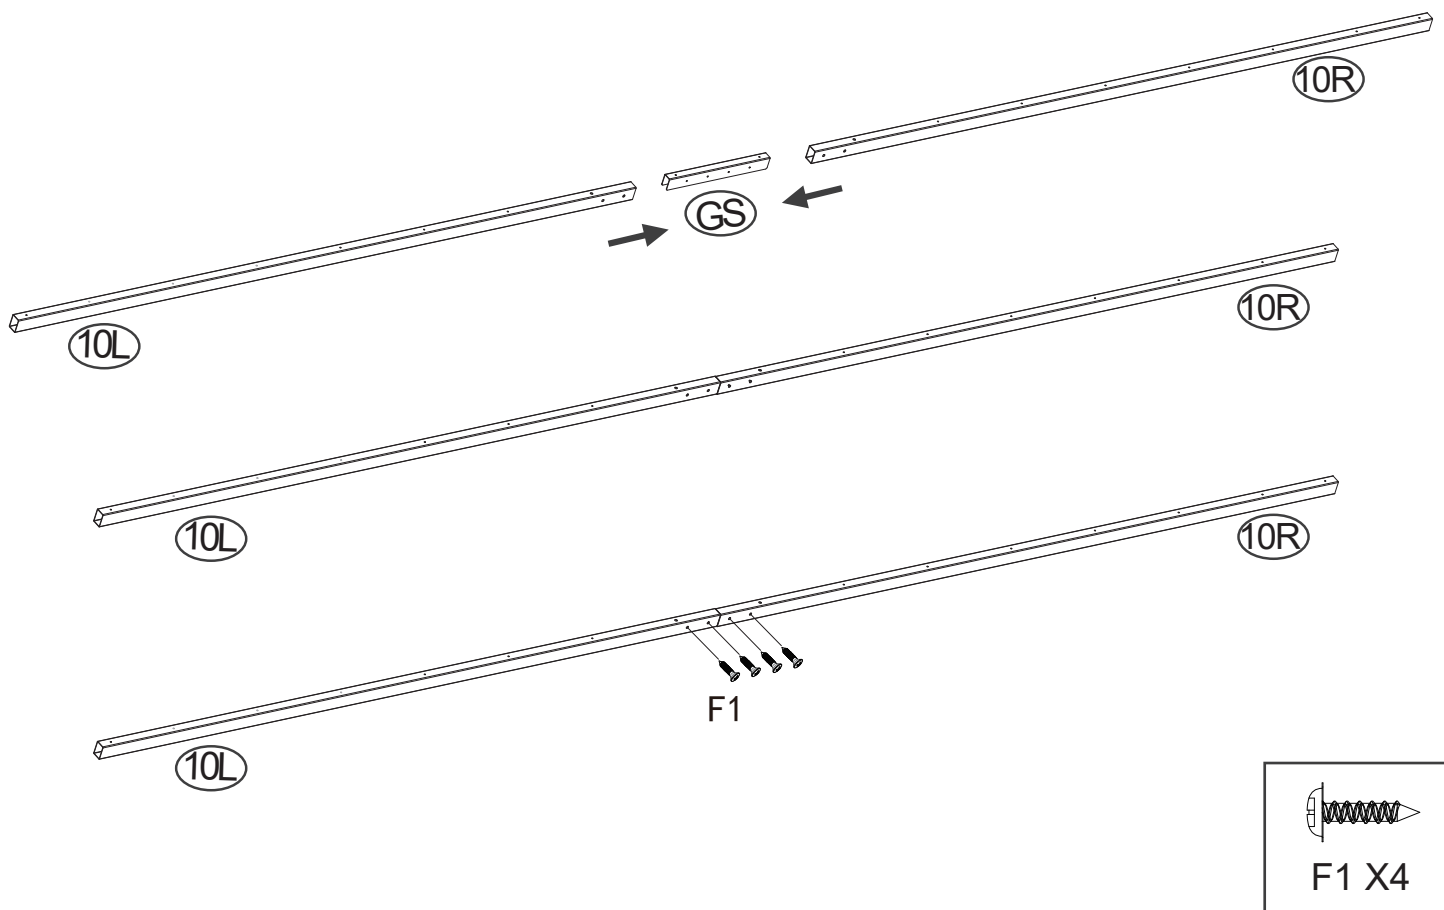


STEP 12

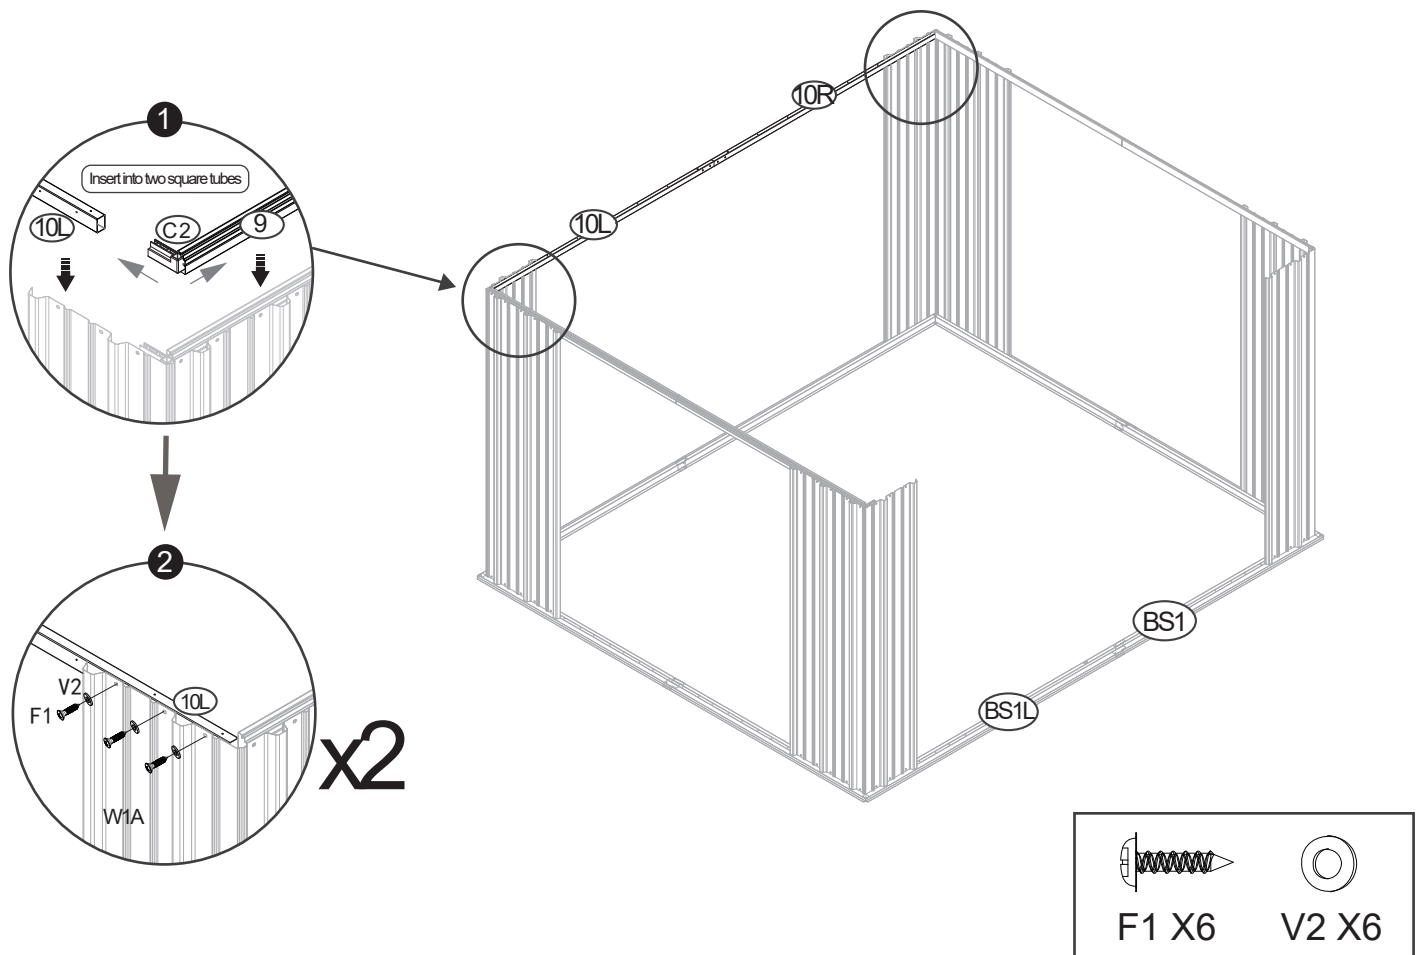


STEP 13

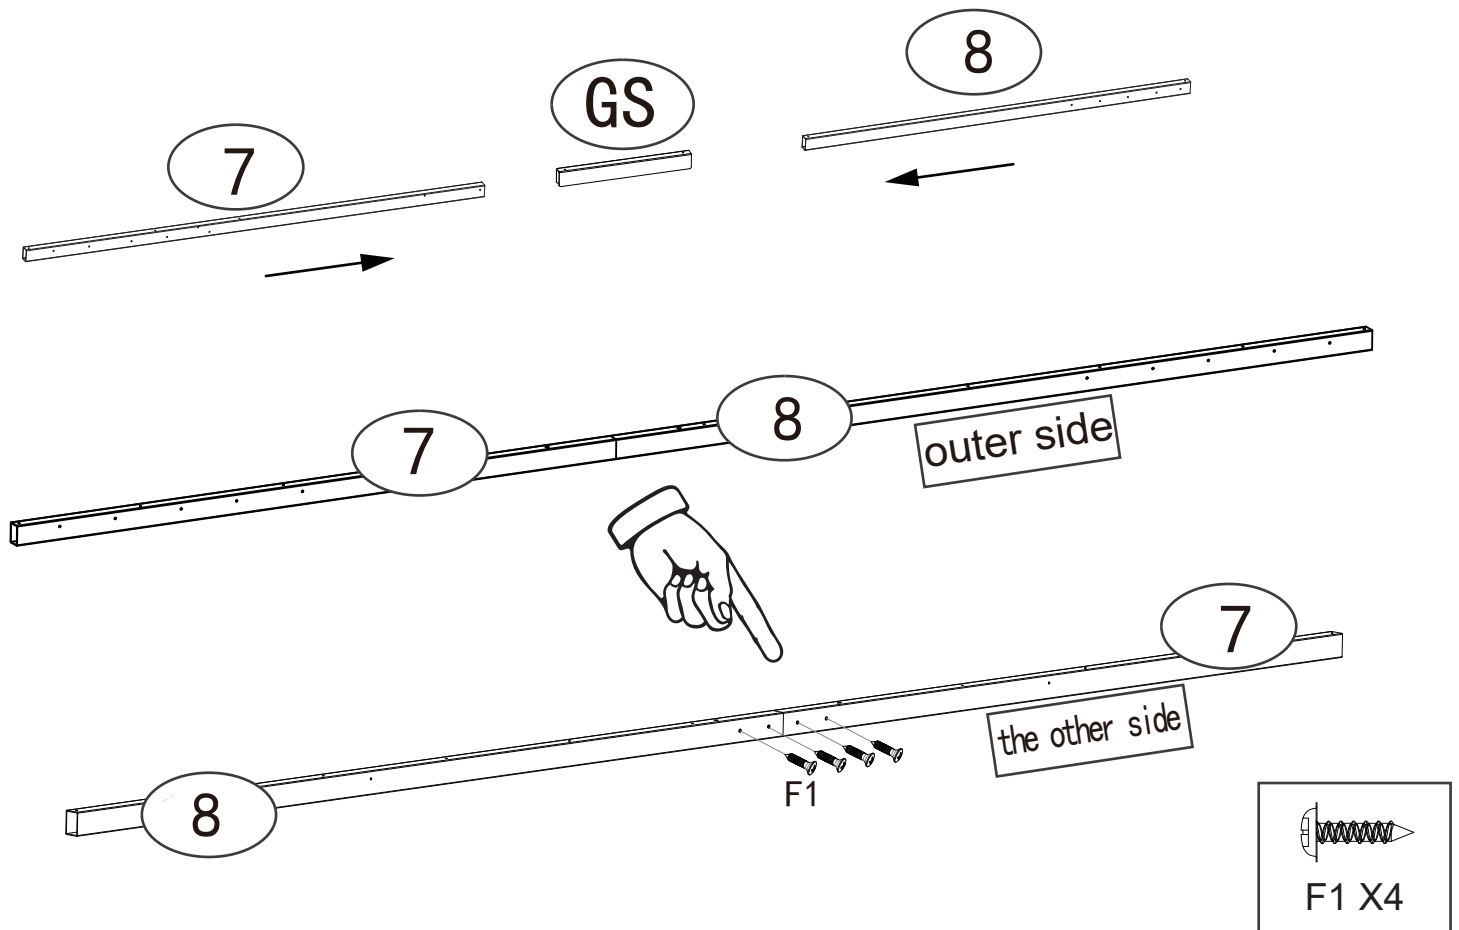


STEP 14

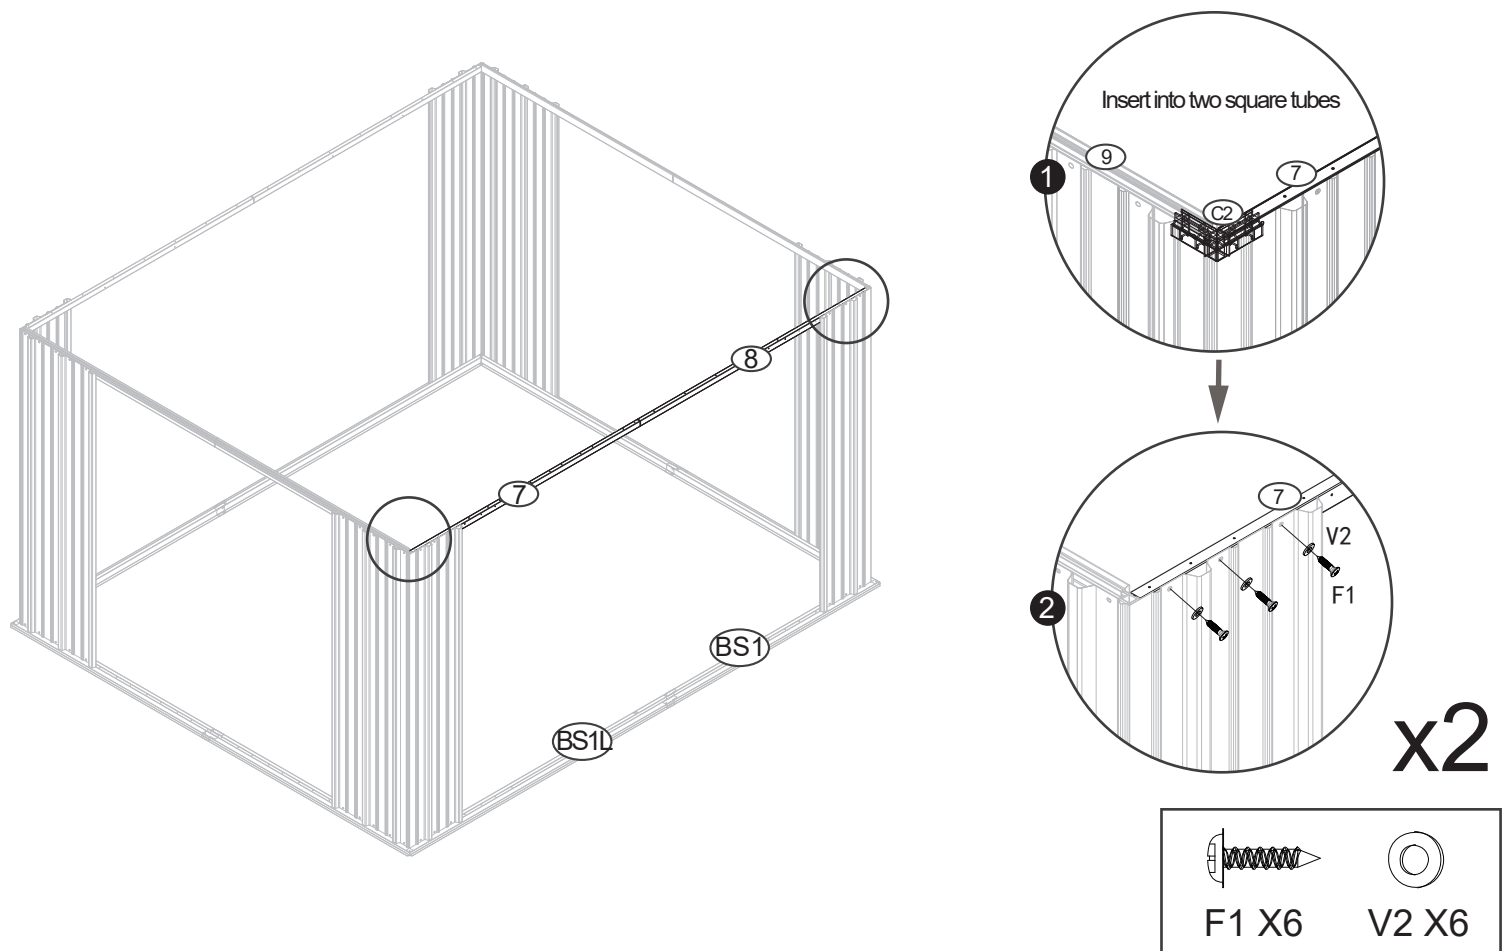



STEP 15

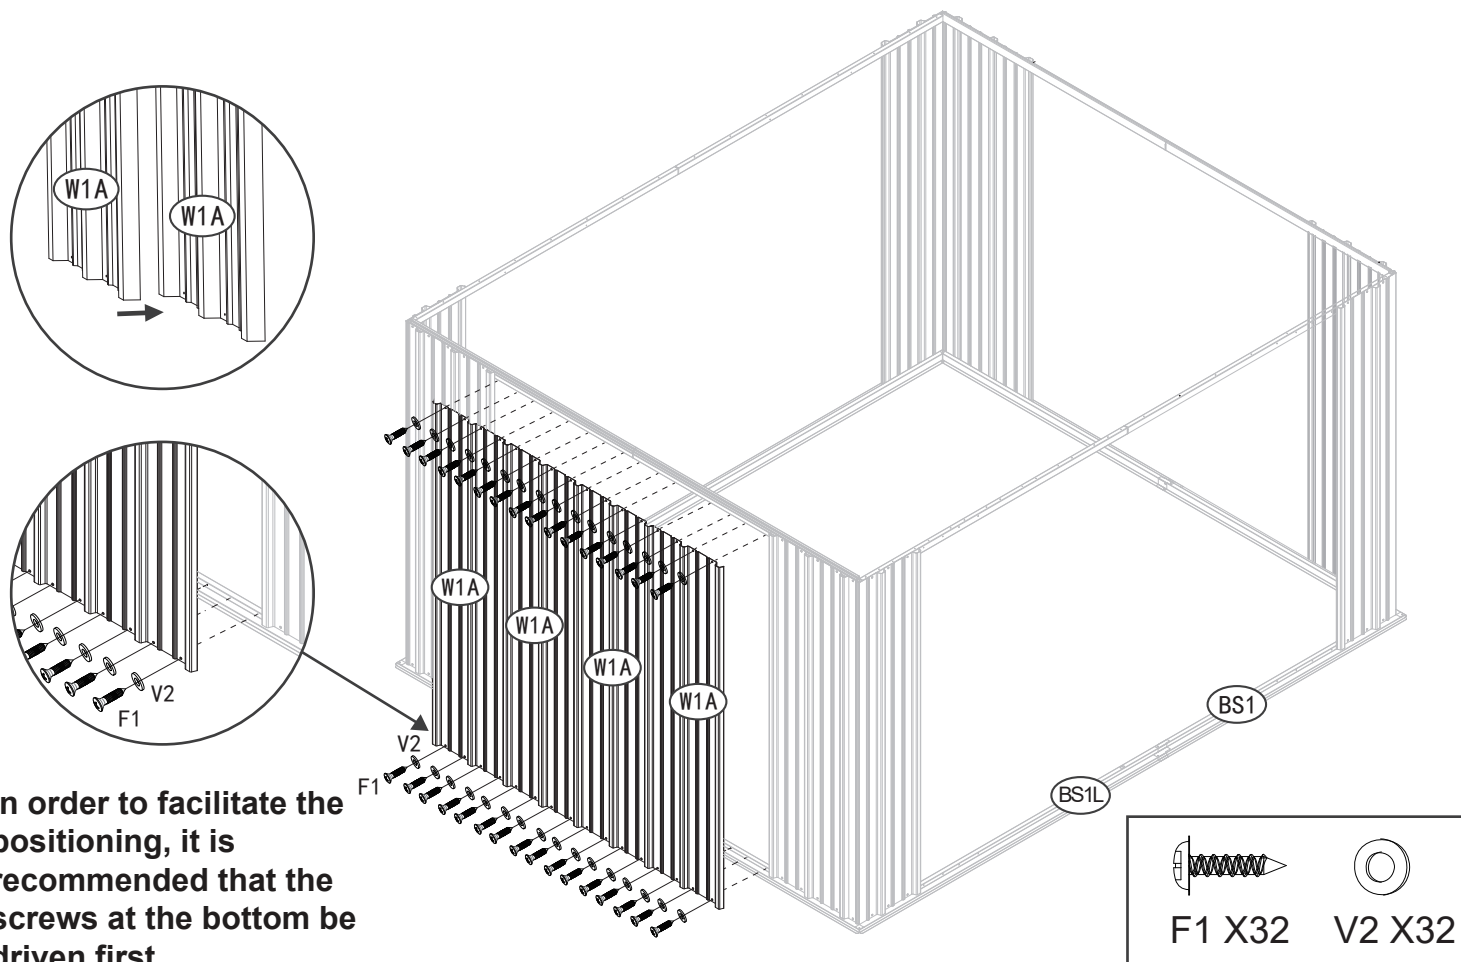



STEP 16

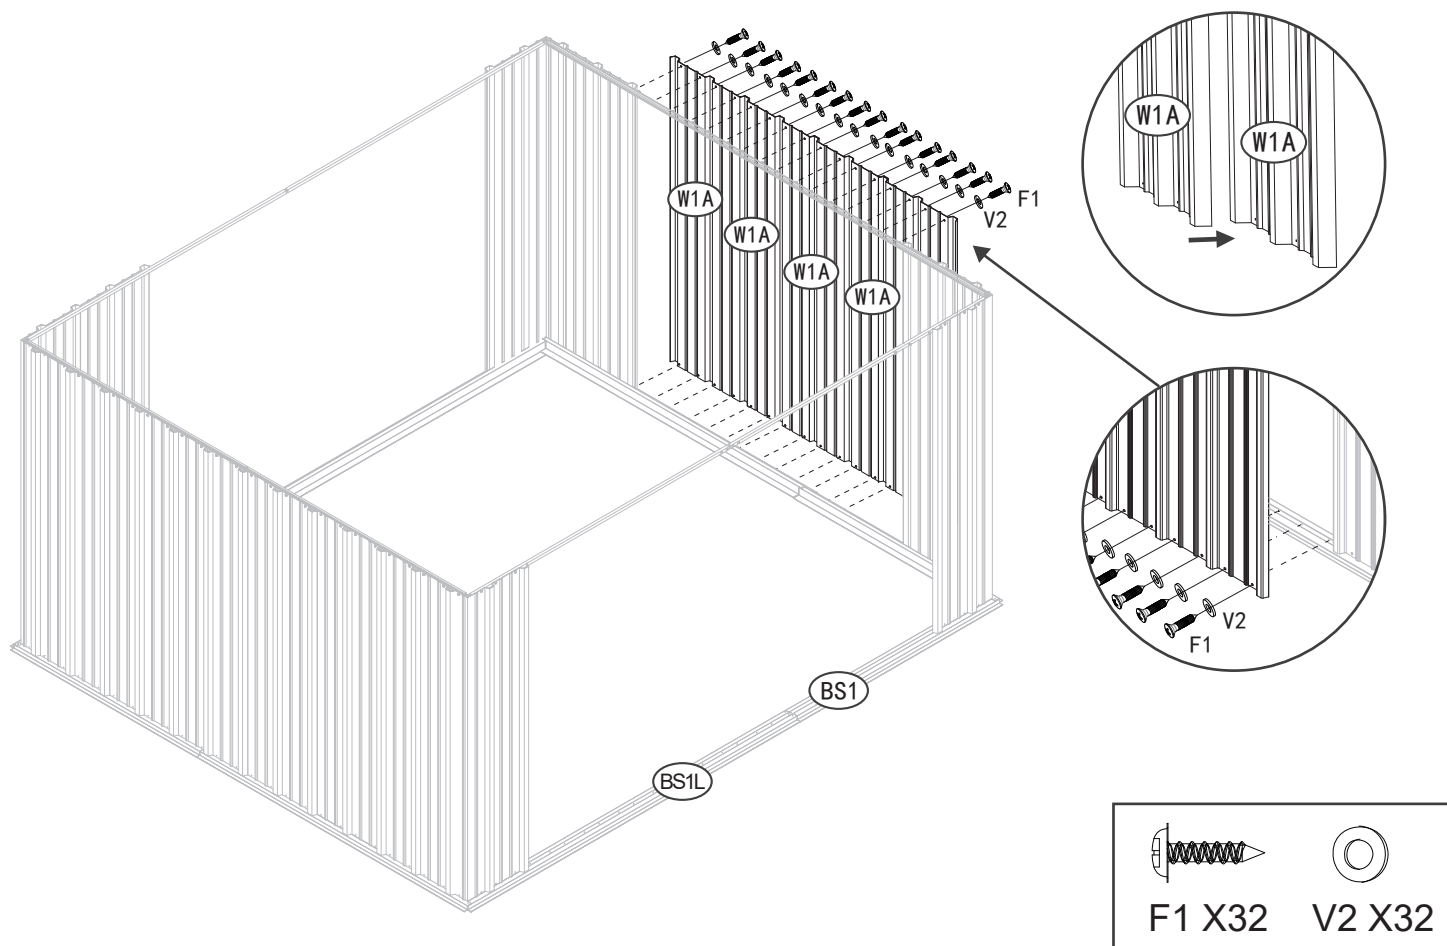


STEP 17

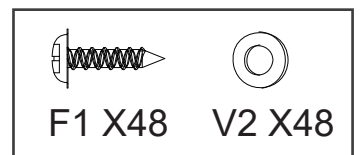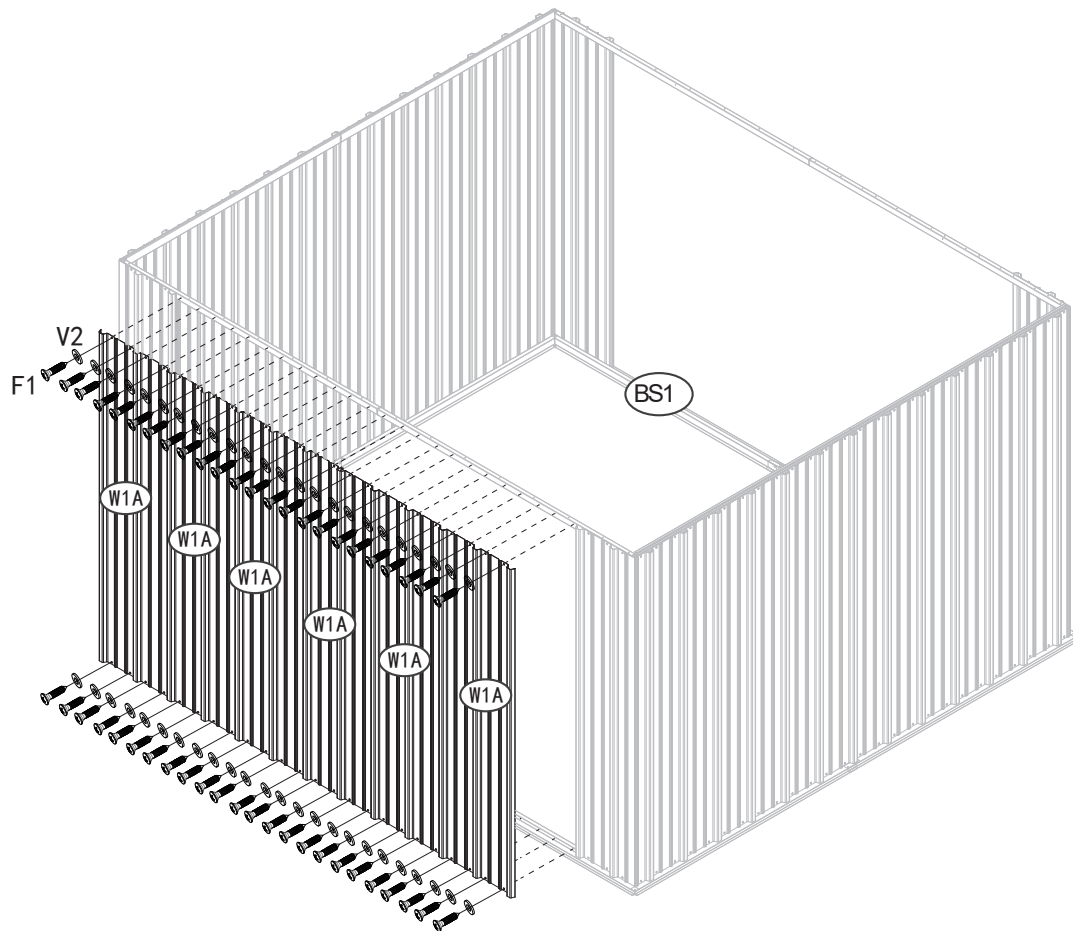


STEP 18

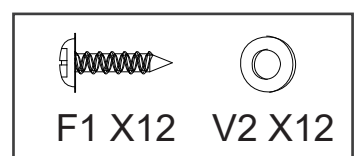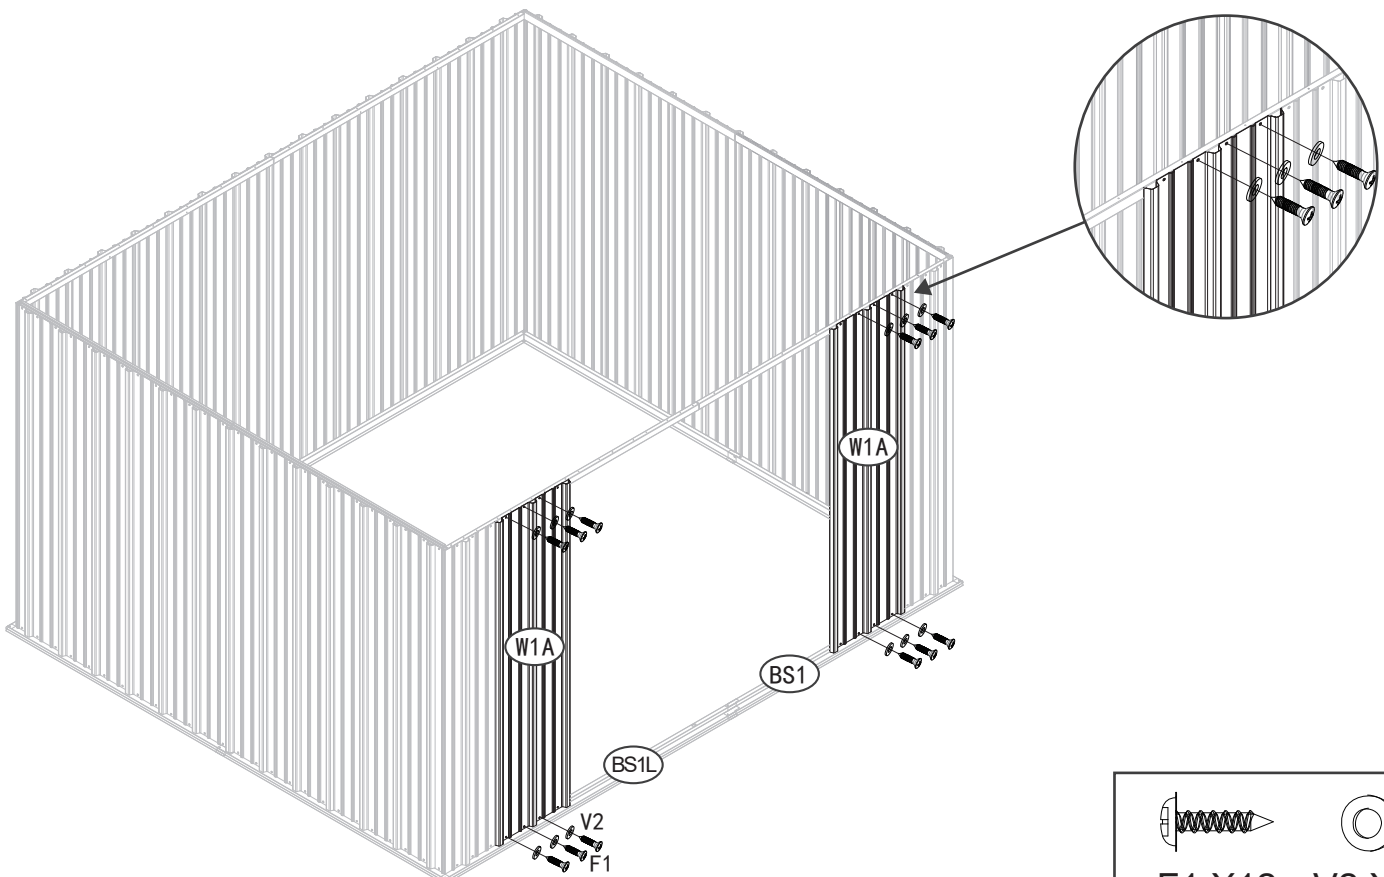


STEP 19

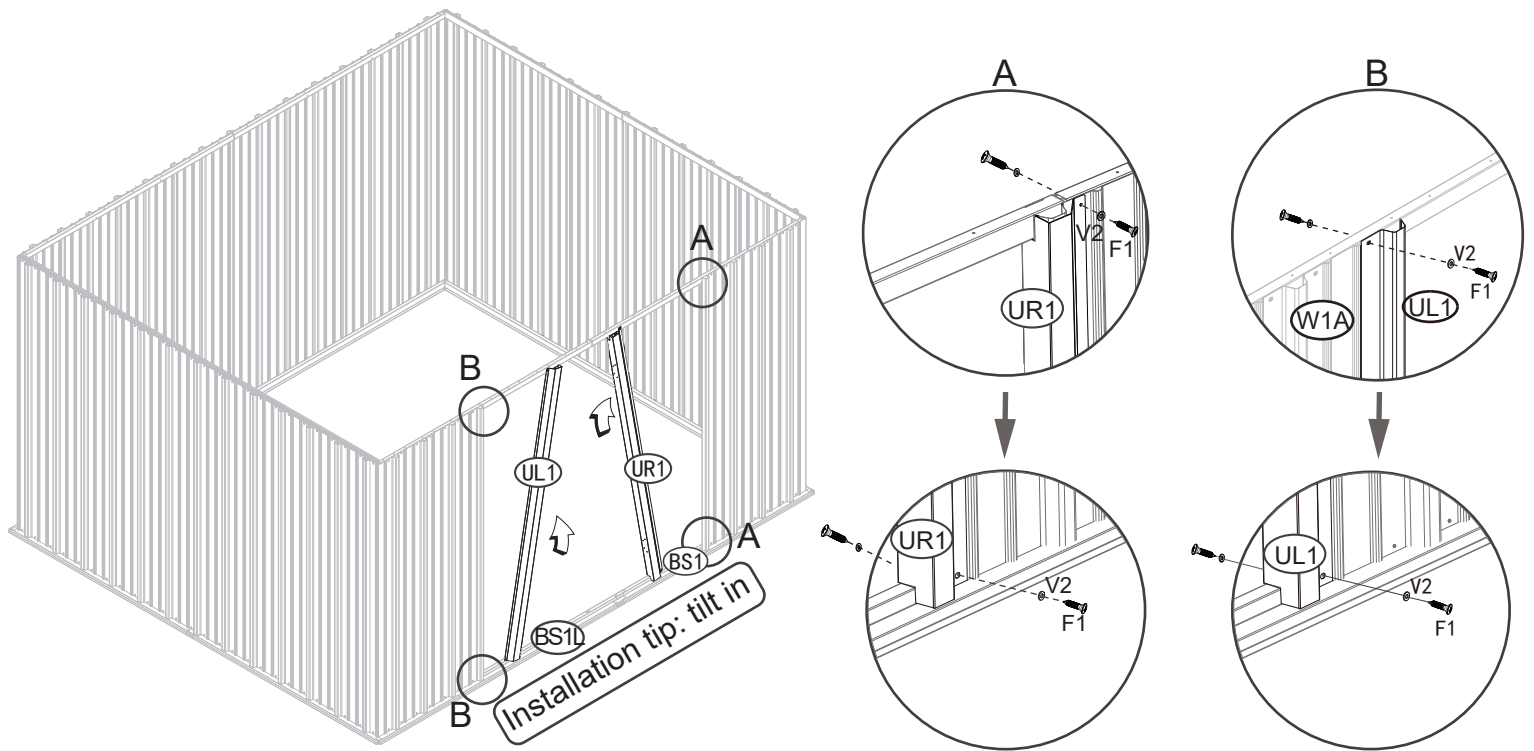



Tips: Insert UL1 and UR1 between the top beam and bottom frame respectively, and then push them to the corresponding position.

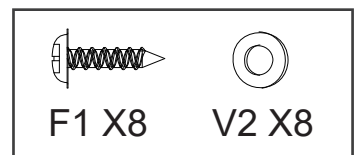


STEP 20

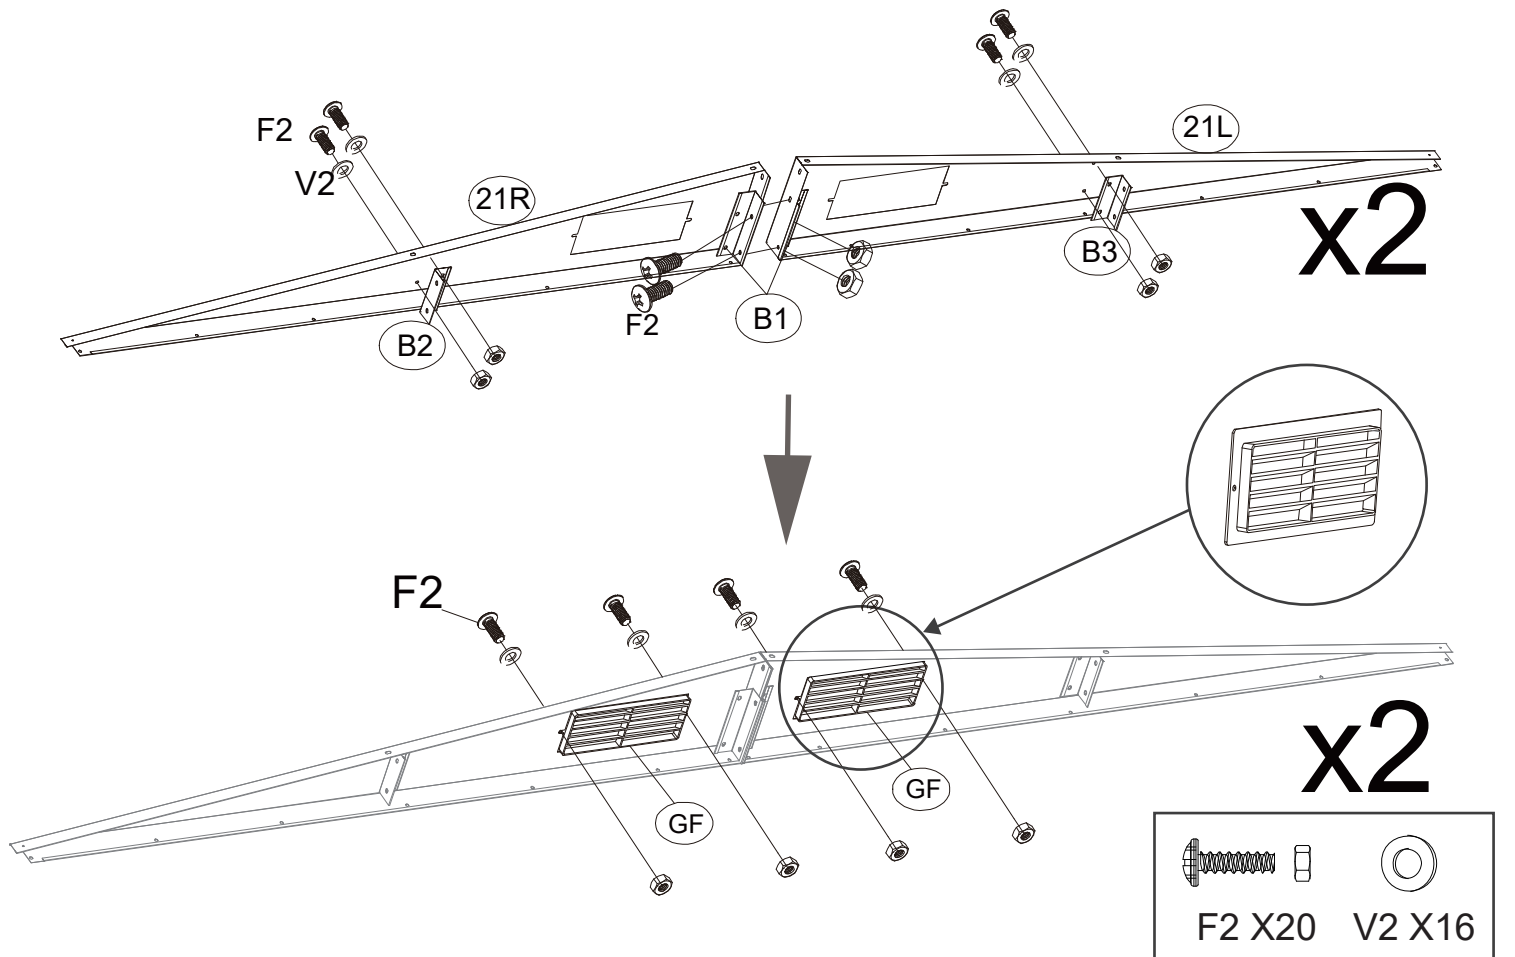

STEP 21

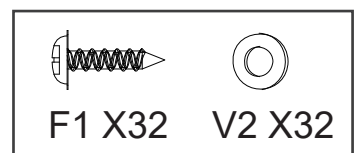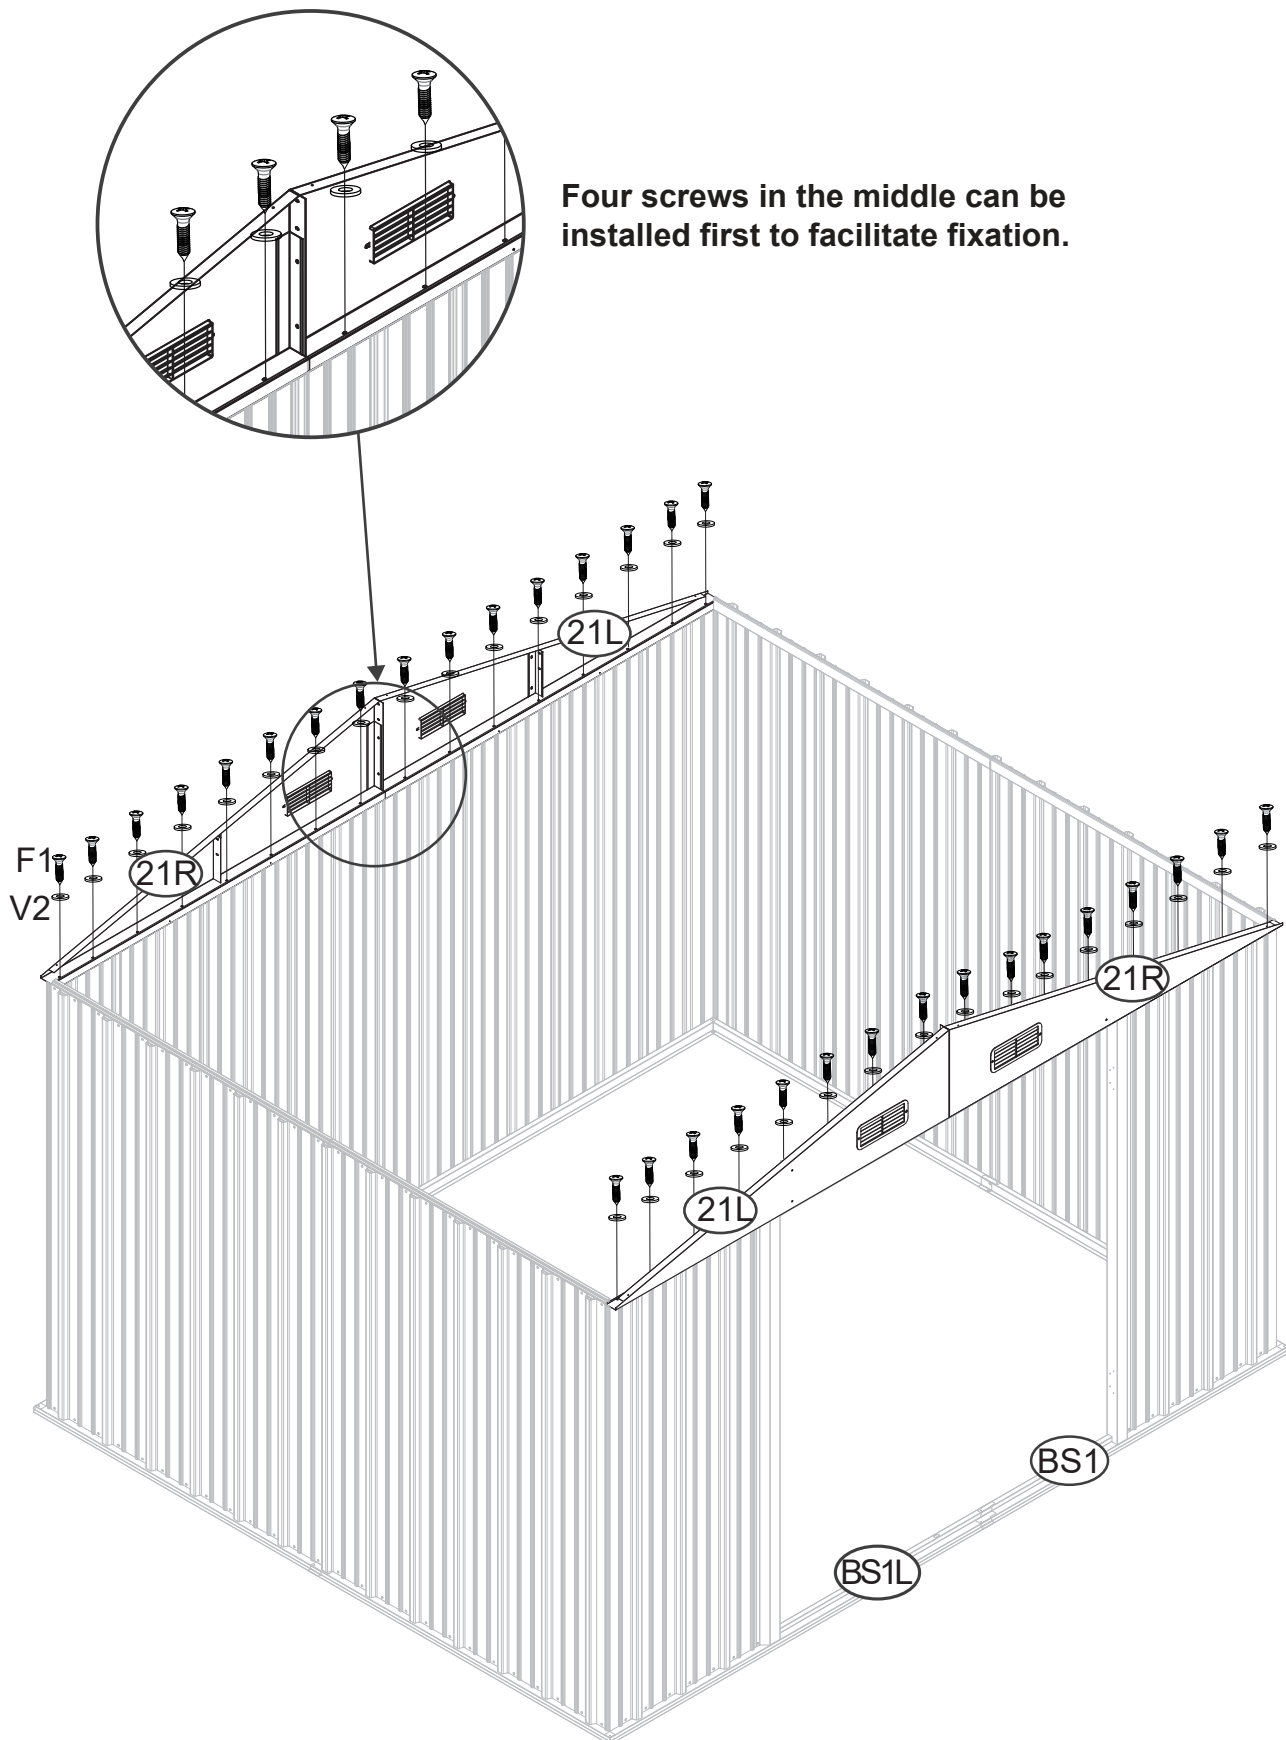


STEP 22

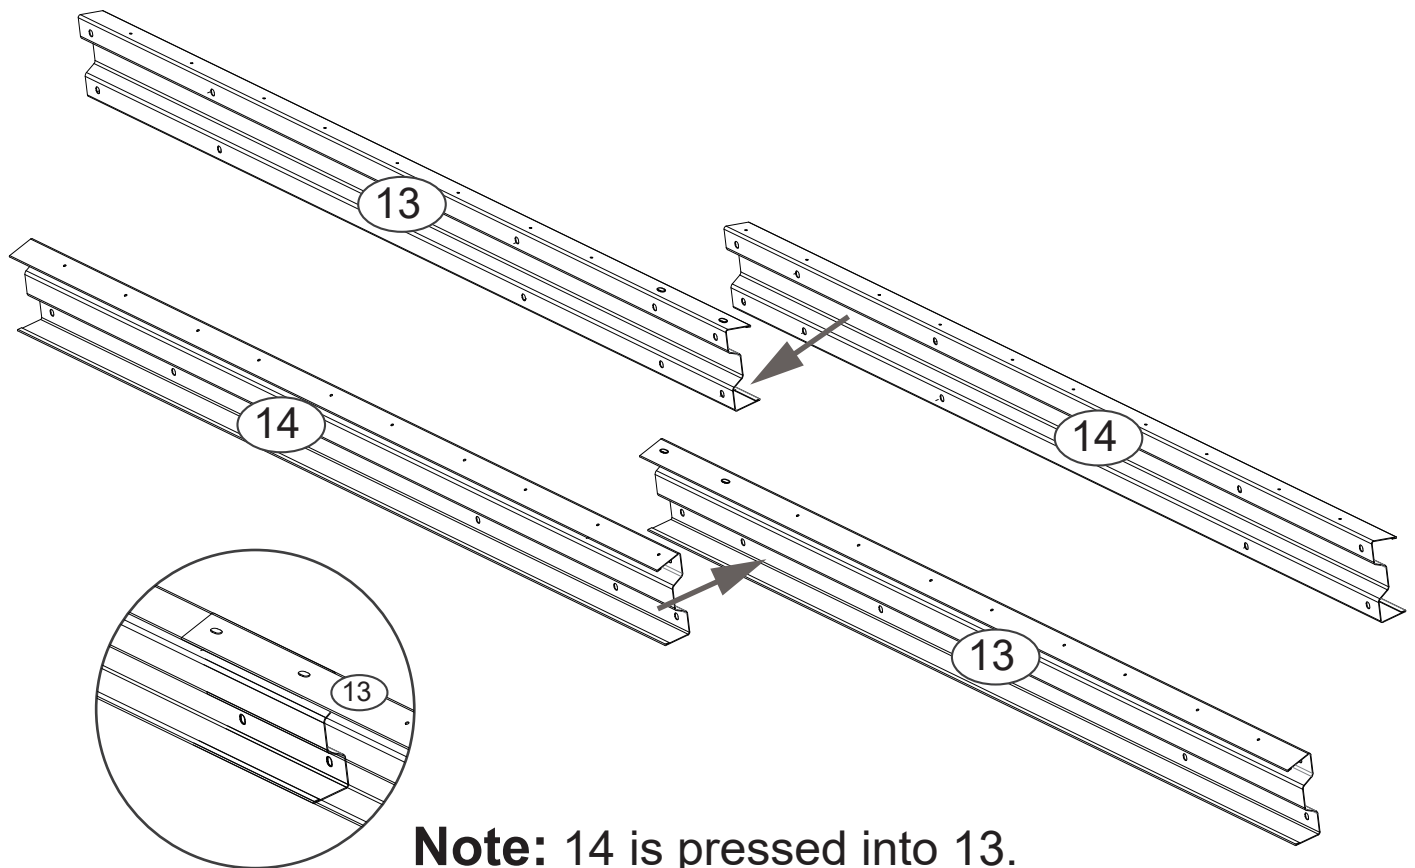

Note: 14 is pressed into 13.

STEP 23

Don't tighten these two screws too tightly.

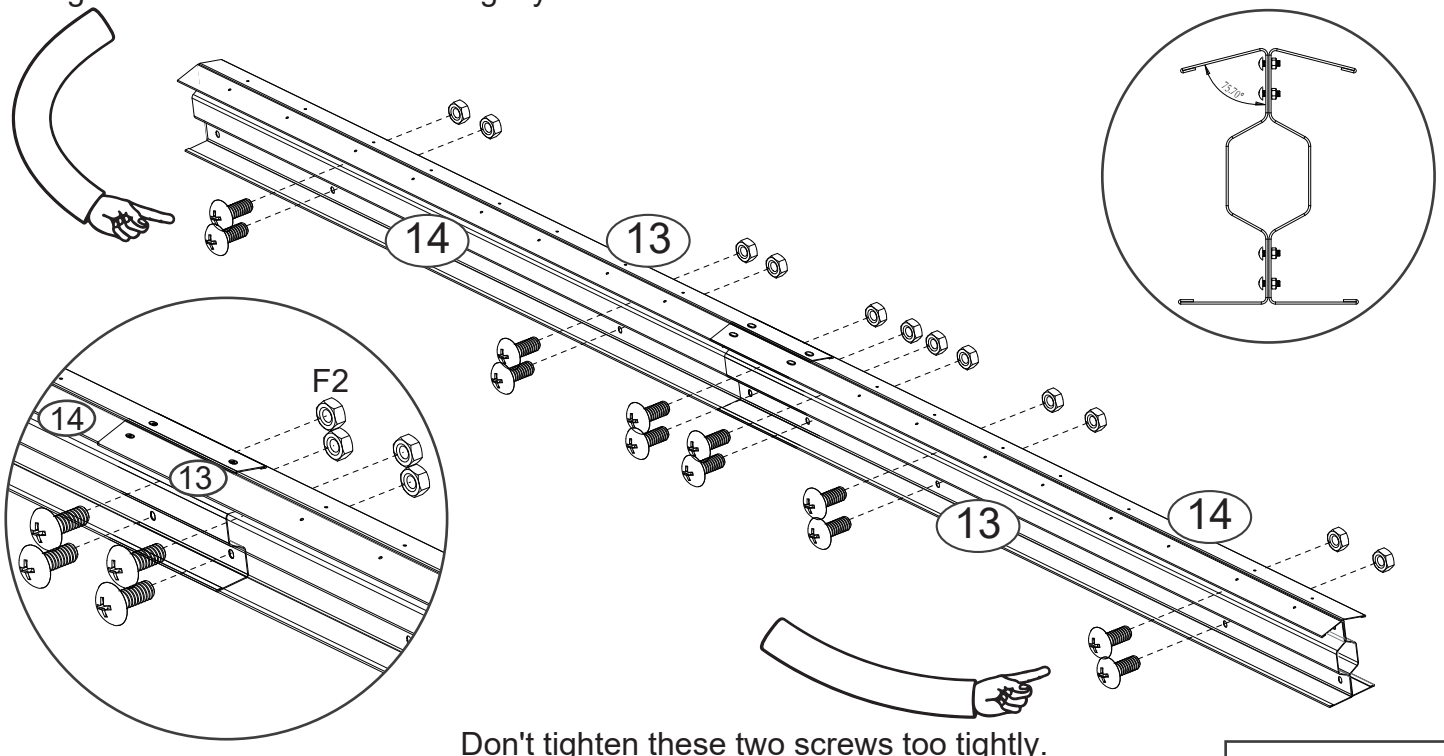


Don't tighten these two screws too tightly.




F2 X12

STEP 24

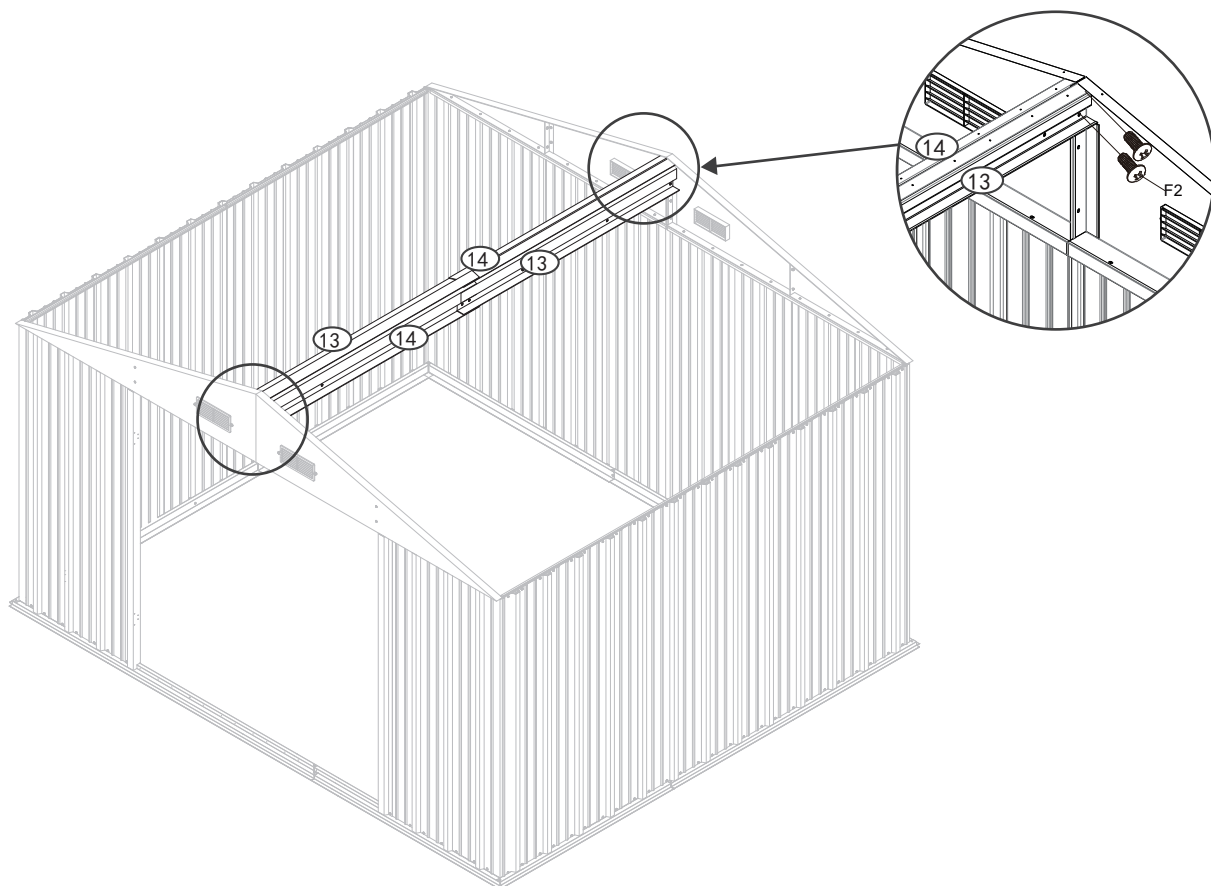


F2 X4

STEP 25


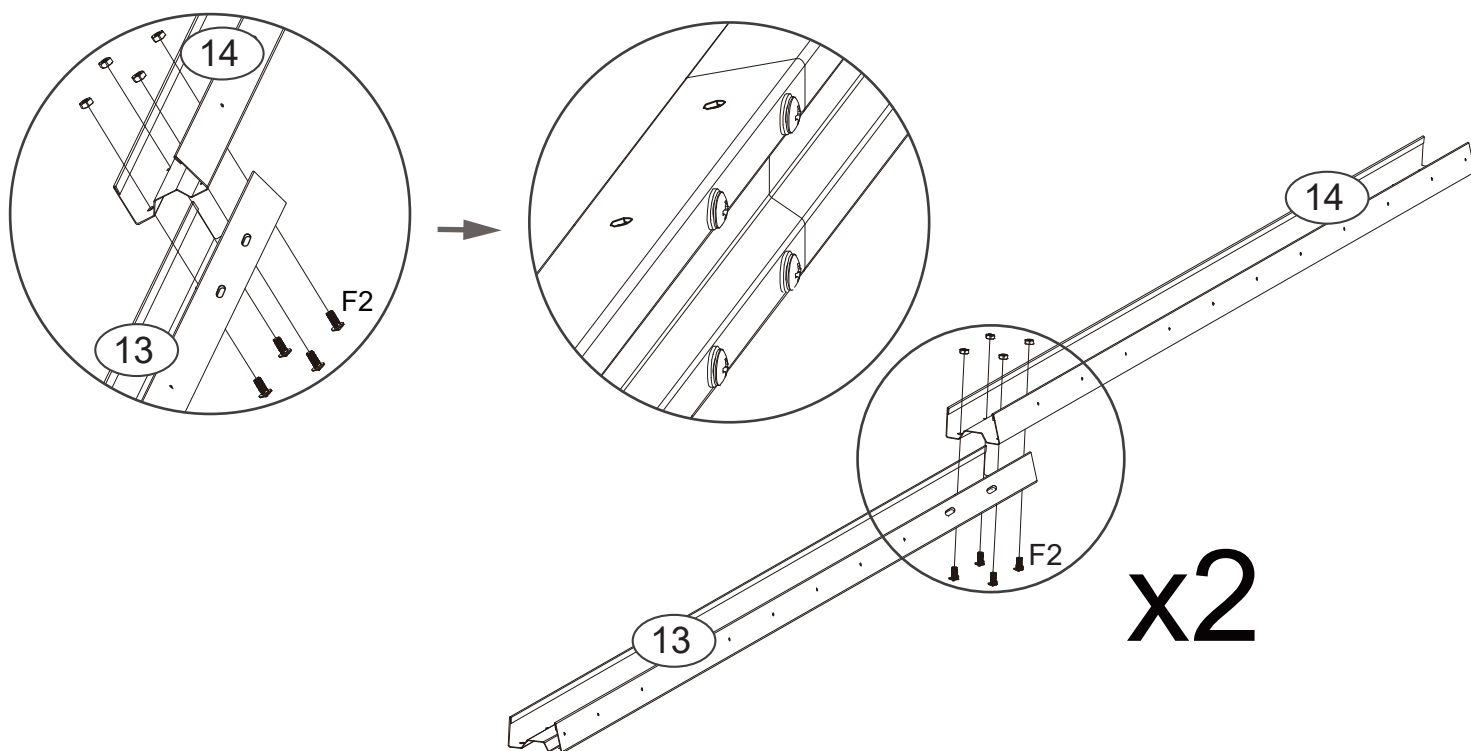


F2 X8

STEP 26


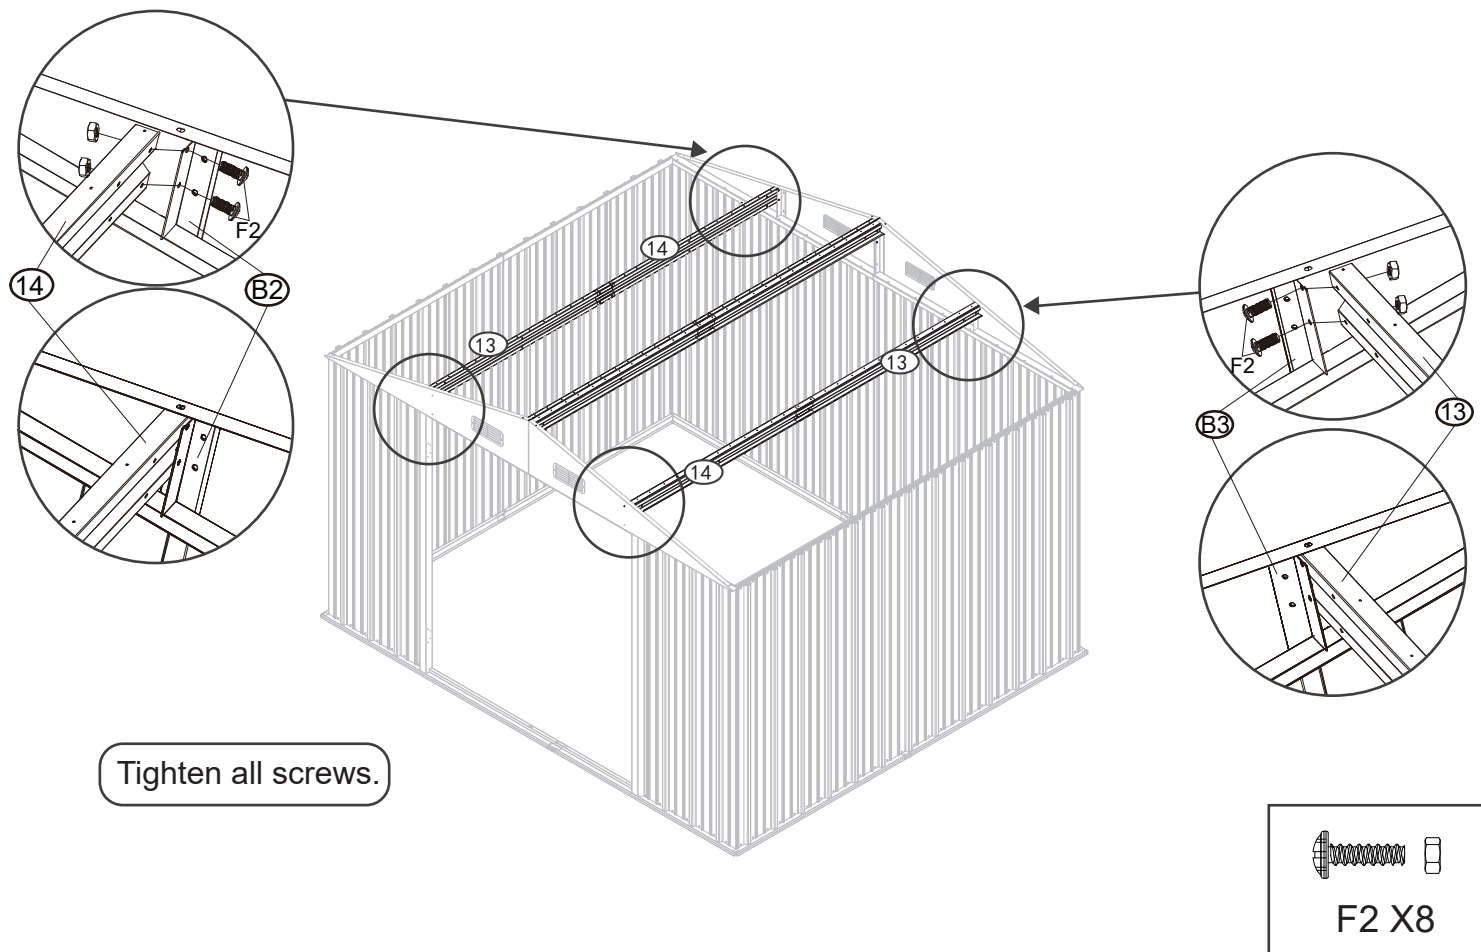


STEP 27

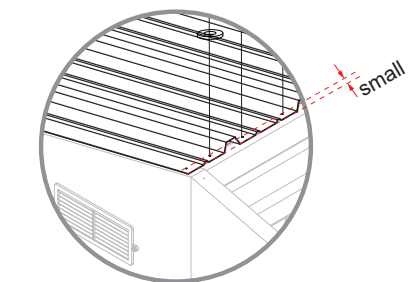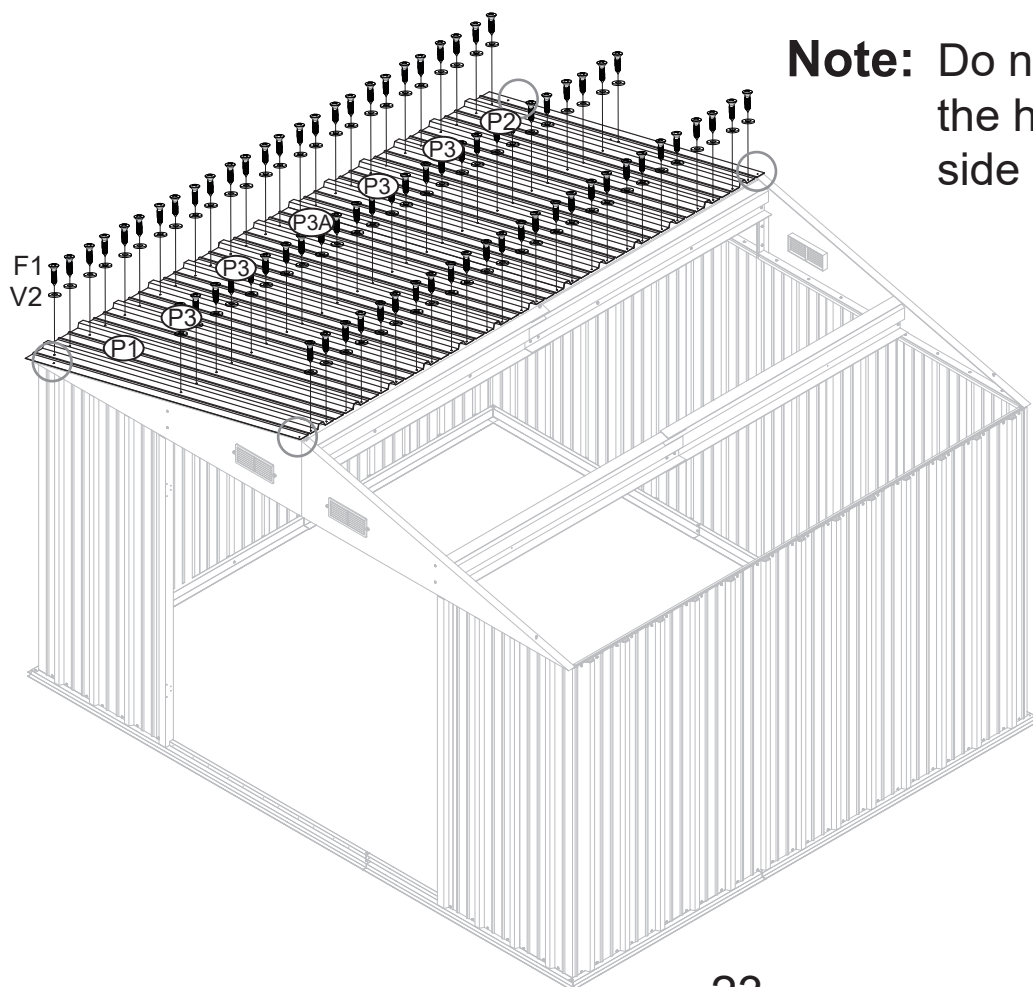


Short distance from the edge at the top.


STEP 28

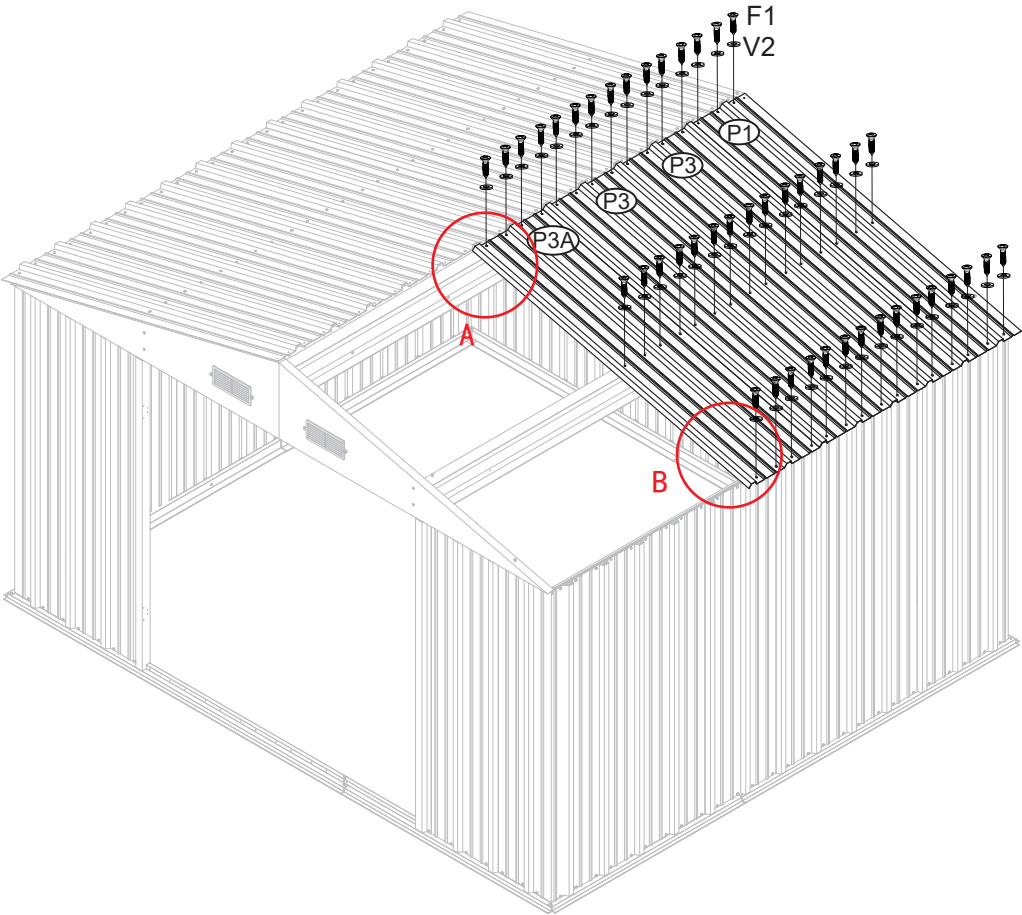



A





B

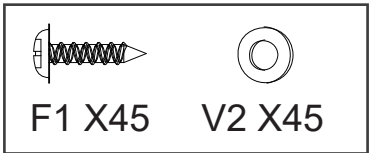

STEP 29

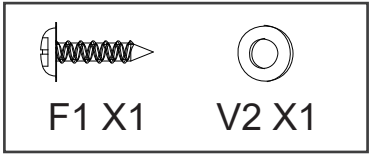
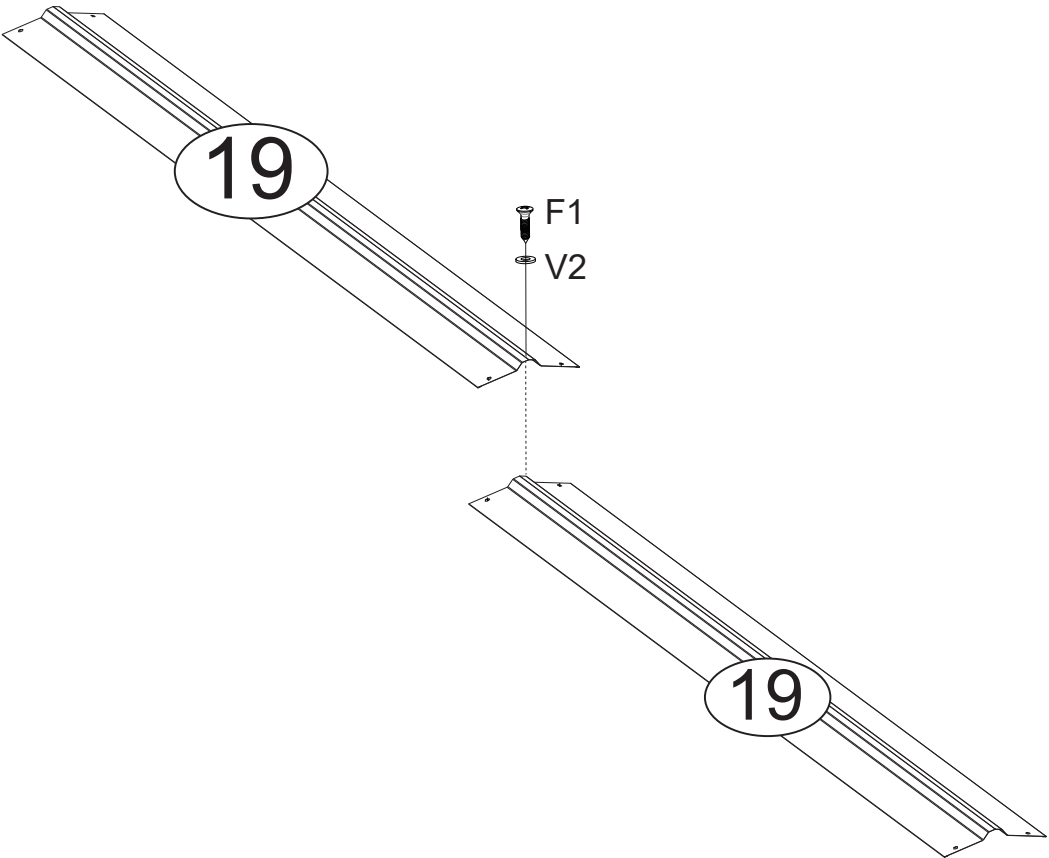


STEP 30

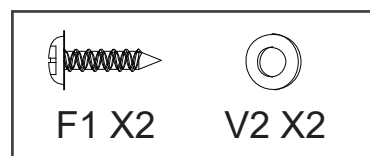
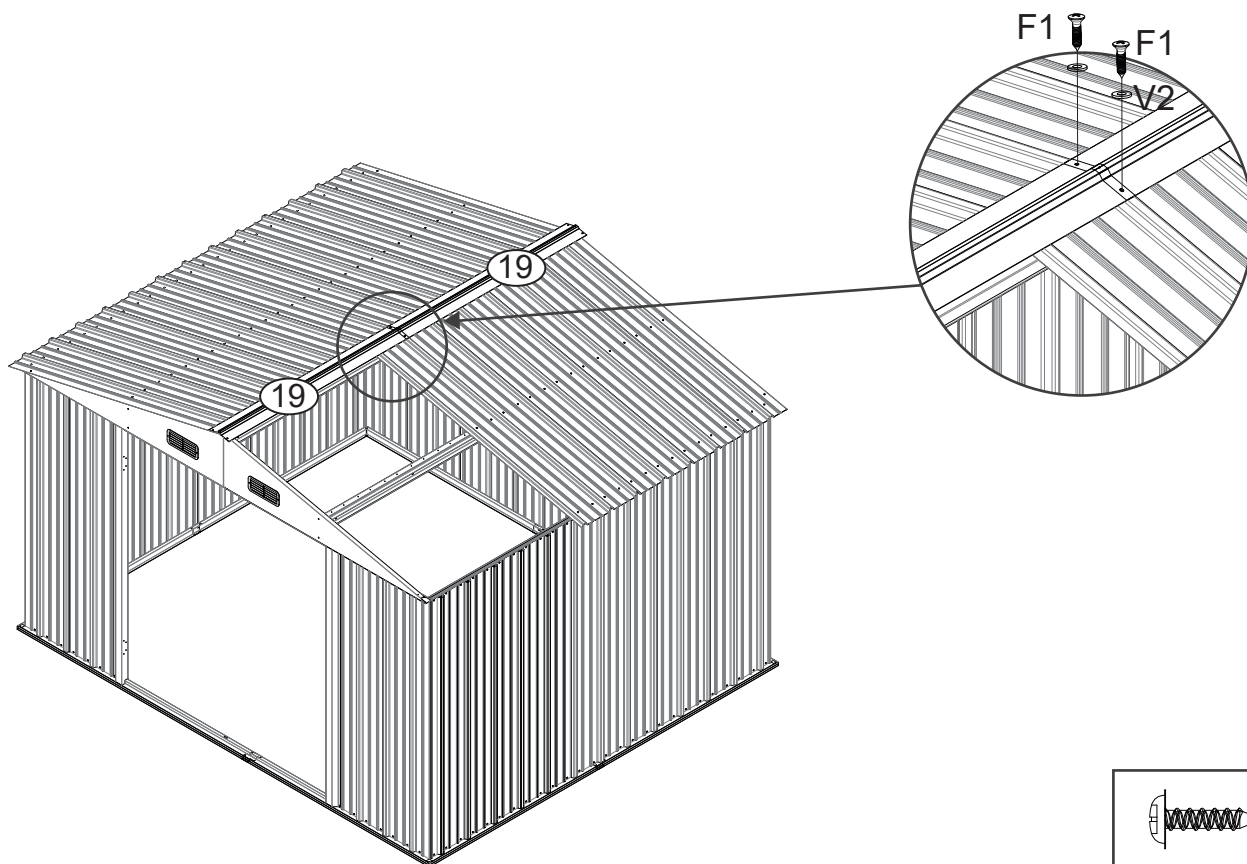


STEP 31


Installation tips: You need to gently lift the 19 and then screw it.

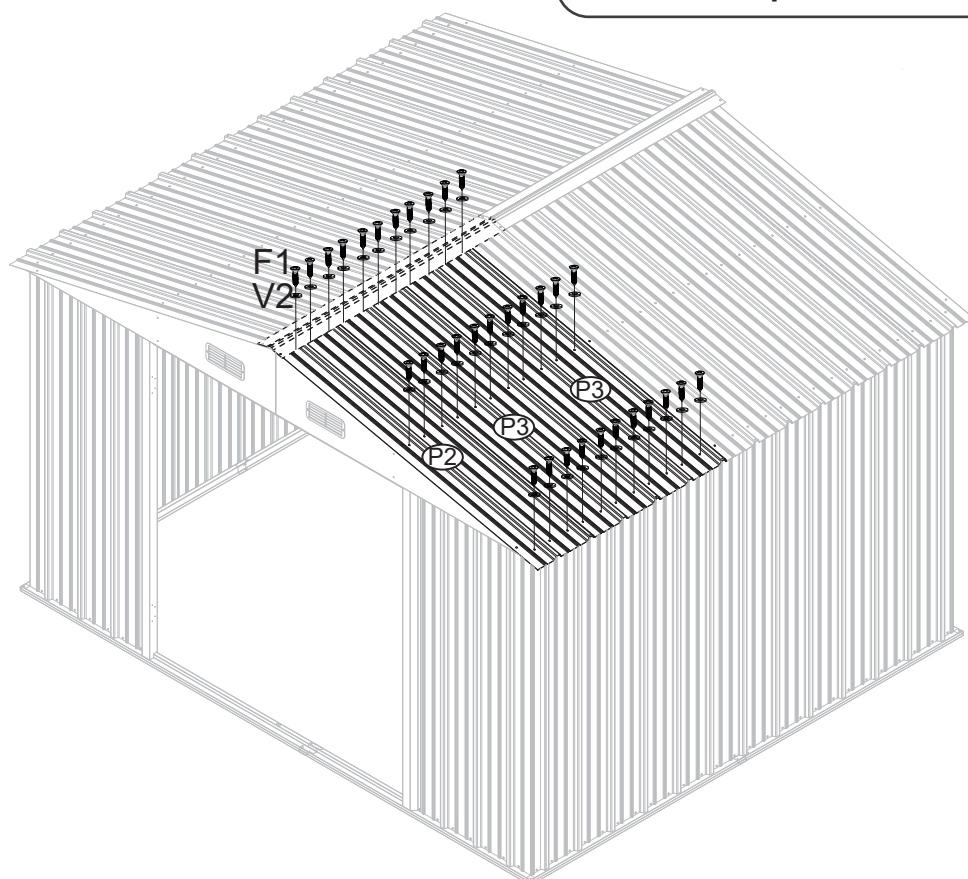



STEP 32

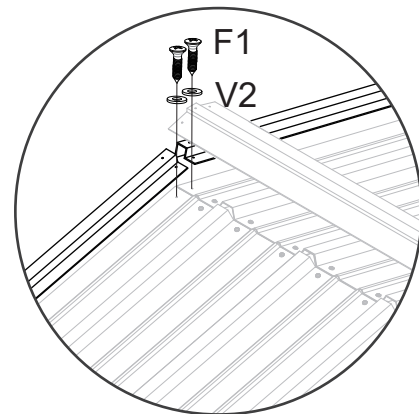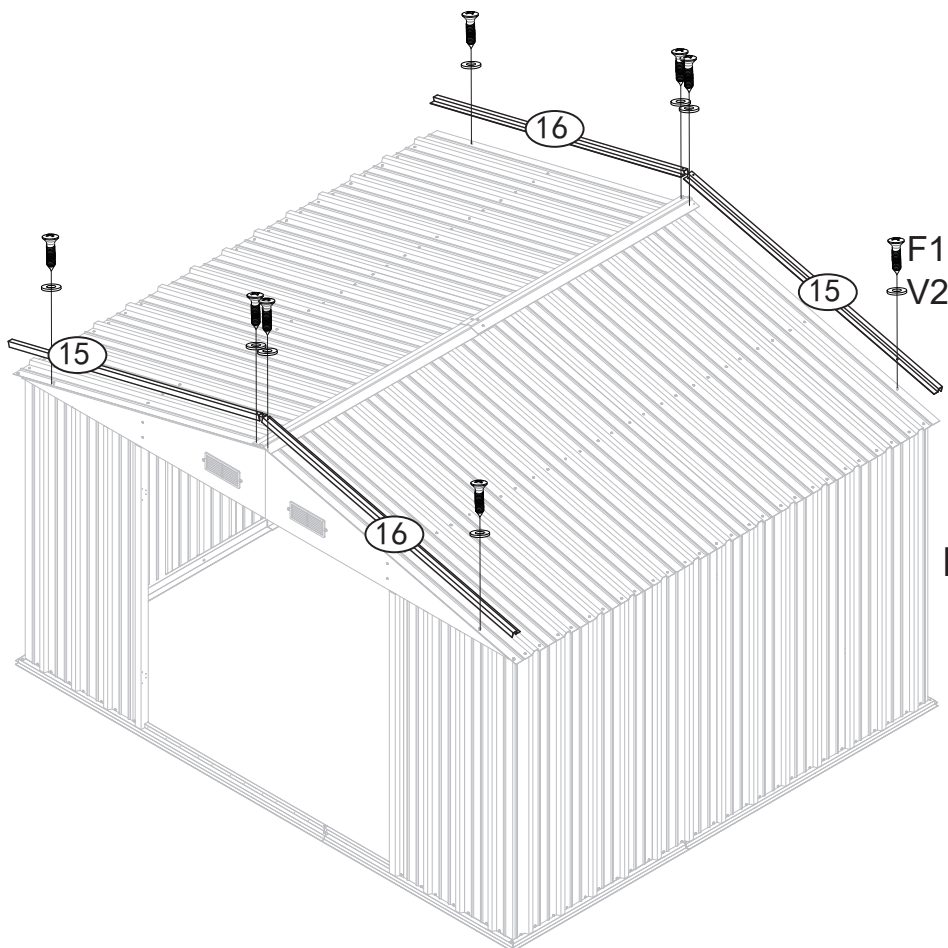


Note: Do not install F1 and V2 in the holes near the outer side of P1,P2.




STEP 33

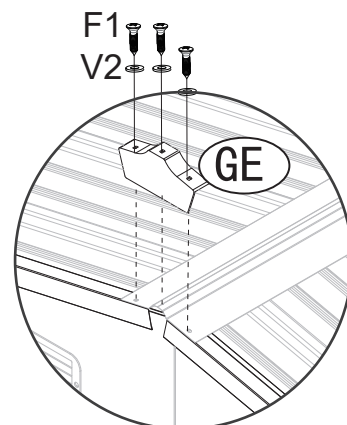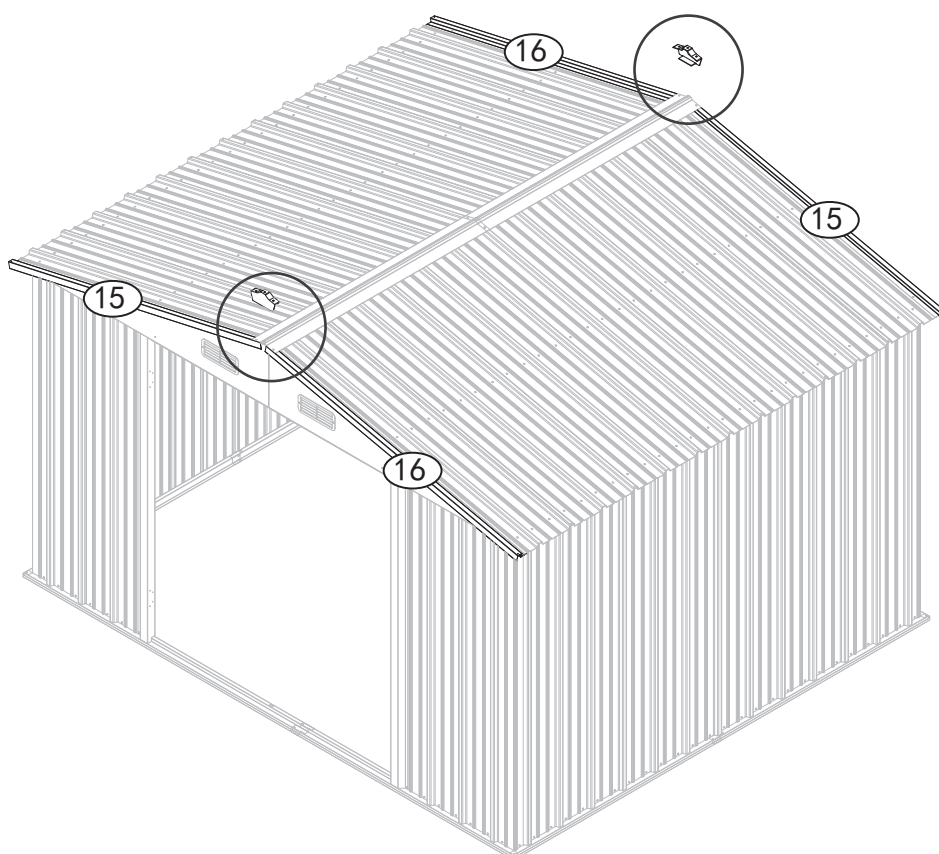


x2





STEP 34

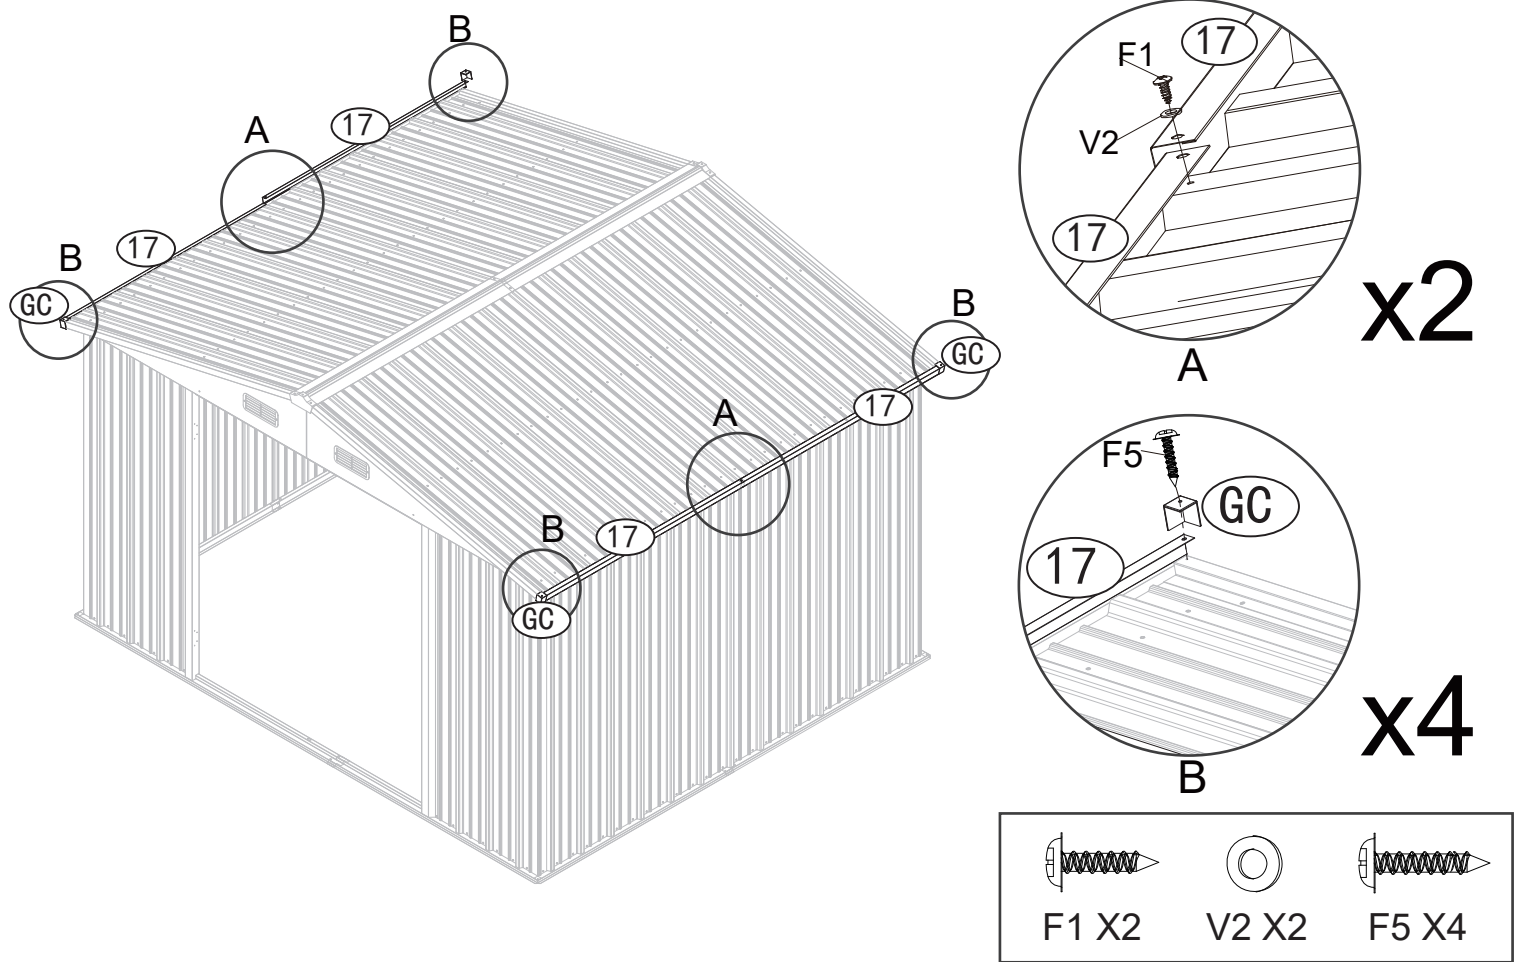



STEP 35

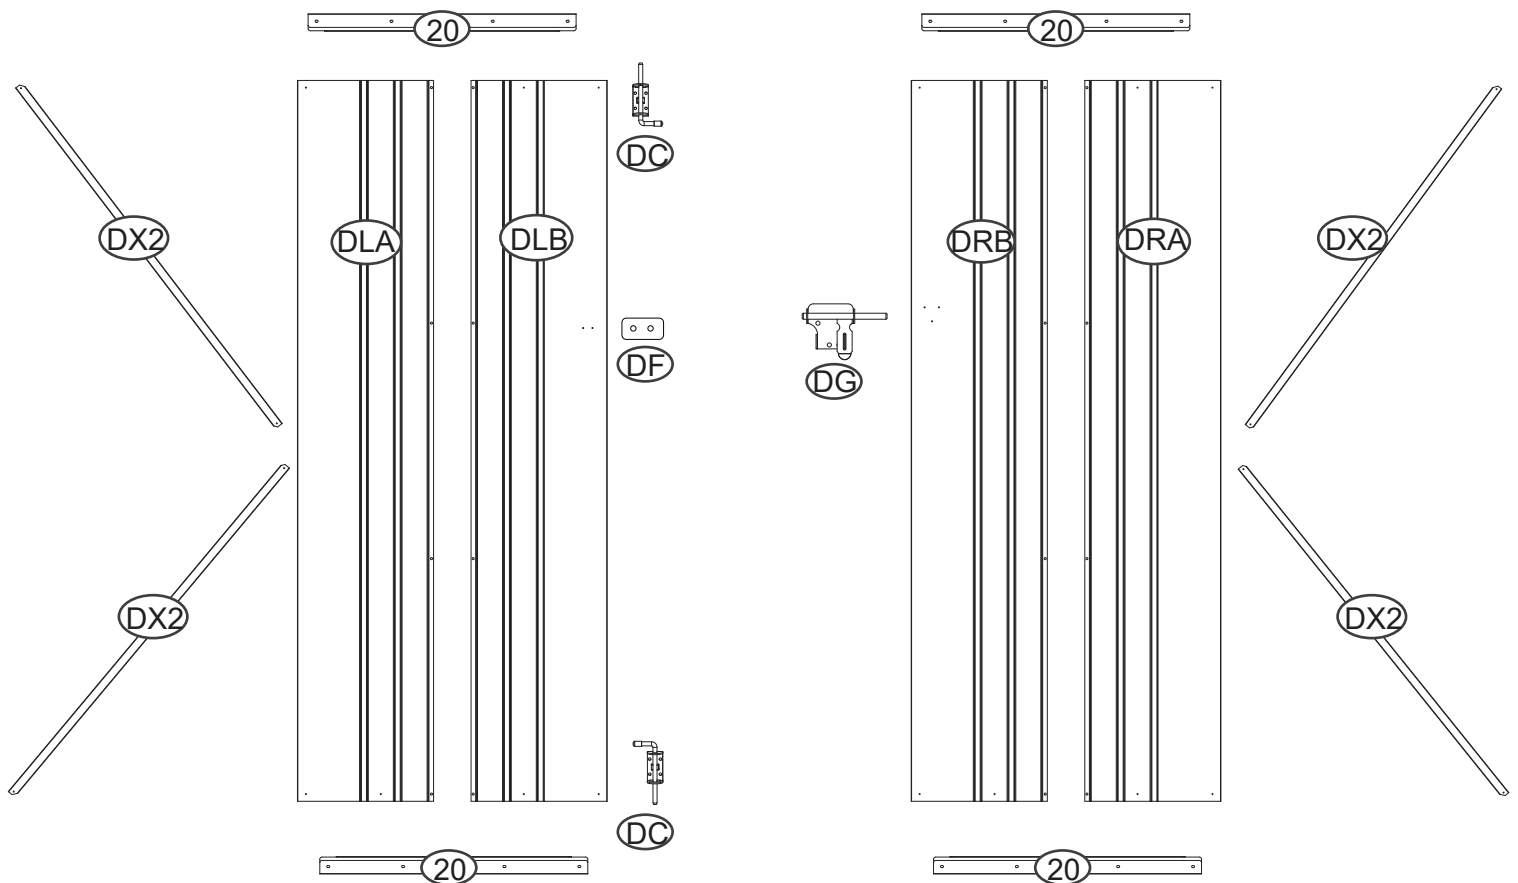


STEP 36

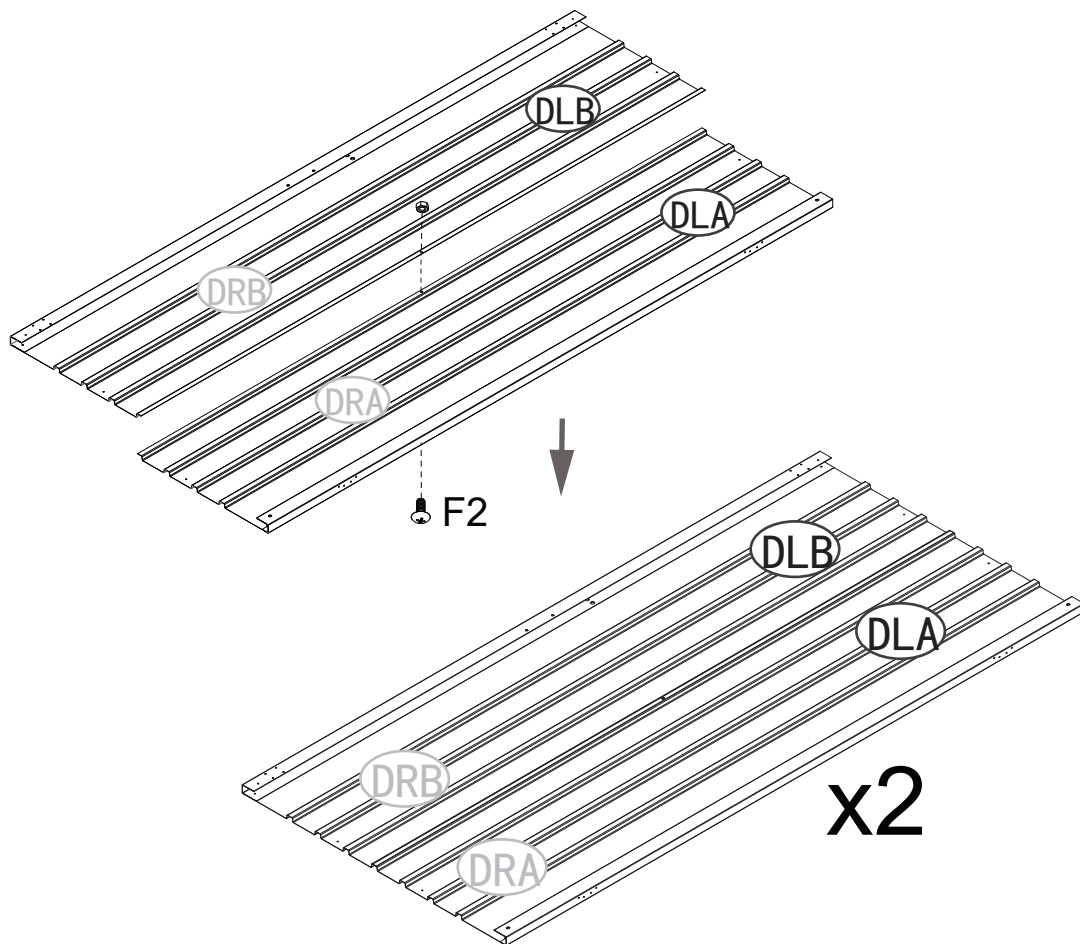


STEP 37

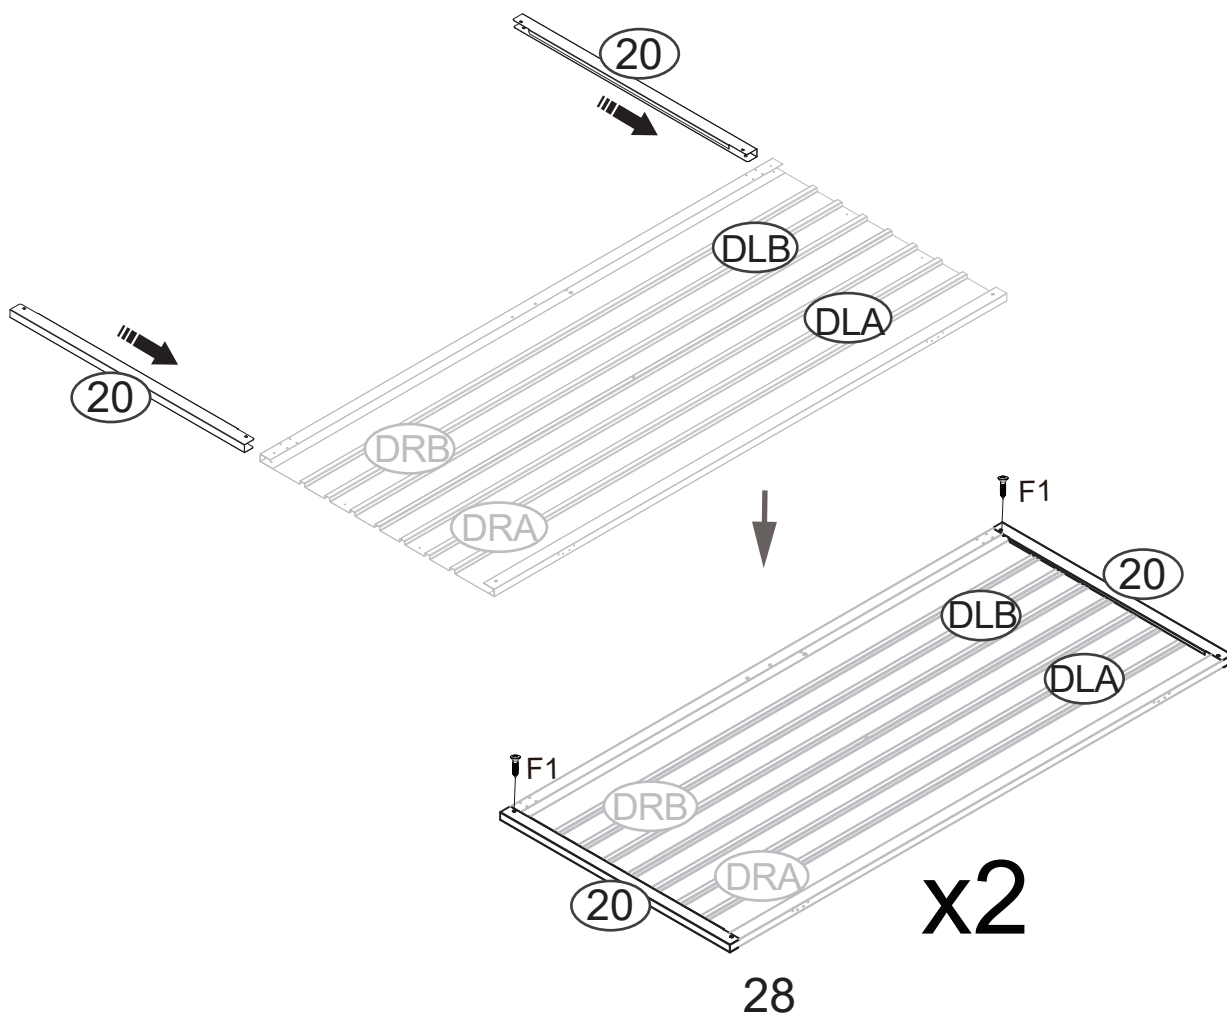





STEP 38

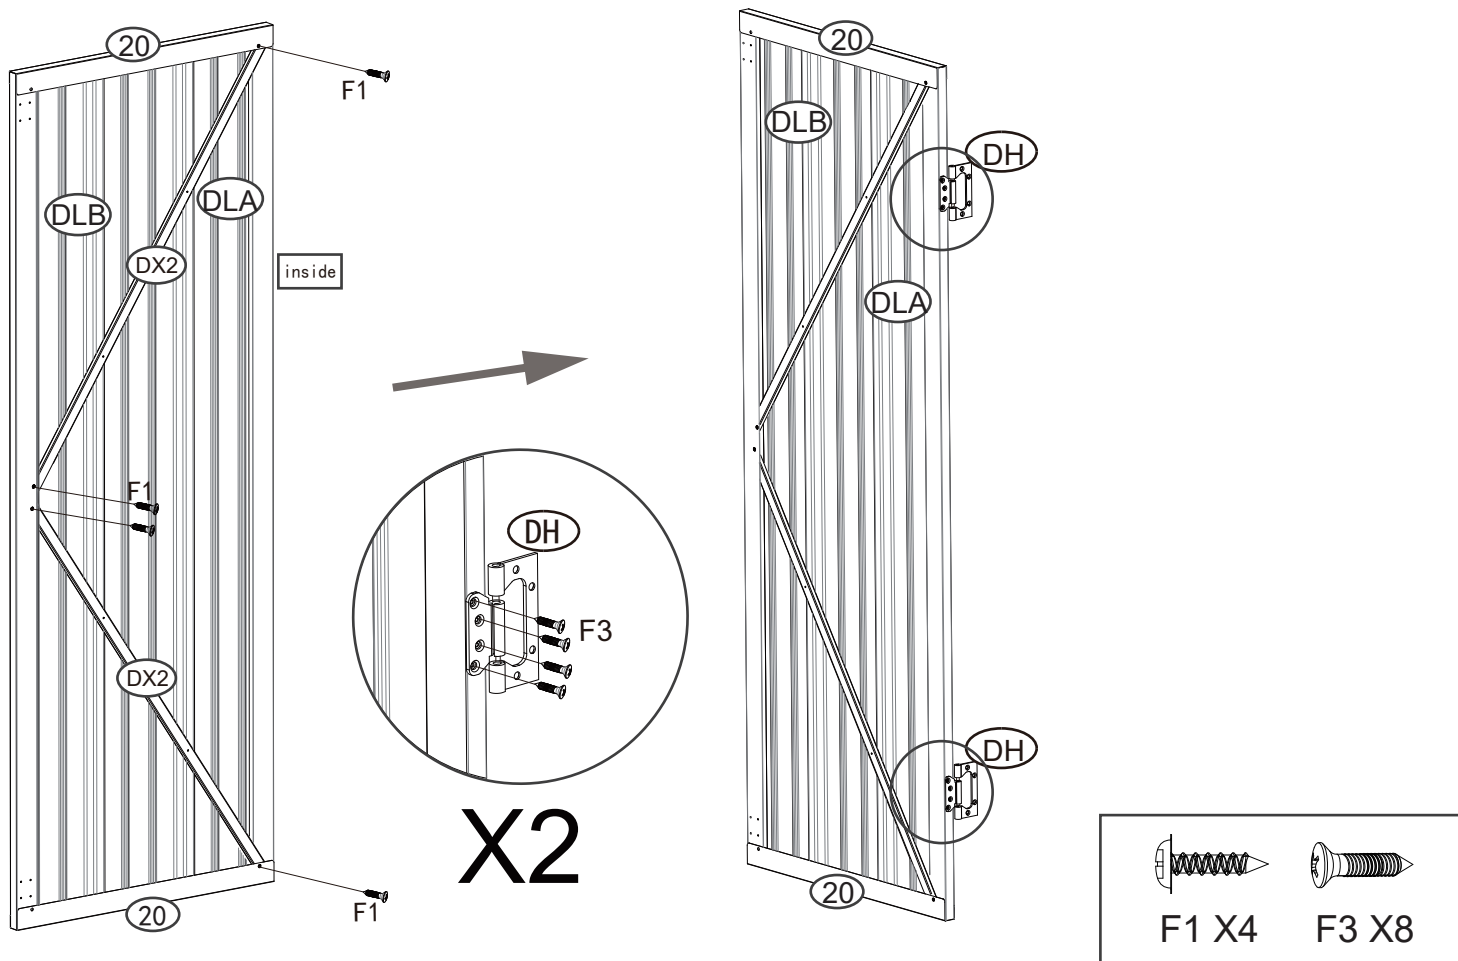

STEP 39


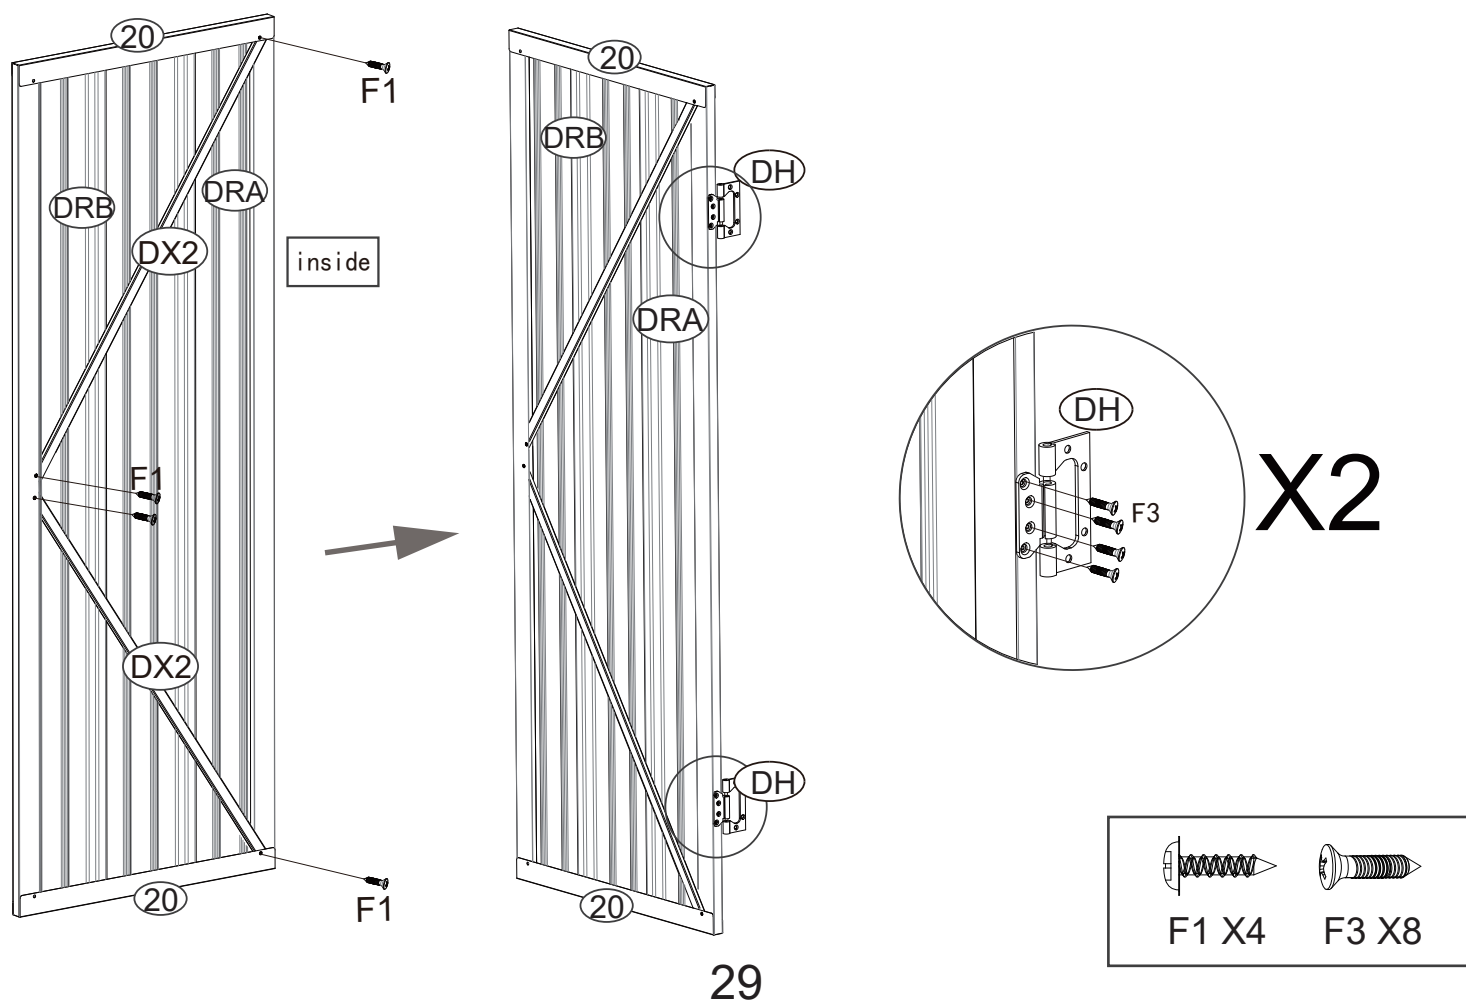


STEP 40

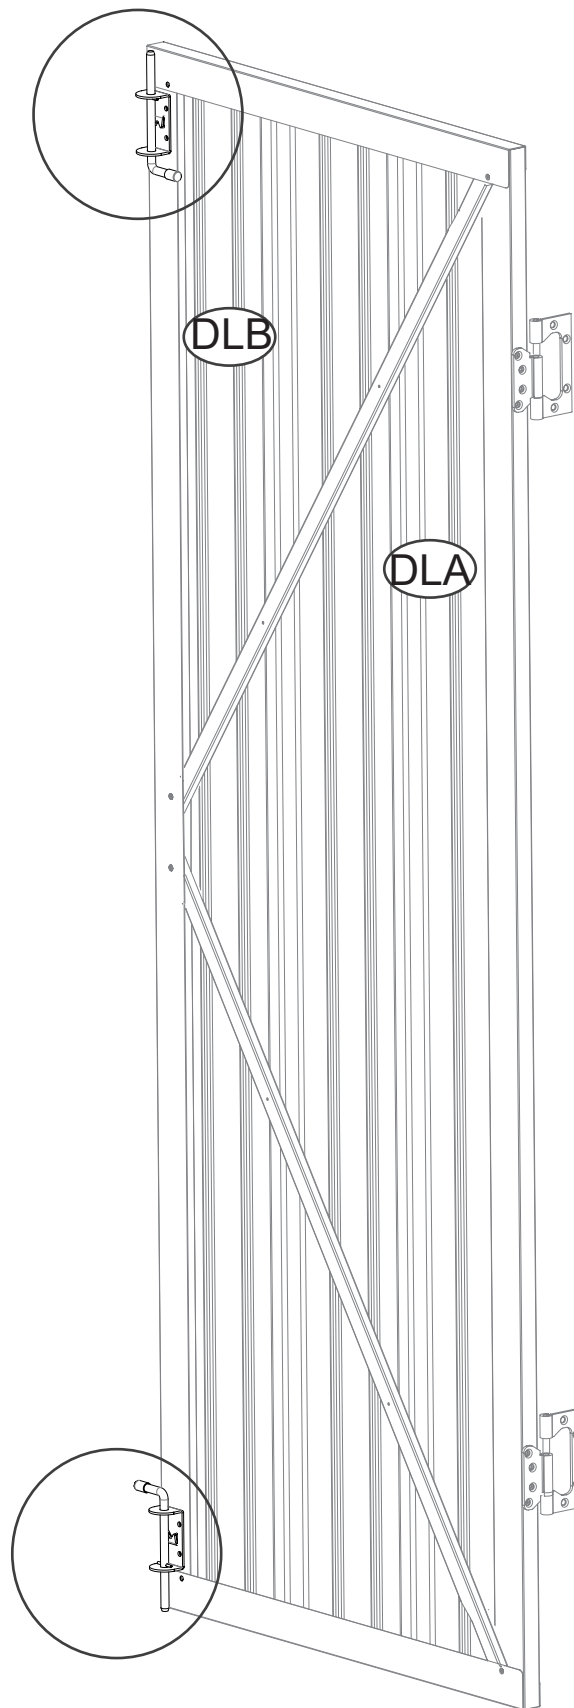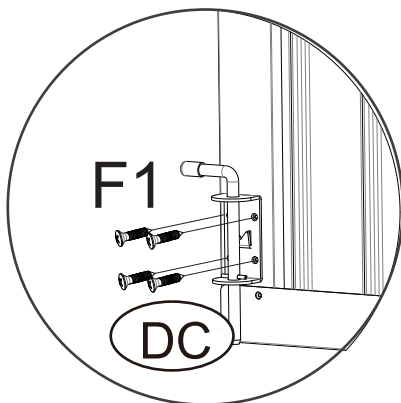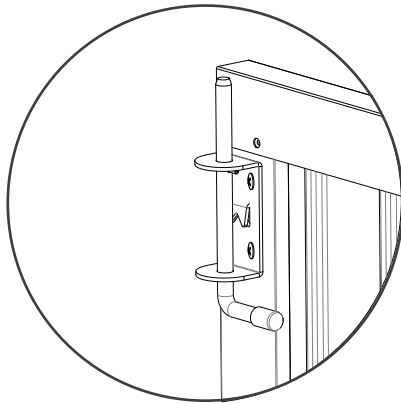
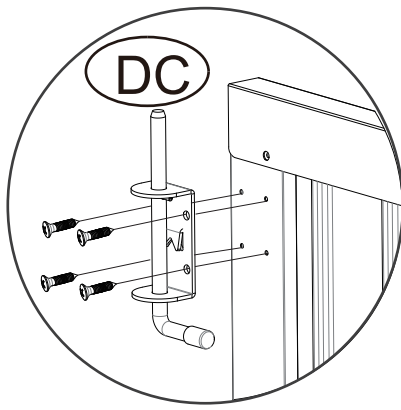


F1 X8



STEP 41

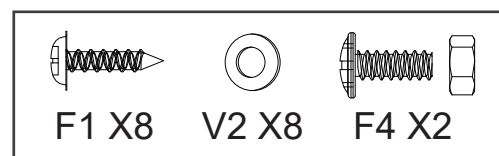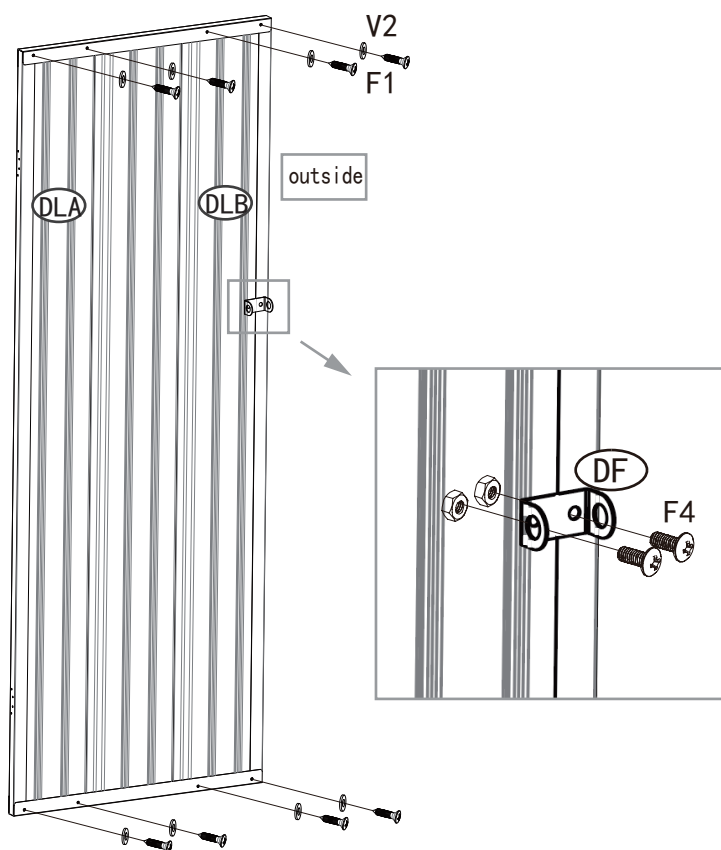


STEP 42

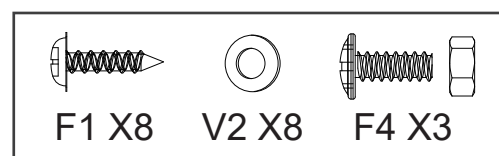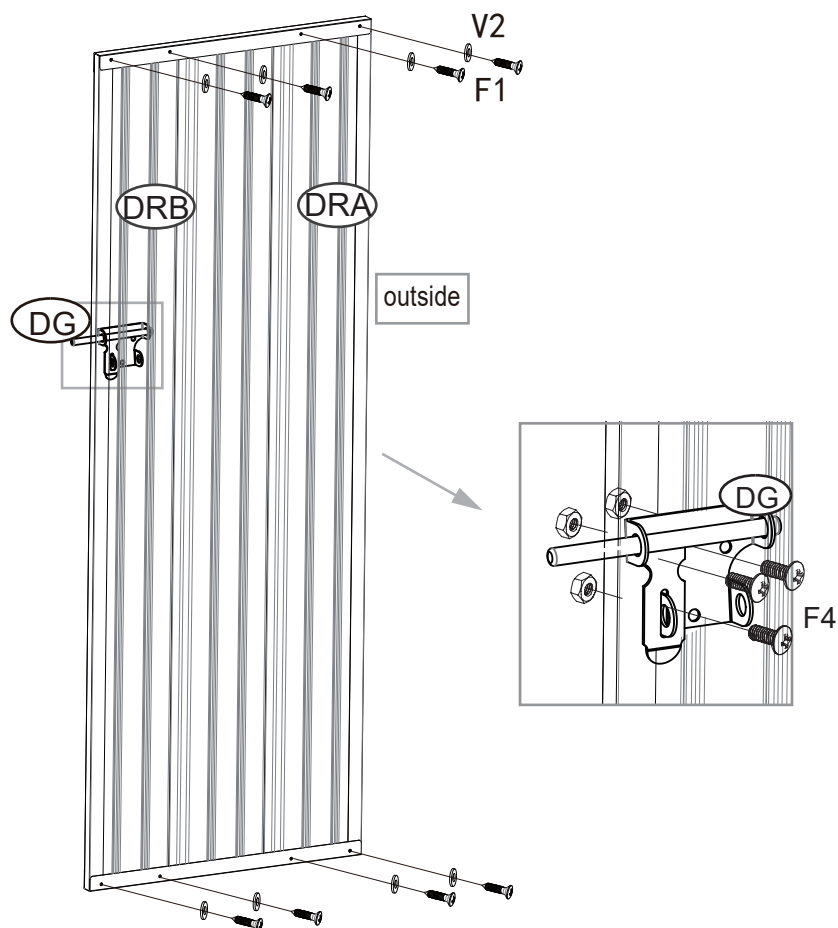

STEP 43

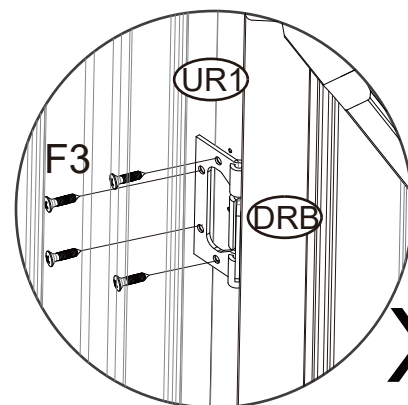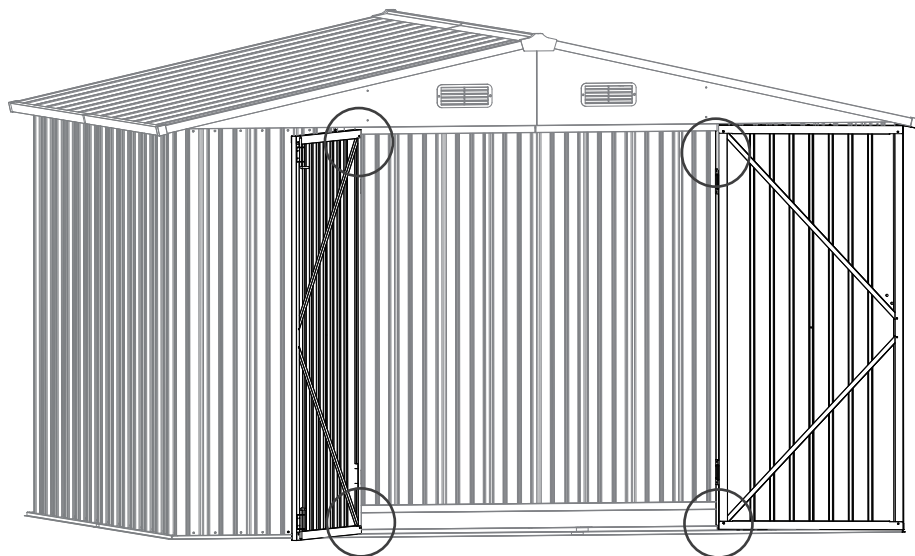


X4



F3 X16

STEP 44

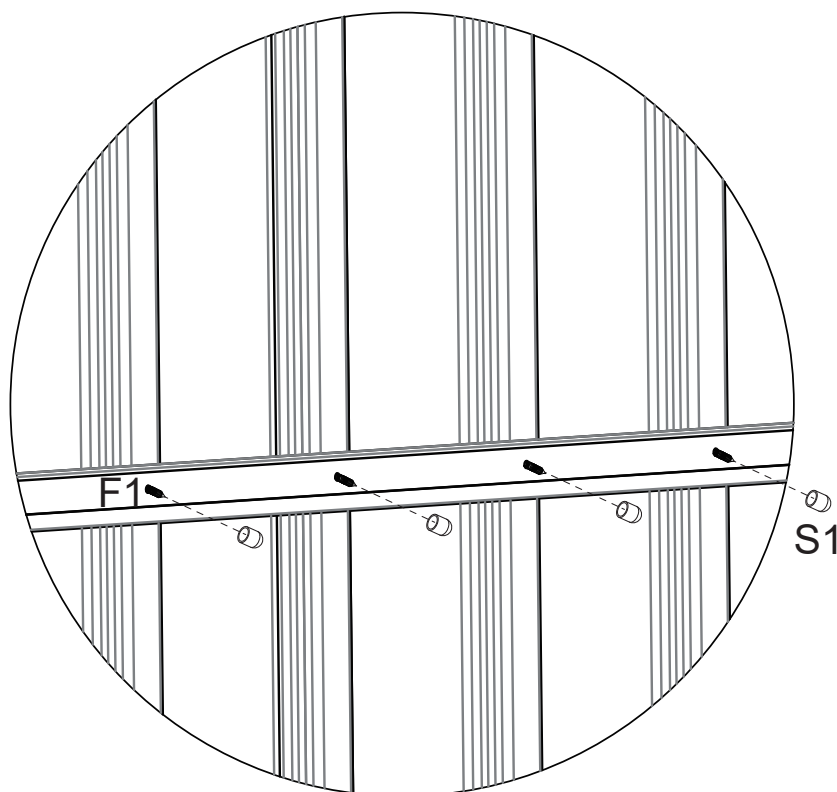

S1 X104

CARE & SAFETY

- In case of fire, do not attempt to extinguish any burning polypropylene with water. Unsuitable for storage of flammable or corrosive substances.
- It is of utmost importance to assemble all of the parts according to the directions. Do not skip any step.
- Please consult your local authorities if any permits are required to erect shed.
- Periodically check shed to assure that it remains stable and that the site remains level.
- It is highly recommended to secure the shed to an immovable object or to the ground by drilling holes in the floor at the pre-marked locations and inserting proper screws into the ground (size: 1.9"-3" ,screws are not included).
- Wear safety-goggles and always follow the manufacturer's instructions when using power tools.
- Wash shed with garden hose or a mild detergent solution. Using a stiff brush or abrasive cleaner could damage shed.
- Hot items such as recently used grills, blowtorches, etc. must not be stored in the shed.
- Heavy articles should not be leaned against the walls, as this may cause distortion.
- Keep roof clean of snow and leaves. Heavy amounts of snow on roof can damage the shed making it unsafe to enter.
- Although wind direction varies, it is an important factor when taking into account where to place your shed. Therefore, it is recommended to reduce wind exposure of the shed in general, and the door side in particular.
- Keep doors closed and locked to prevent wind damage.
- Do not stand on the roof.