




94040 Product Installation Instructions

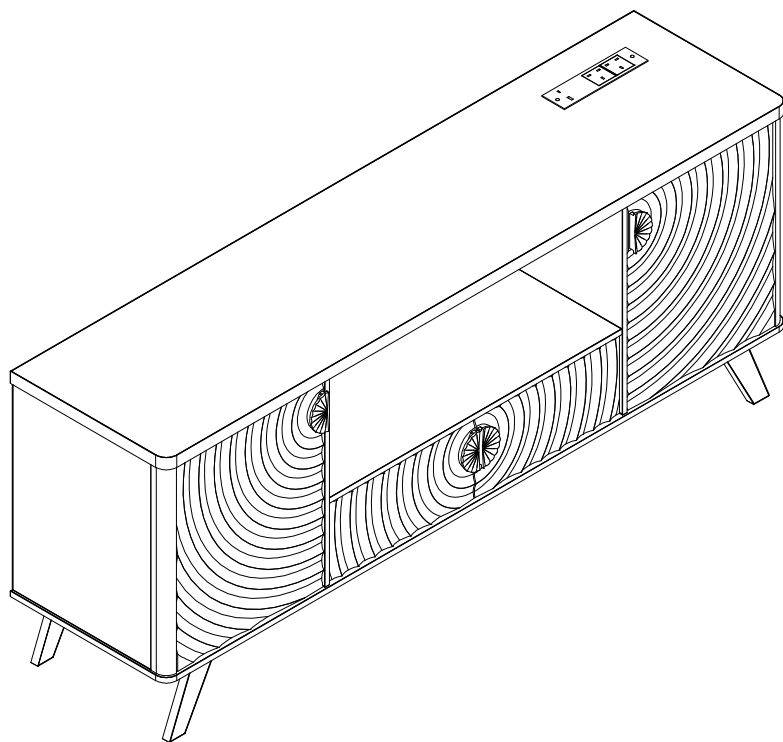





1X1




2X1




3X1




4X1




5X1




6X1




7X1




8X2




9X2




10X1



11X1




12X1



13X1




14X1




15X1




16X1




17X1




18X1




19X4



20X2




21X2




22X1



23X1







24X2



25X1



Accessories list

A	 64pcs Two in one screw (6x28mm)	B  64pcs Two in one nut (10x12mm)
C	 20pcs Wood chipping (6x30mm)	D  4pcs 8pcs Handle & screw (4x22mm)
E	 2pcs 4pcs Door Magnet & Screw(3X16mm)	F  2pcs 4pcs Iron Sheet & Screw(3x12mm)
G	 8pcs Laminate support nail	H  4pcs 24pcs Screw & Guide (12 inch) screw (3X12mm)
J	 16pcs 16pcs Back plate buckle & Screw 3x16mm	K  1pcs 2pcs module screw (3X12mm)
L	 2pcs Wire Clamp	M  4pcs Foot rubber pad(35x15x2mm)
N	 4pcs Door shaft	O  8pcs screw (7X28mm)
P	 1pcs screw (6X30mm)	Q  2pcs length=783
R	 2pcs Needle	S  1PCS Foot rubber pad(36x36x2mm)
T	 1pcs Double-head screwdriver, use as required	

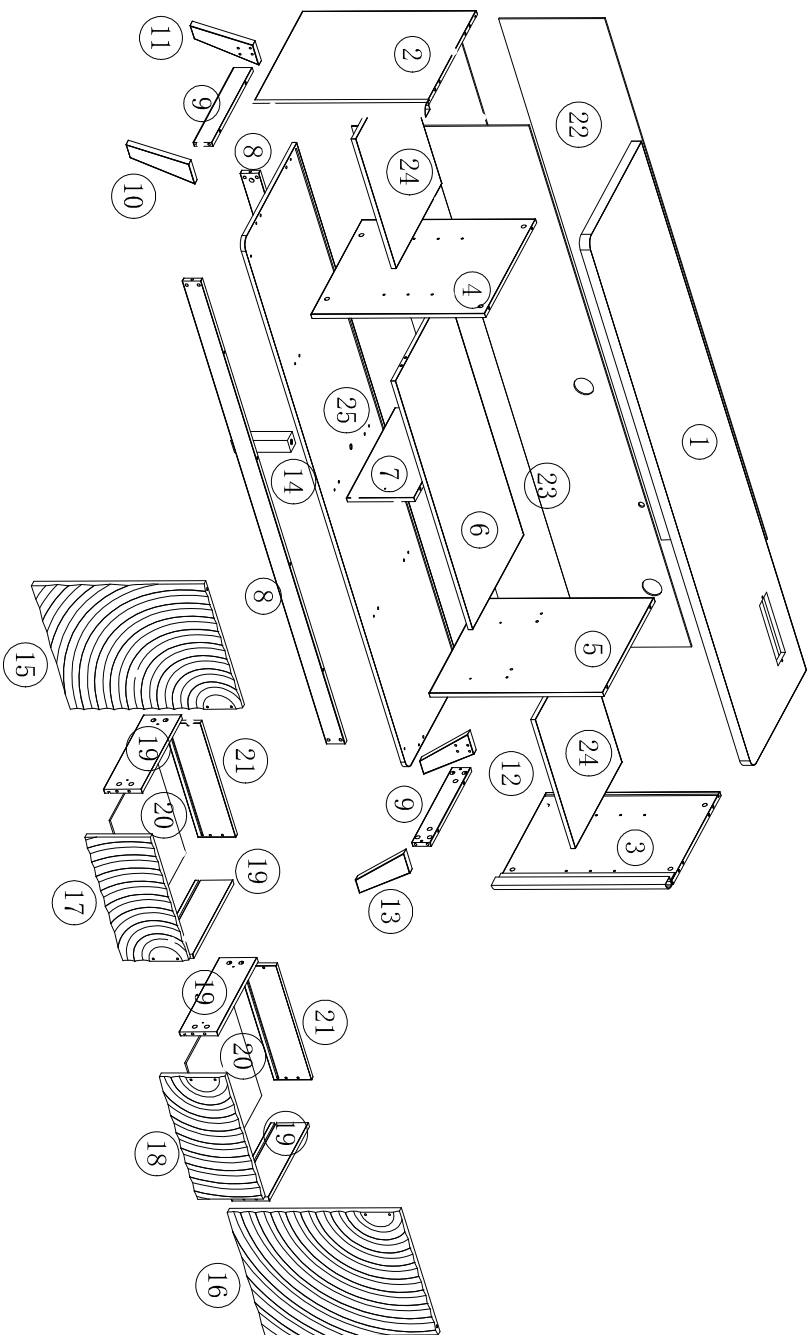


Use parts ① and ②

Step1





Use a screwdriver to lock in the direction of the "+" sign

Step2




Step3



Disassemble along the direction of "-" sign


01

A X4 B X4

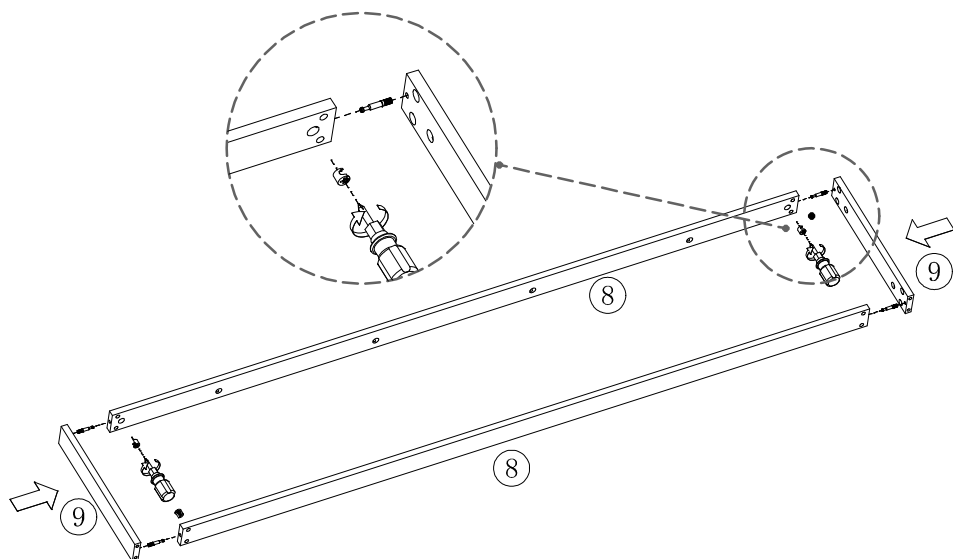


04

M X4 A X8

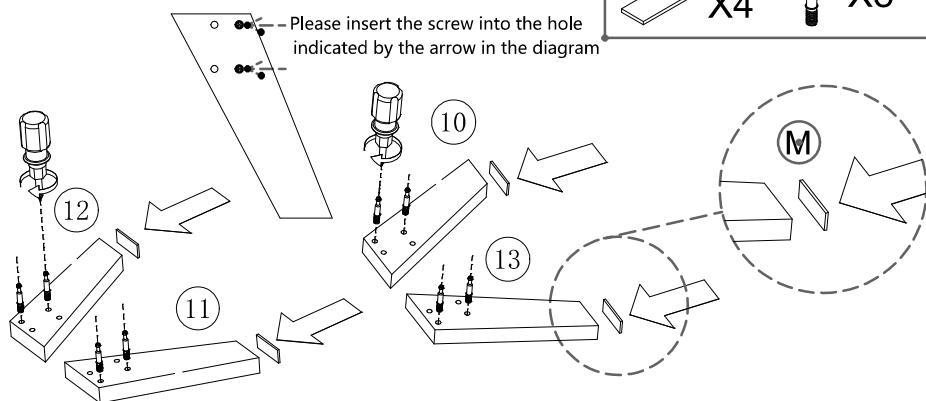


03

○ X8

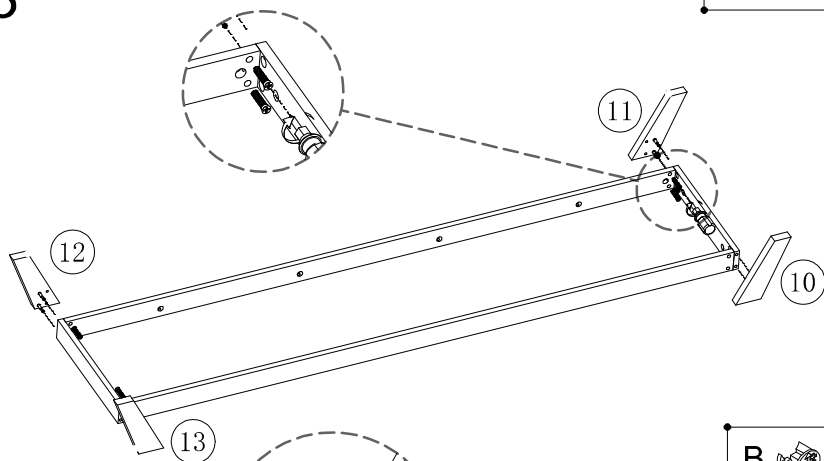

04


B X8

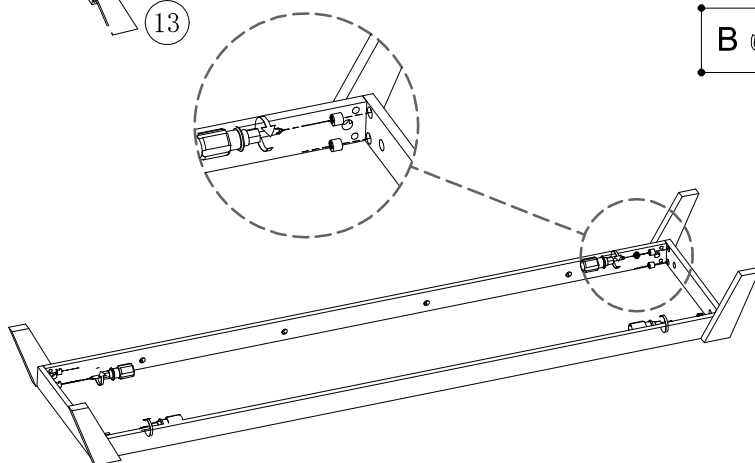

05

05


A  X12

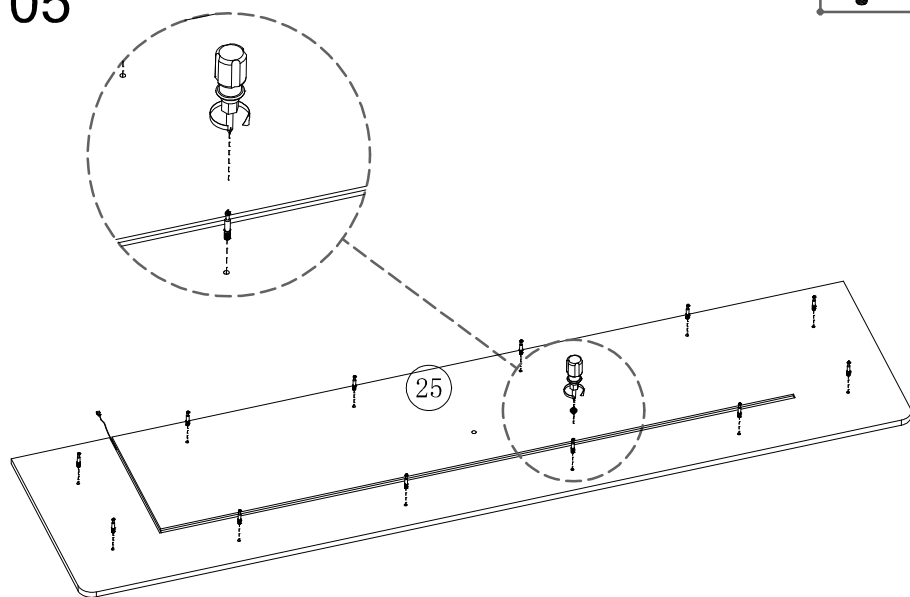

06

P  X1

S  X1

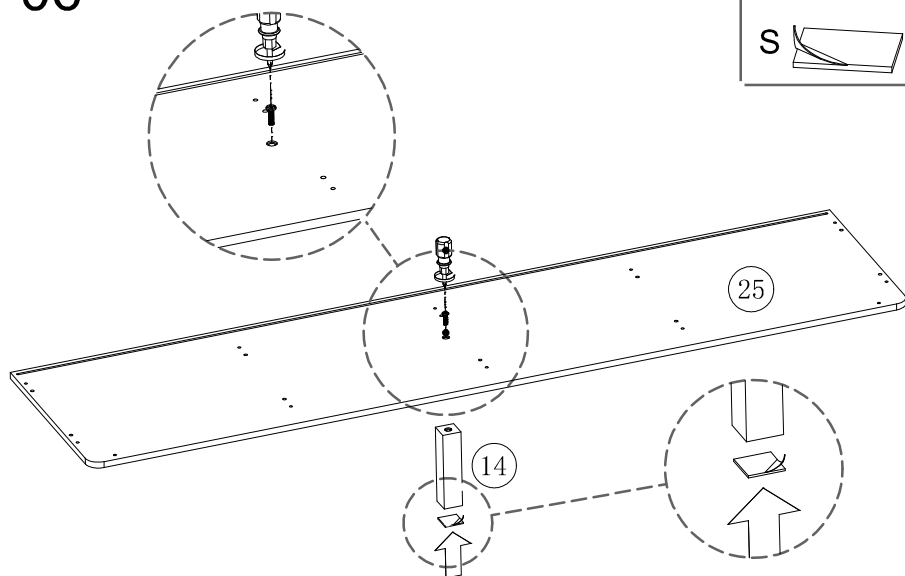


06

07




BX12

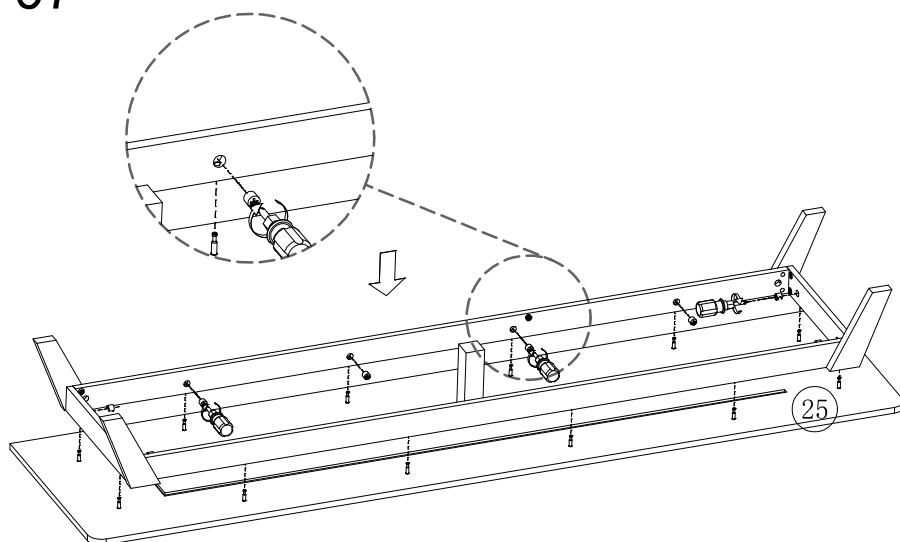

08


C  **X10**
A  **X10**

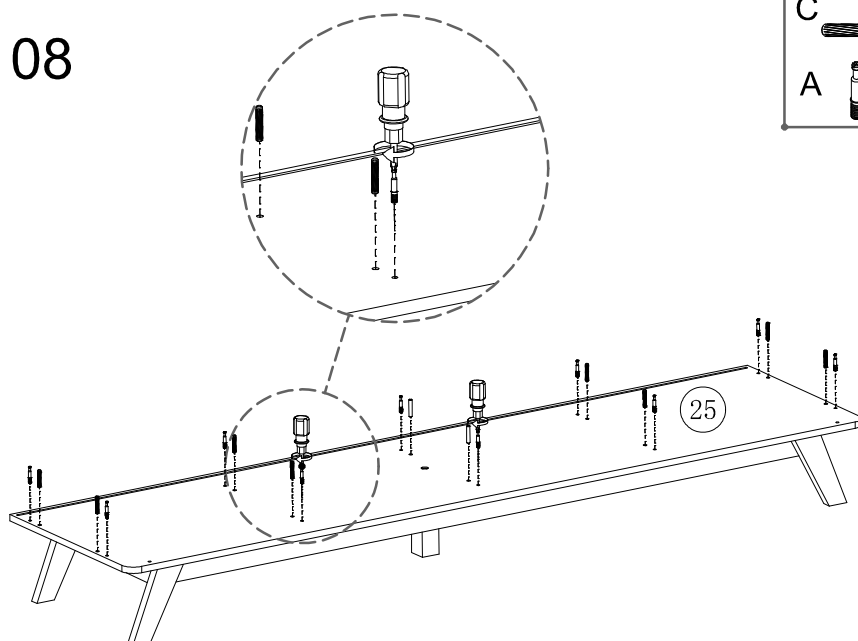

07


09

B  X2

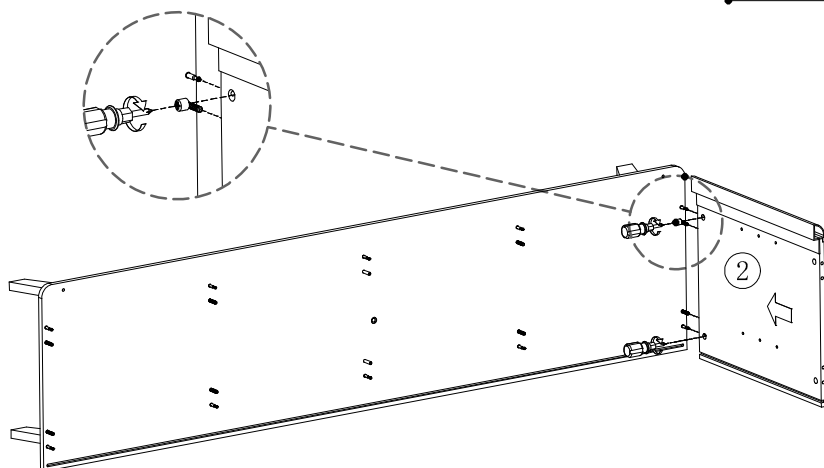


10

B  X2

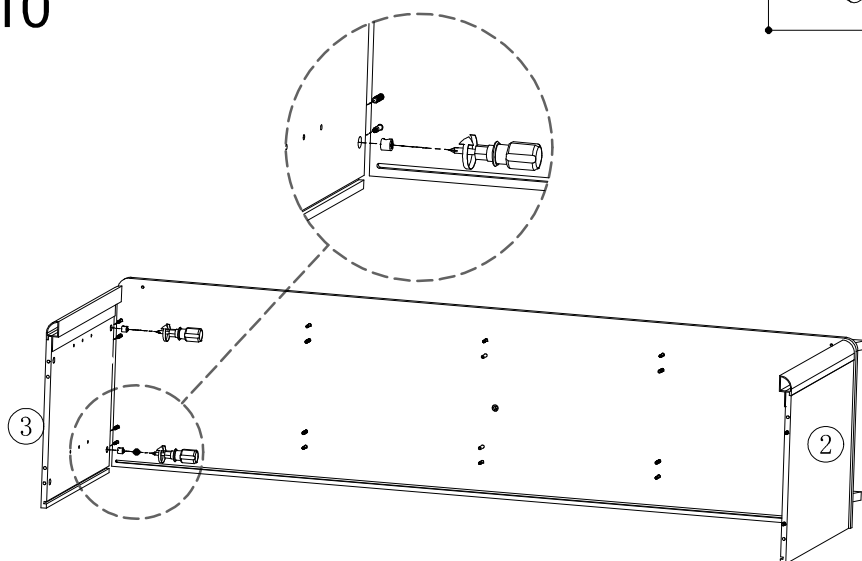

08

11

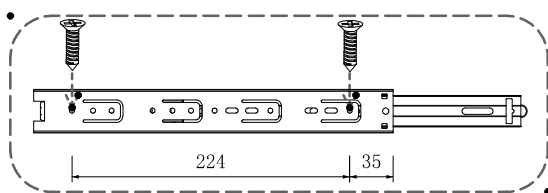


H



X1



X2

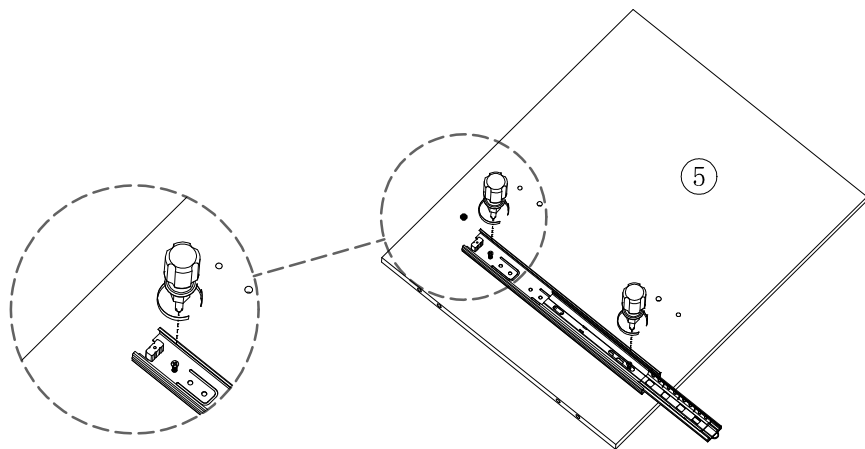

12

C




X2


A



X2

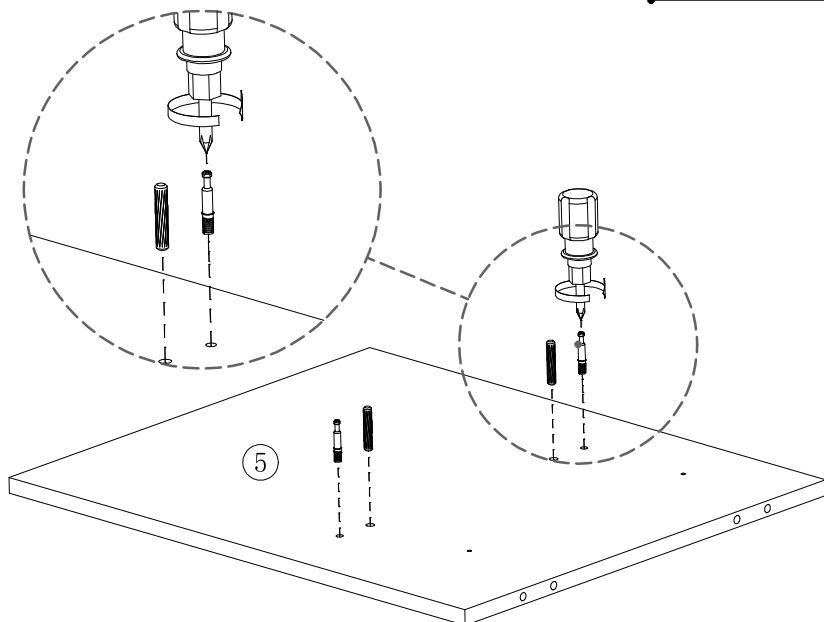


Drawer rail breakdown diagram

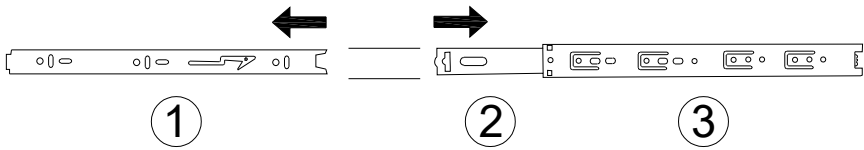



① Dismantle the schematic diagram

Step 1 : Pull the rails apart



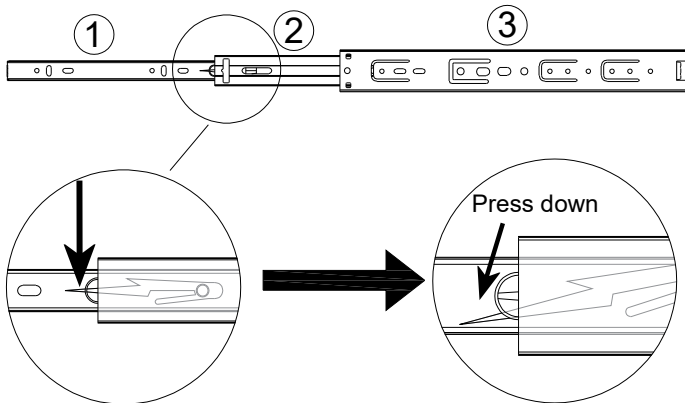


Step 2 : Press the nylon button and pull out ①.



Drawer rail decomposition completed schematic diagram






13

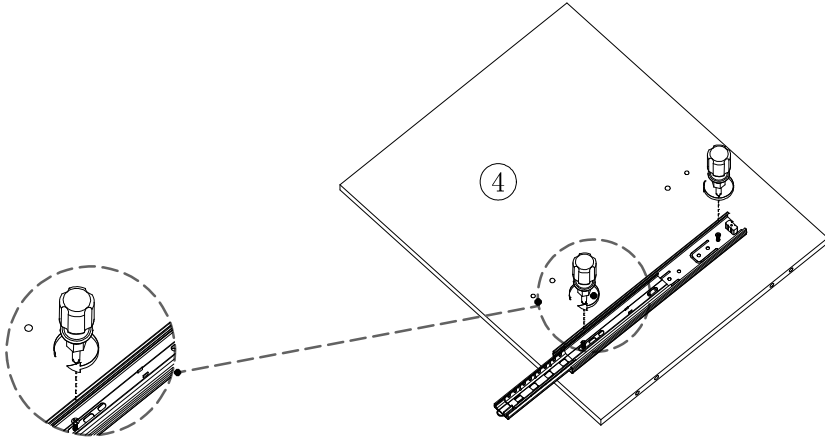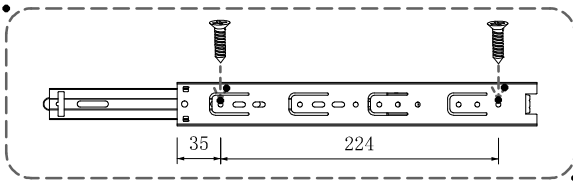


14

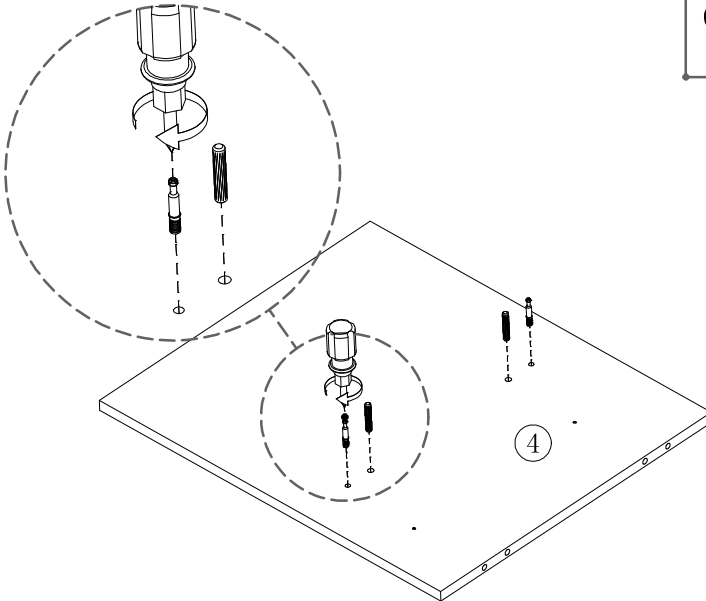

15


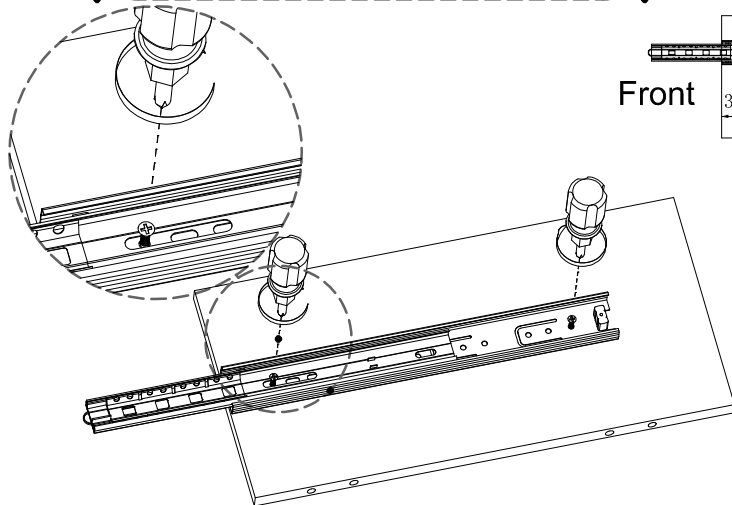

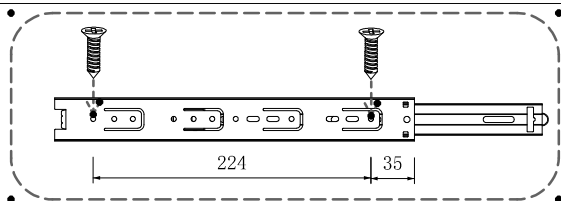


Front

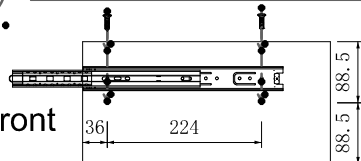


Insert the screw into the hole indicated by the arrow as shown in the diagram

16

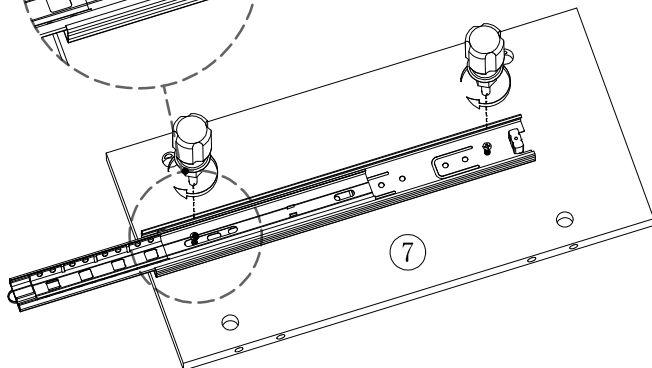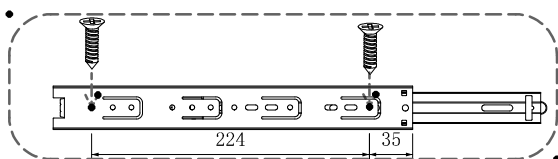


Front

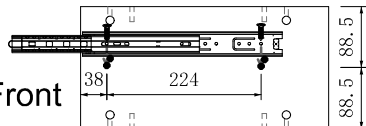


Insert the screw into the hole indicated by the arrow as shown in the diagram

17

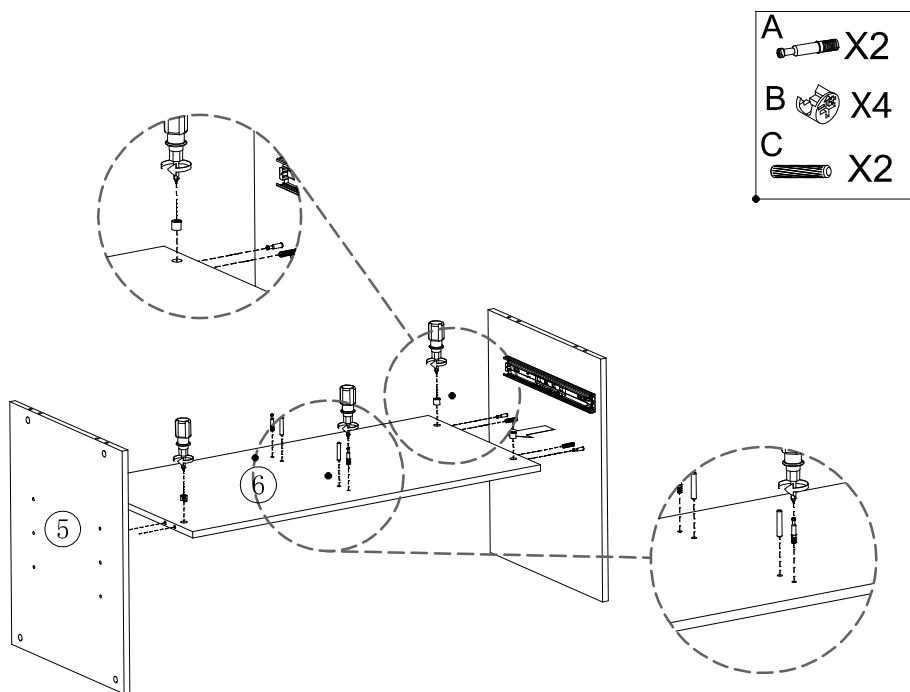


18

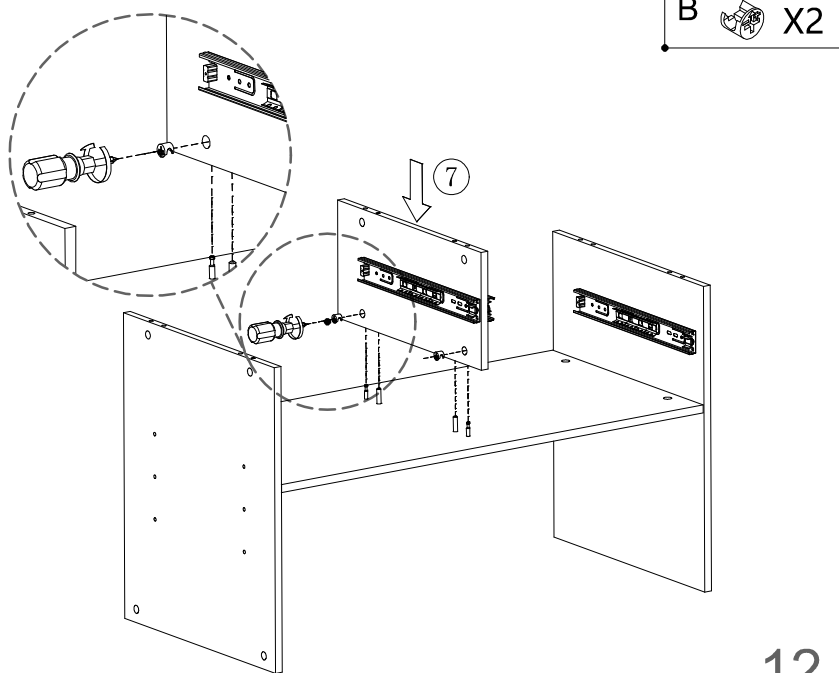

12


19

B  X6

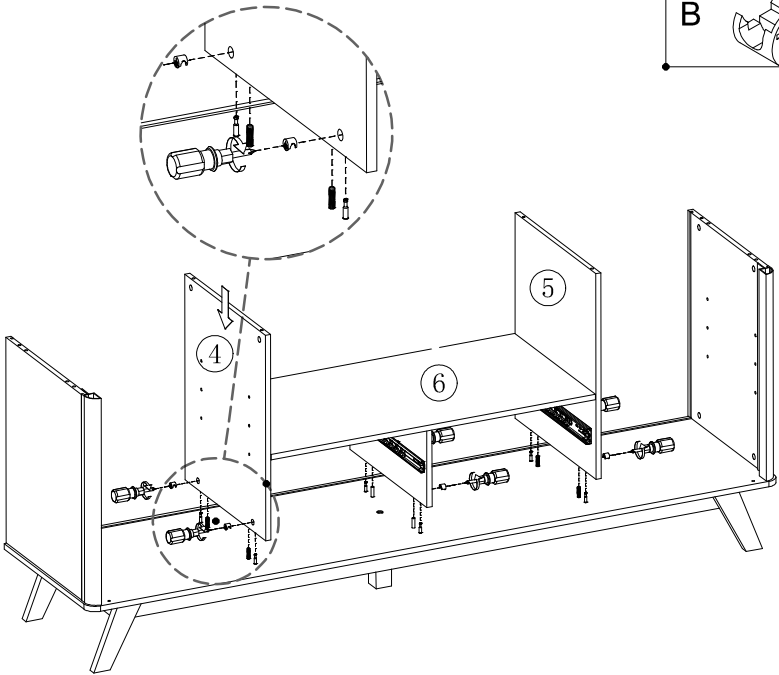


20


Q  X2

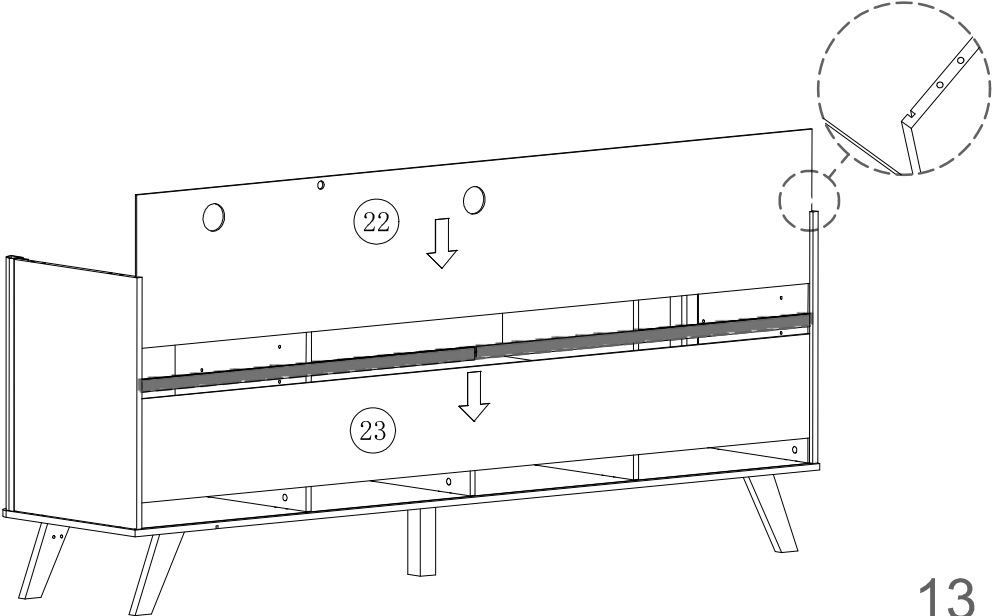

21

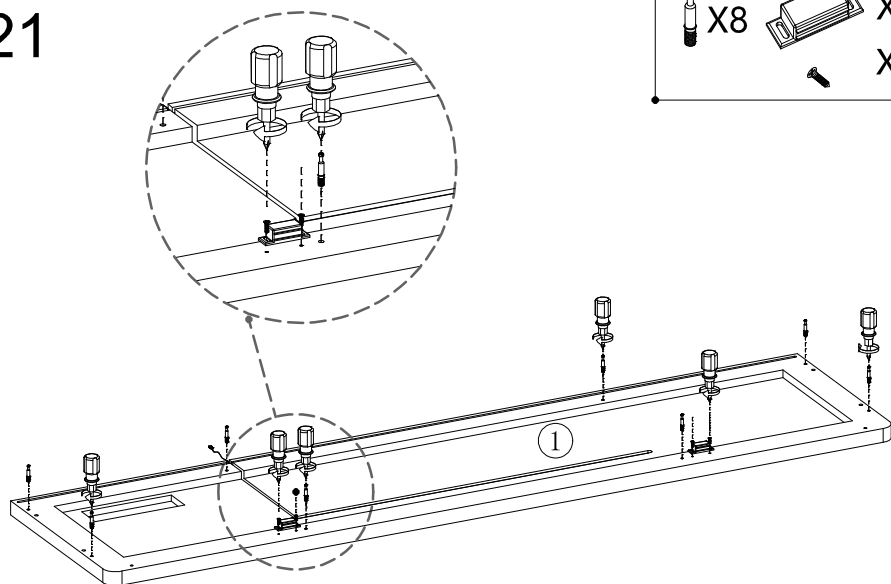


22

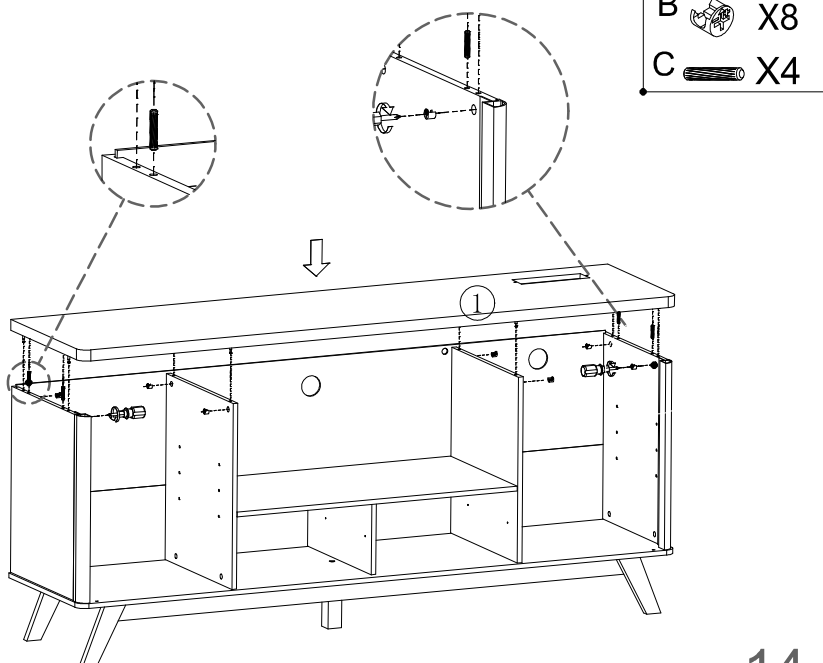


23

A  X16 B  X16

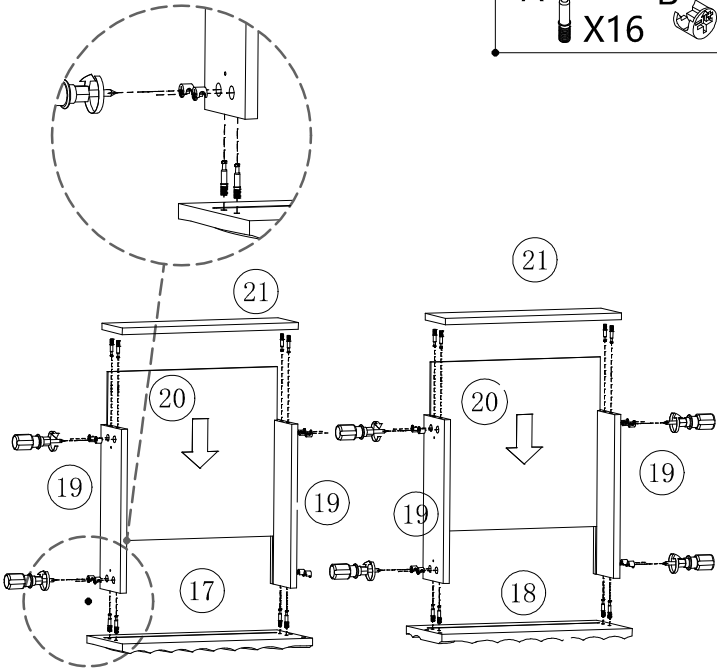


24


D  X2
 X4

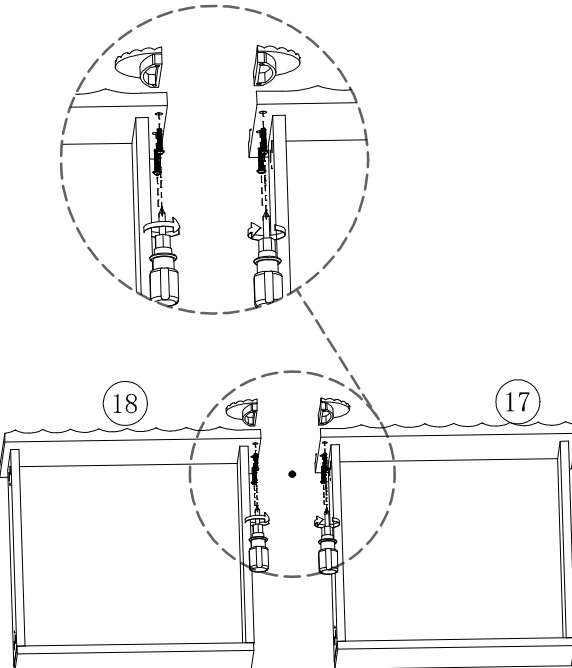

25

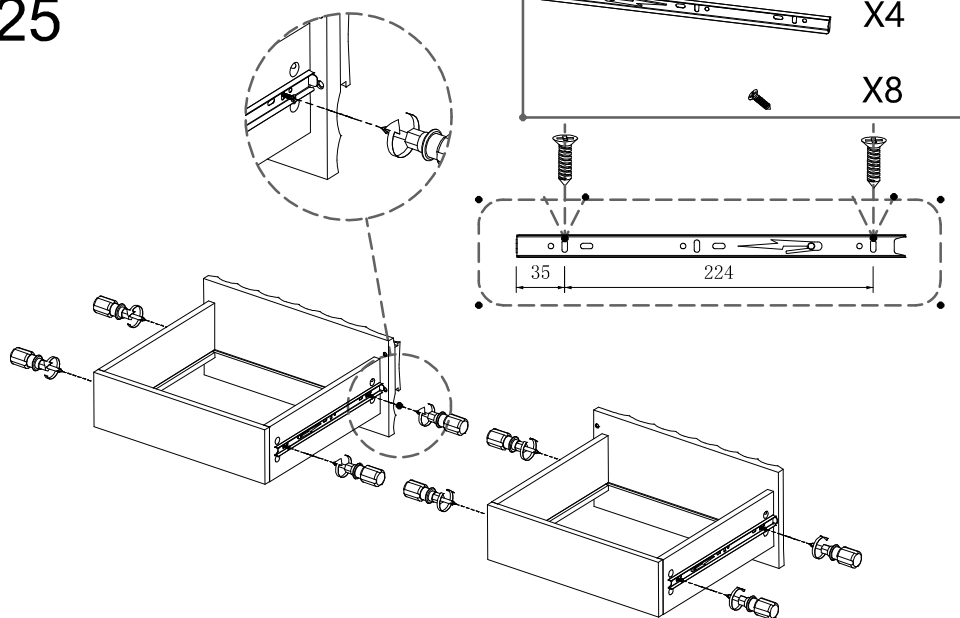


26

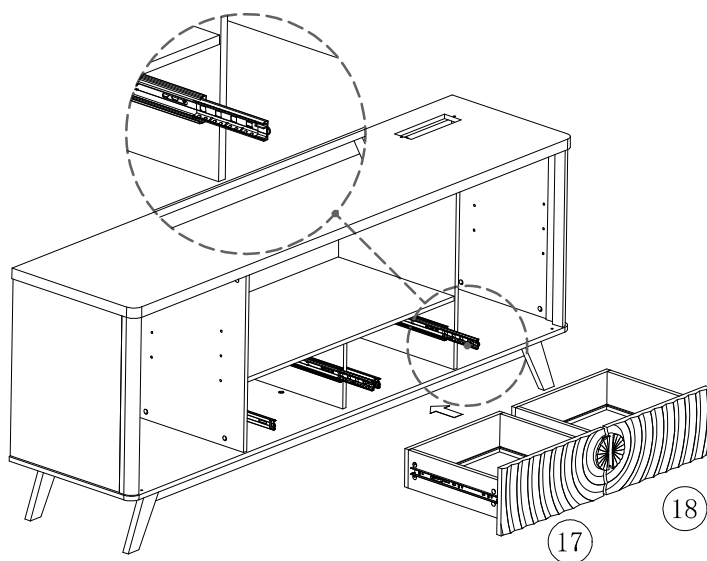


27

F X2  X4

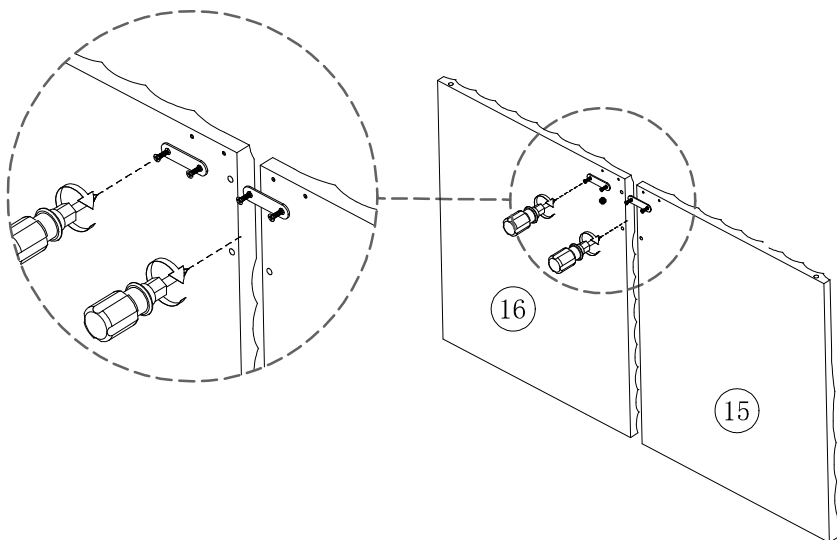

28


D X2
 X4

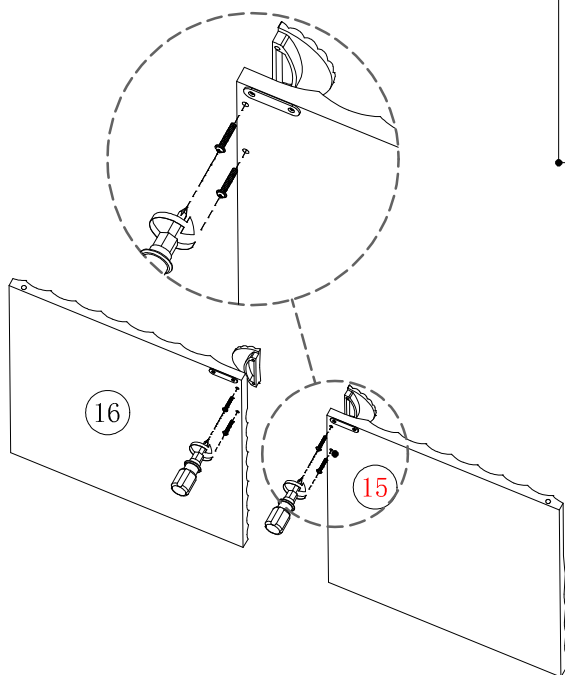

17


29

G  **X8**

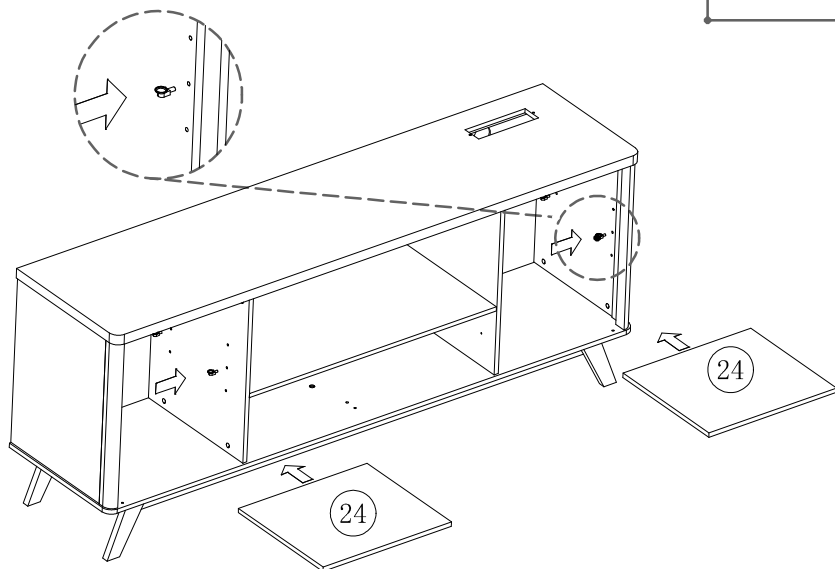

30


N  **X4**

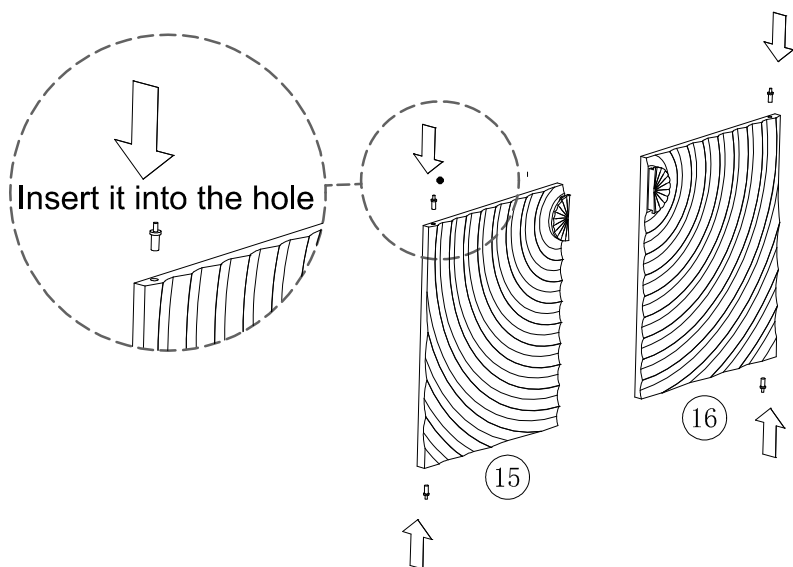



18

31

Door panel installation schematic steps

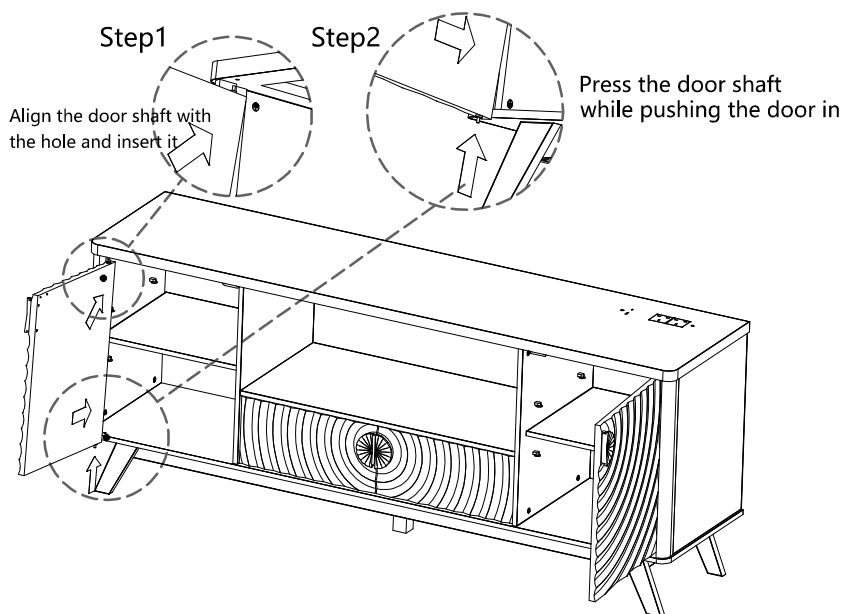


32

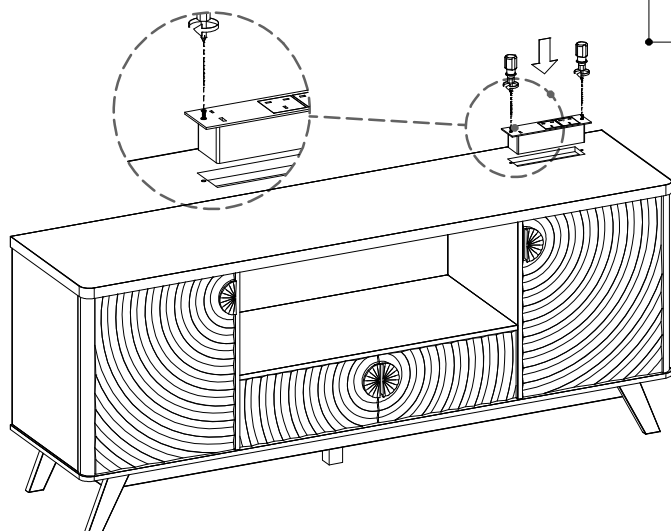


33

J X16 X16
L X2 R X2

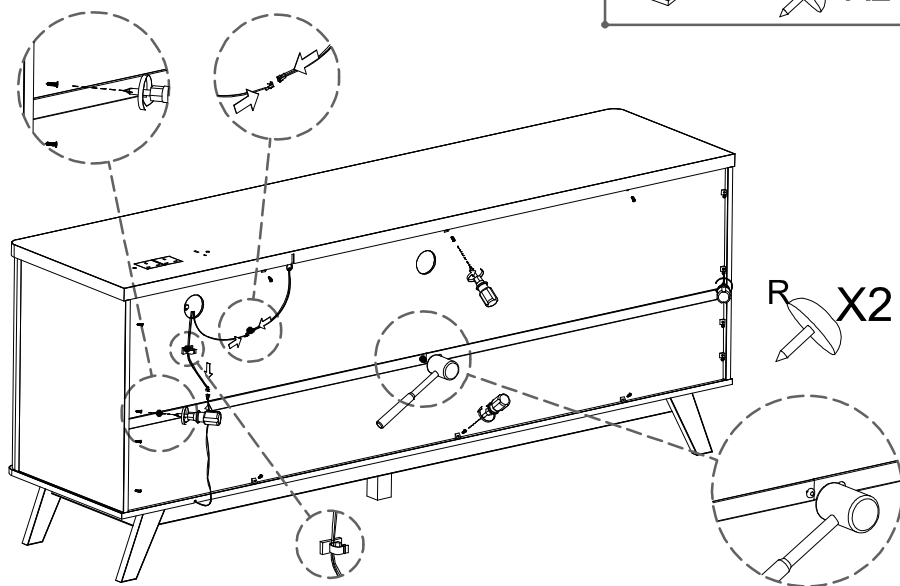

34

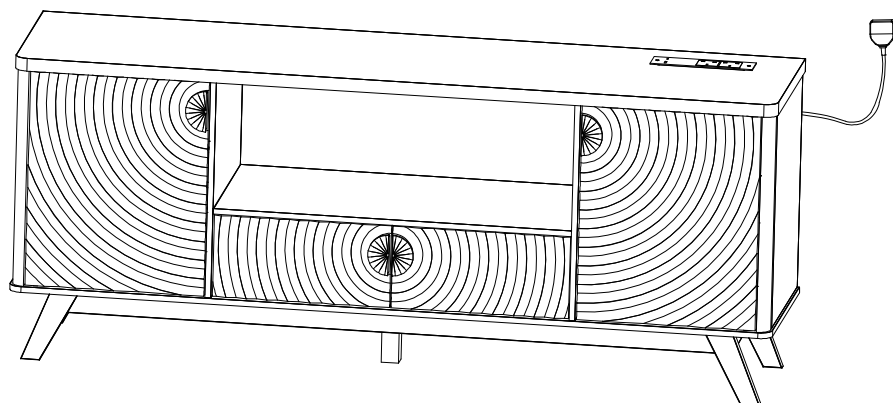



User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. It has 1 USB output port 1 Type-c port and can distribute the current output up to 5V DC-2A. With 2 touch buttons, it can turn ON/OFF the light, change light colors, and adjust the light luminance.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

- A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off.
- B. Long touch -> adjust the luminance.



This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.

