

ASSEMBLY INSTRUCTION

7025 Accent Chair

Parts List




(A) chair seat X 1 PC




(B) backrest X 1 PC




(C/L) left armrest X1PC



(C/R) right armrest X1PC



(D) back leg X 2PCS



(E) front leg X 2PCS

Hardware List



(F) long bolt x 4 PCS
5/16"x85mm



(G) short bolt x 12 PCS
5/16"x50mm



(H) flat washer X 16PCS




(I) spring washer X16PCS




(J) allen key X 1 PC

Step 1 Remove all the parts from the carton, and place them on a protected surface or carpet. Insert back legs (D) into the right armrest (C/R) and left armrest (C/L) as below drawing instructed,align to the holes, and fix them with short bolts (G) with spring washers (I), flat washers (H) by allen key (J),please make sure to fully tighten them securely.

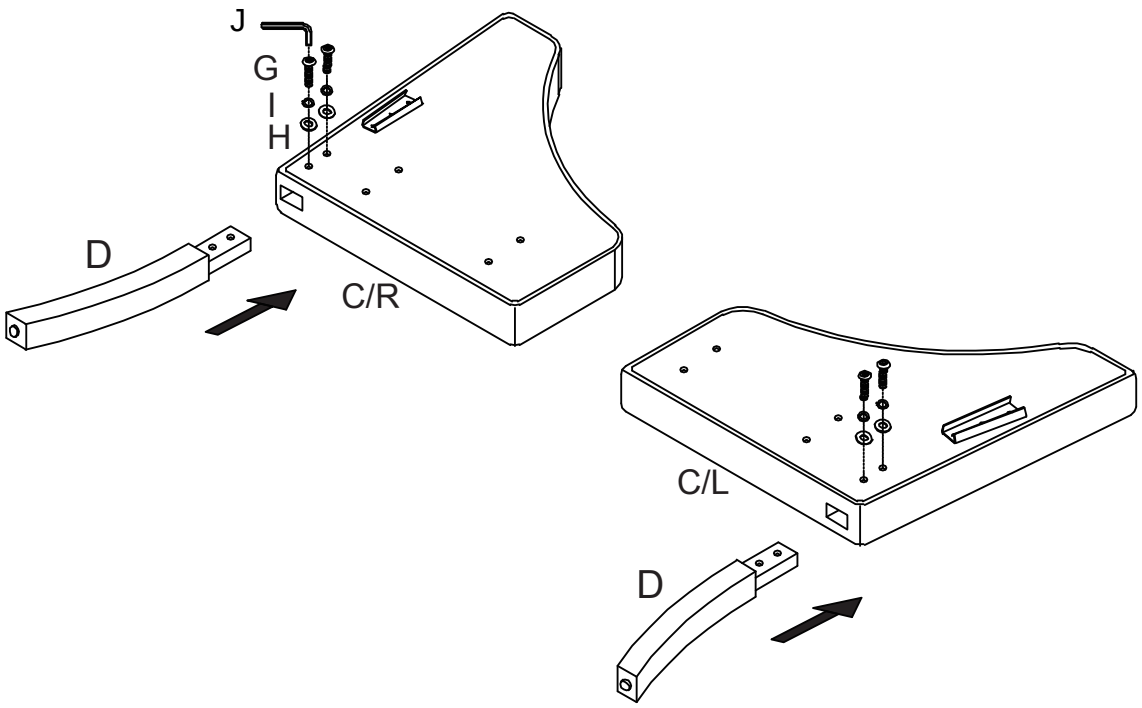

Step 2

Put the seat cushion (A) upside down on the floor , and open the black non-woven from the bottom. Please note you'll fix the bolts from inside.

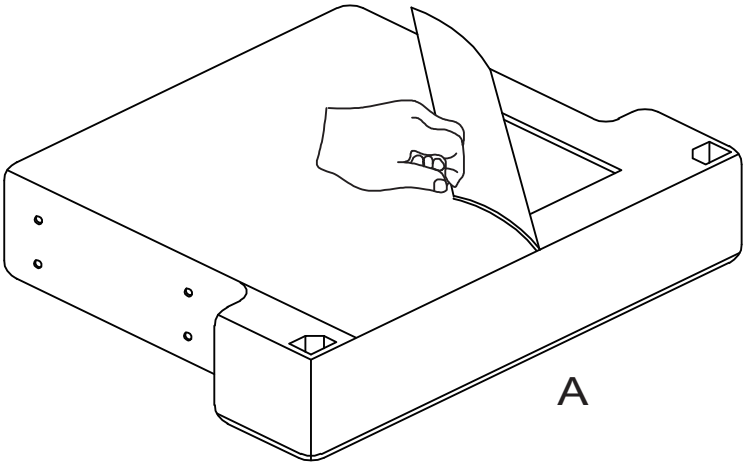


Step 3


Attach the right armrest (C/R) and left armrest (C/L) to the both side of chair seat (A) as indicated in the following figure ,align to their holes, and insert the bolt (G) x 8pcs with spring wahser (I) x 8pcs, flat washer (H) x 8pcs, then fully tighten all the bolts by allen key (J) ,double check all bolts are firmly assembled.

* Reminder:


You can place the seat cusion on a suitable platform or table,then to assemble the armrests.

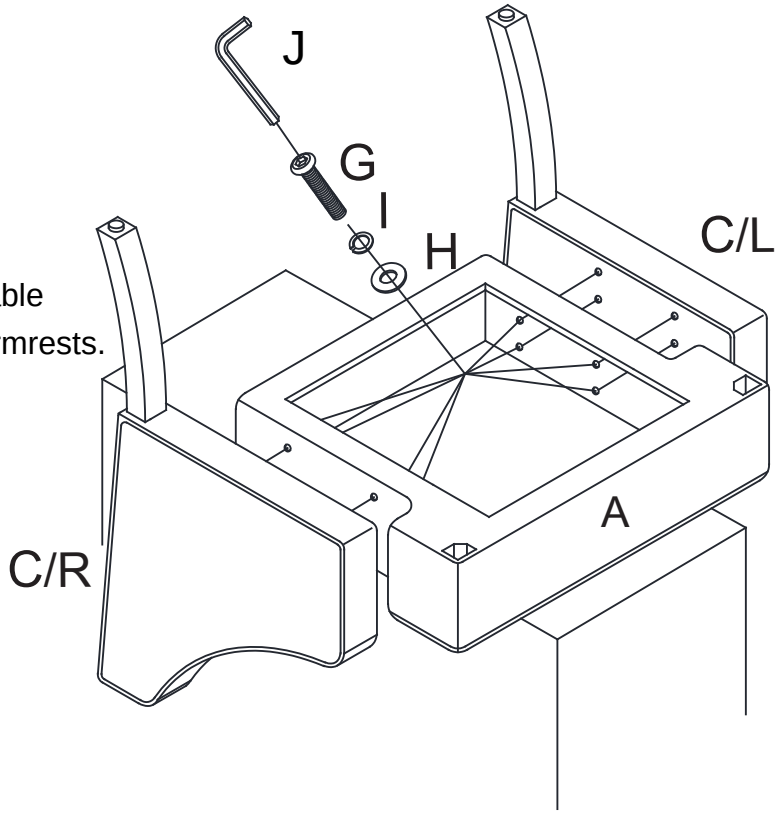


Step 4 Attach the front leg (E) x 2pcs to the bottom of chair seat (A), and fix them with the long bolt (F) x 4pcs, spring washer (I) x 4pcs, flat washer (H) x 4pcs by allen key (J) , please make sure to fully tighten all the bolts securely.

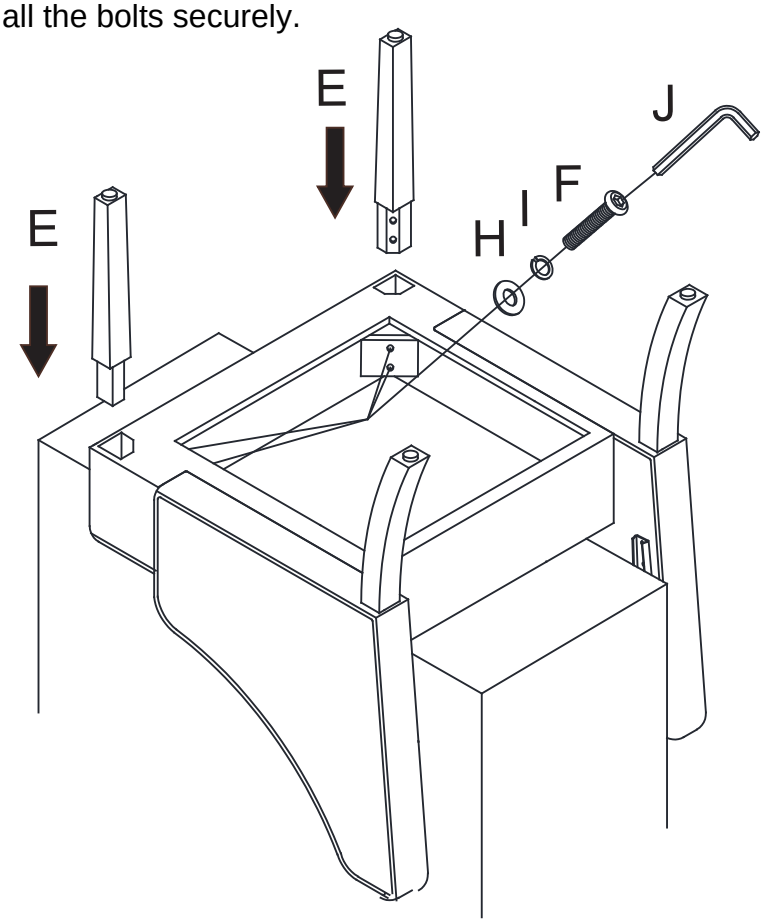

Step 5 Put the chair upright on the floor, and insert the brackets on the backrest (B) into the designated slots on both armrests,ensuring the brackets are fully engaged and secured.

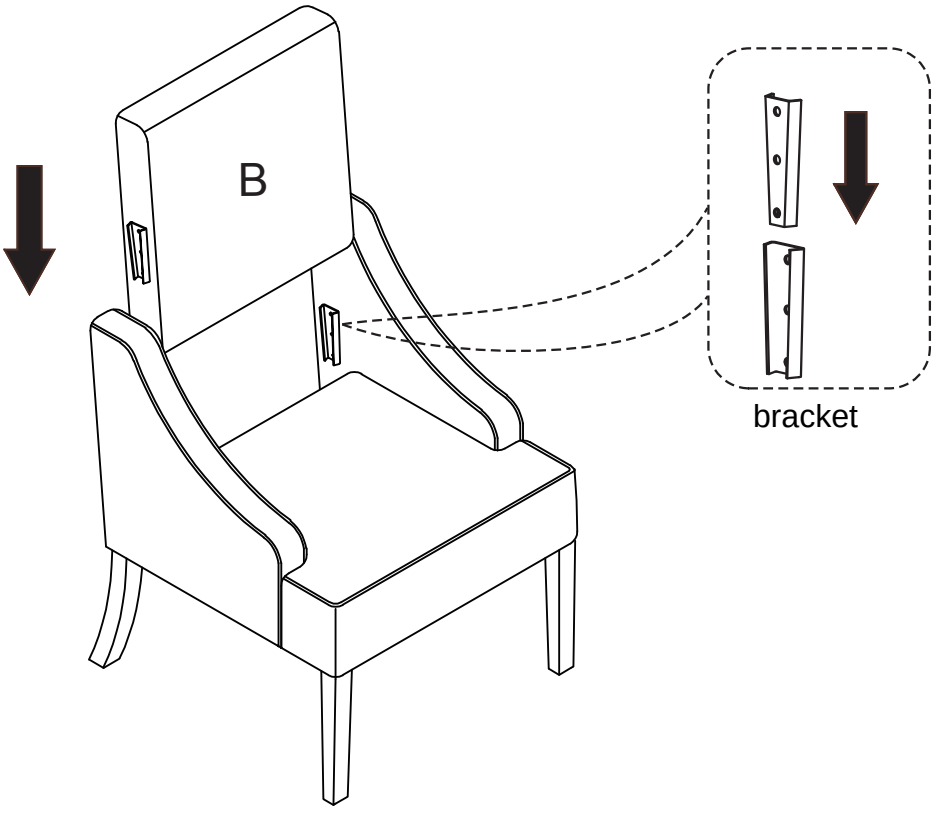

Step 6 Confirm all connections are tight and the chair structure is stable , then the assembly for the chair is completed , and you can take a seat on it now.

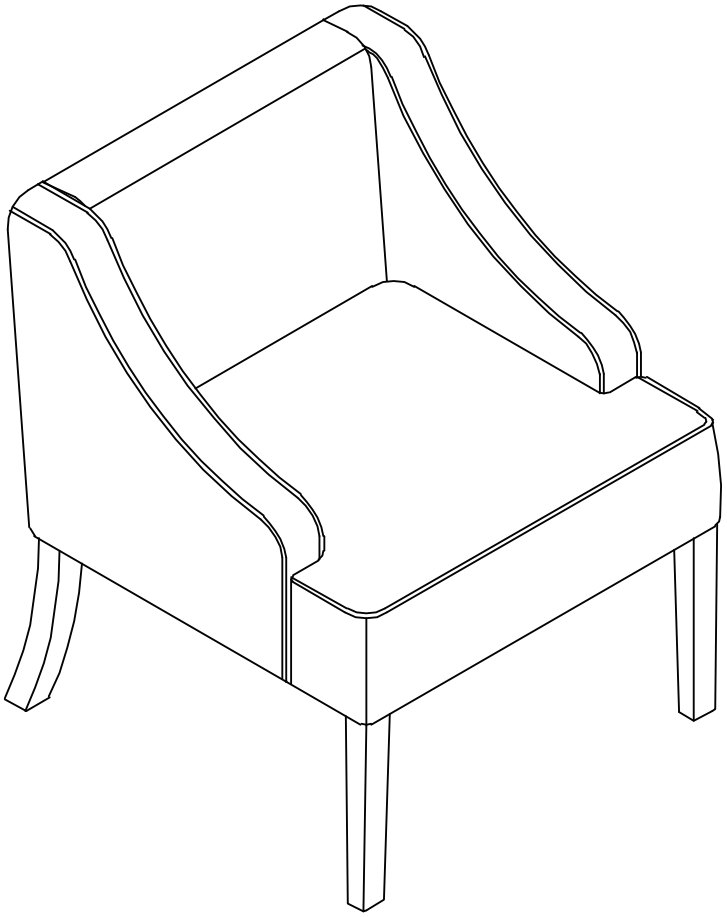

* Cleaning & Care

1. Treat surface with care. Surface is not scratch resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Or you can use dry solvee cleaner, spray dry cleaner to the dirt stain fabric ,then wipe clean using a damp cloth.
2. Hardware may loosen over time, periodically check to make sure all connections are tight and retighten if necessary.