

# ASSEMBLY INSTRUCTIONS


ASSEMBLY  
REQUIREMENTS:

2-Person  
Assembly

1 Hour 35 Minutes  
Assembly Time  
Per Item  
(Approximate)


Tools Required:  
(Not Provided)

Phillips Screwdriver  
Hammer/Mallet



## Thank you for purchasing our product!

Please refer and use this assembly instruction to assemble the product. Contact our customer service department in case there are any missing or damage parts or hardware. Replacement parts are normally shipped within 2 or 3 days.

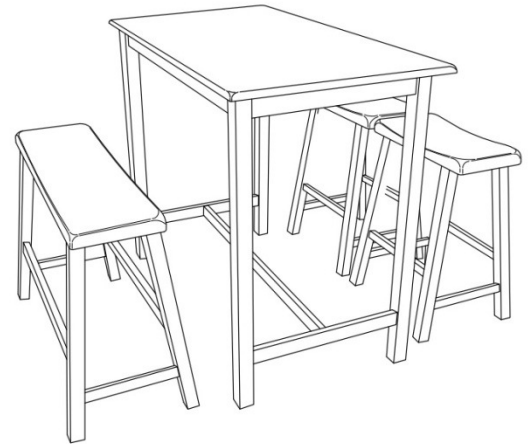

### ASSEMBLY PREPARATION

1. Remove all packaging materials, staples and packing straps from the carton.
2. Refer to Parts List and Hardware List and ensure they are complete before you start assembling.
3. Place all wooden parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent parts from getting scratched.

### SAFETY PRECAUTION:

1. KEEP ALL HARDWARE PARTS OUT OF REACH OF CHILDREN.
2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS.

### TIPS FOR ASSEMBLY:










1. Allow ample room for assembly and in close proximity to where product will be placed.
2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
3. Please check all of the parts and quantities are included before assembly. Contact customer service for missing parts.
4. Identify all of the parts, hardware and quantities required for each step.
5. During assembly, do not over-tighten any fittings as this may cause damage.
6. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
7. Always place the product on a flat surface.
8. Do not sit or stand on the partially assembled product; only use the product for which it is intended.







### CARE AND MAINTENANCE

- Use a slightly damp cloth to clean the product. Do not use bleach or abrasive cleaning material.
- Check all the fittings periodically and re-tighten as necessary. Do not use the product if any of the parts is damaged or broken.
- Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or delaminate.
- Do not place hot items (e.g. hot drinks) directly onto the wood surface.
- Do not drag and/or pull the furniture.

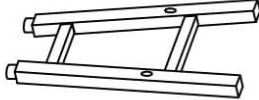This product is for indoor and household use only - not for commercial use.

# ASSEMBLY INSTRUCTIONS

Parts List			
NO.	Picture	Description	QTY
A		Table Top	1
B		Table Legs ( 2 Left & 2 Right )	4
C		Table Short Crossbar	2
D		Table Long Crossbar	1
E		Leg Frame	6
F		Stool Seat	2
G		Stool Stretcher	4
H		Bench Seat	1
I		Bench Stretcher	2

Hardware List			
NO.	Picture	Description	QTY
K		JCBC BOLT M6X60	8
L		LOCK WASHER $\frac{5}{16}$	8
M		FLAT WASHER $\frac{5}{16}$	8
N		WOOD SCREW M4 X 38	30
O		GLUE	3
P		ALLEN WRENCH	1

## Assembly Step

### ASSEMBLE TABLE

#### Step 1




B ( LEFT )  
B ( RIGHT )




Identify and place all of the Table parts on a material that does not scratch or damage the parts.

#### Step 2

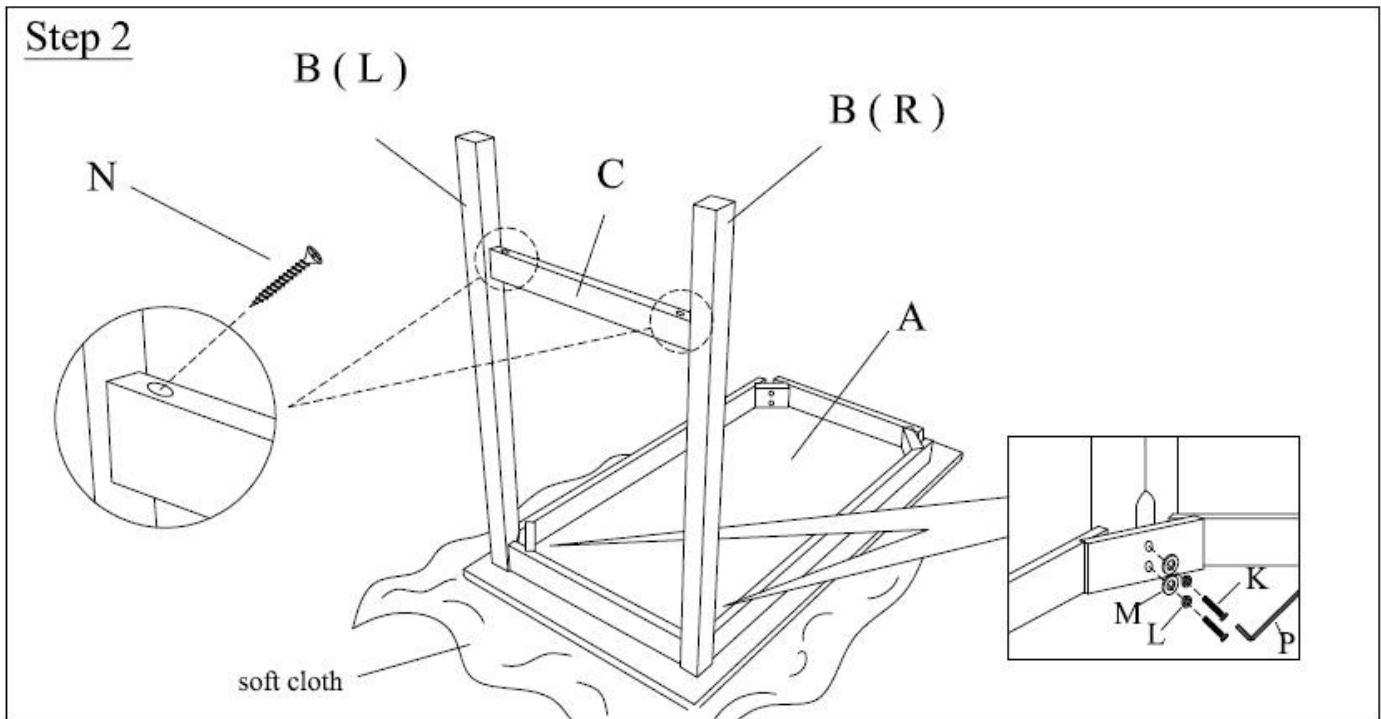

- Place tenon on C onto mortise on Leg B(L). Hold Leg B(L) firmly and at the same time twist+turn and push C to force tenon into mortise
- Place mortise of Leg B(R) onto tenon of C. Hold C firmly and twist+ turn and push Leg B(R) to enable the other tenon on C to be inserted into the mortise. Ensure screw hole on C faces leg end.
- Attach Leg B(L) & B(R) to corner block of A. Align bolt holes on 1 & 2 to bolt holes on corner block and fasten using M,L&K.

### Step 3

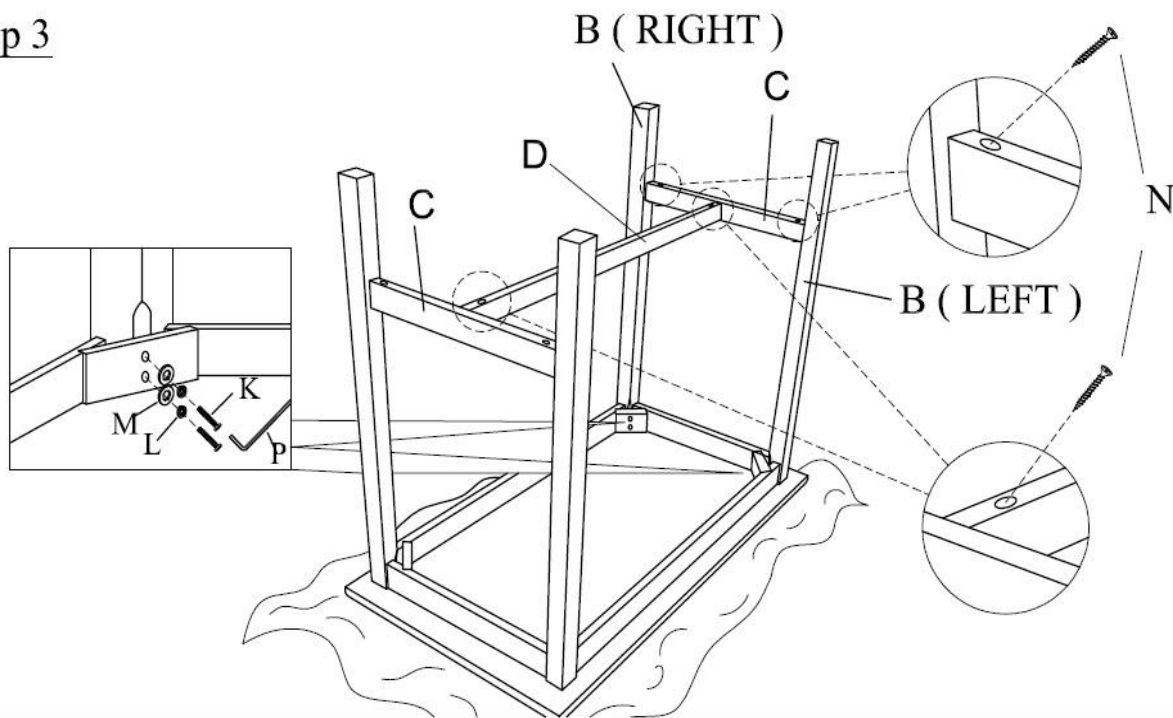


- Use same procedures a) & b) in STEP 2 to assemble C and Leg B(L) & B(R).
- Place tenon on D onto mortise in the middle of C. Insert by holding C, and at the same time twisting+turning and pushing D to force tenon into mortise.
- Place mortise of C to tenon of D. Hold D firmly and straight. Twist+ turn and at the same time push Leg Assembly B(L) / B(R) / C to enable the other tenon on C to be inserted into the mortise of C. Ensure screw holes on D face up.
- Attach Leg B(L) & B(R) to corner blocks. Align bolt holes on B(L) & B(R) to bolt holes on corner blocks and fasten using M, L & K.
- Ensure C & D are straight. Use N to fasten the parts.

## ASSEMBLE CHAIR

### Step 4



**F**




**E**




**G**

## Step 5

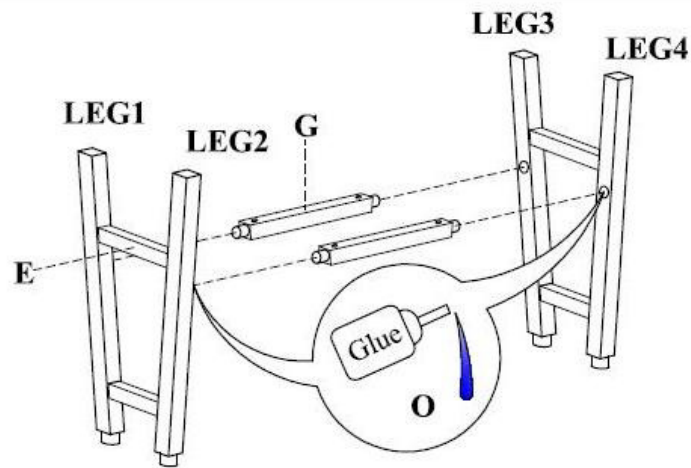


- Apply Glue (O) to designated holes on Leg Frame (E)
- Place tenon on G onto mortise on Leg 1. Hold Leg 1 firmly and at the same time twist+turn and push
- Use the same procedure above to attach G to Leg 2
- Place mortise of Leg 3 onto tenon of G. Hold G firmly and twist+turn and push Leg3/4 assembly to enable the other tenon on G to be inserted into the mortise of Leg 3. Do not insert tenon completely.
- Set Leg Assembly to rest on Leg 1&2 horizontally (G vertically) on a material that does not damage the Leg1&2. Align mortise of Leg 4 above tenon of G. Protect the surfaces above the mortise of Leg 3&4 e.g. cardboard material from packing. Use a hammer to tap on cardboard area above mortise to fit tenon into mortise completely.

## Step6

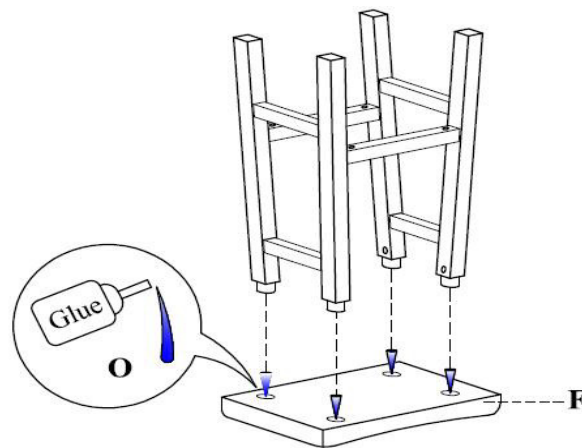


- Place Stool Seat (F) bottom-side up on a material that does not scratch or damage its surface.
- Apply Glue (O) to designated holes on (F).
- Attach the Leg Frame assembly from Step 5 to (F) as shown.

## Step 7

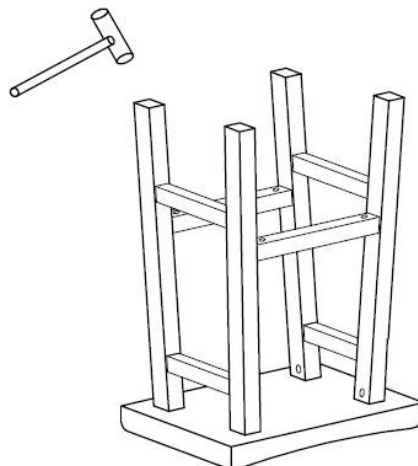

Use mallet/hammer to pound onto the legs to completely insert tenon into mortise - refer to photo below.


## Step 8

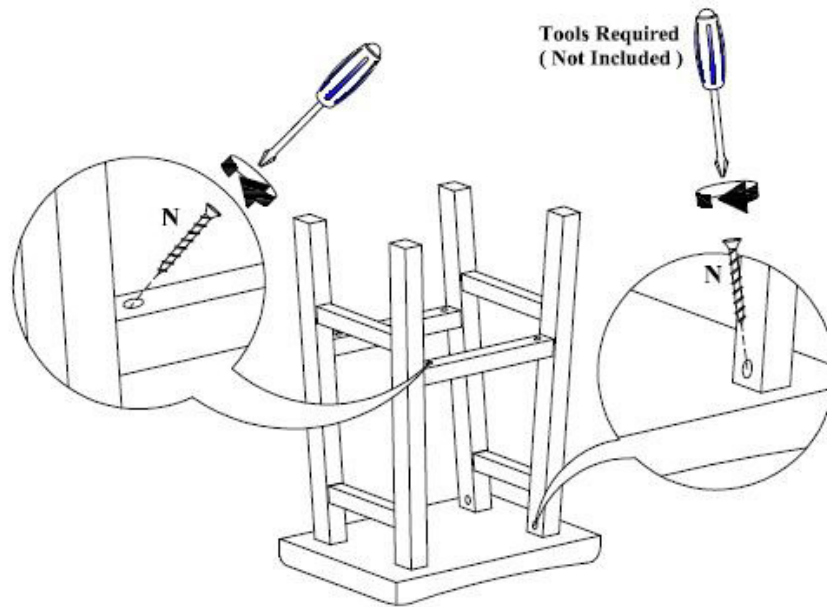

Use Screw (N) to fasten Leg Frames to Stool Seat. Next, fasten Stool Stretcher (G) to Leg Frames as shown  
**DO NOT USE THE STOOL UNTIL GLUE IS DRY**

## ASSEMBLE BENCH

### Step 9



E




H



I


Identify and place all of the Bench parts on a material that does not scratch or damage the parts.

### Step 10

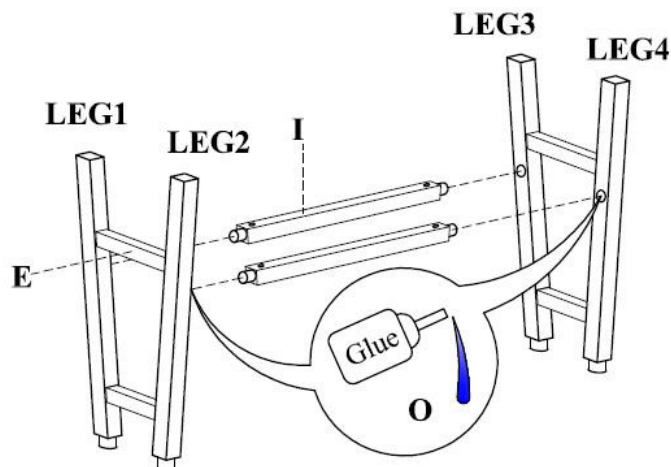


- Apply Glue (O) to designated holes on Leg Frame (E)
- Place tenon on I onto mortise on Leg 1. Hold Leg 1 firmly and at the same time twist+turn and push G to force tenon into mortise.
- Use the same procedure above to attach I to Leg 2
- Place mortise of Leg 3 onto tenon of I. Hold I firmly and twist+turn and push Leg3/4 assembly to enable the other tenon on I to be inserted into the mortise of Leg 3. Do not insert tenon completely.
- Set Leg Assembly to rest on Leg 1&2 horizontally (I vertically) on a material that does not damage the Leg1&2. Align mortise of Leg 4 above tenon of I. Protect the surfaces above the mortise of Leg 3&4 e.g. cardboard material from packing. Use a hammer to tap on cardboard area above mortise to fit tenon into mortise completely.

## Step 11

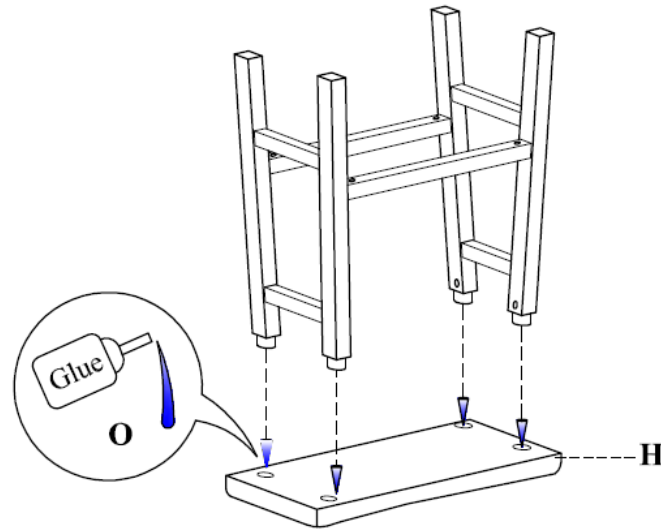


- Place Stool Seat (F) bottom-side up on a material that does not scratch or damage its surface.
- Apply Glue (O) to designated holes on (F).
- Attach the Leg Frame assembly from Step 5 to (F) as shown.

## Step 12

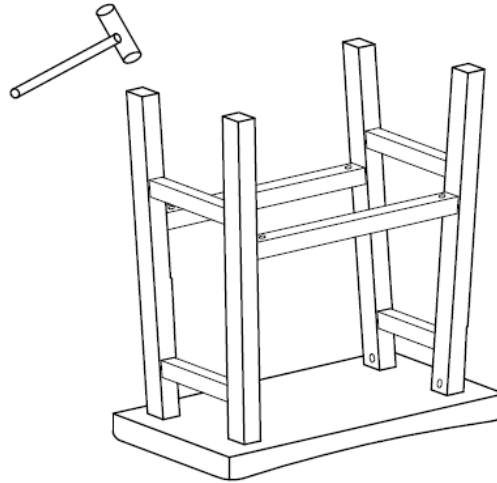

Use mallet/hammer to pound onto the legs to completely insert tenon into mortise - refer to photo below.

## Step 13

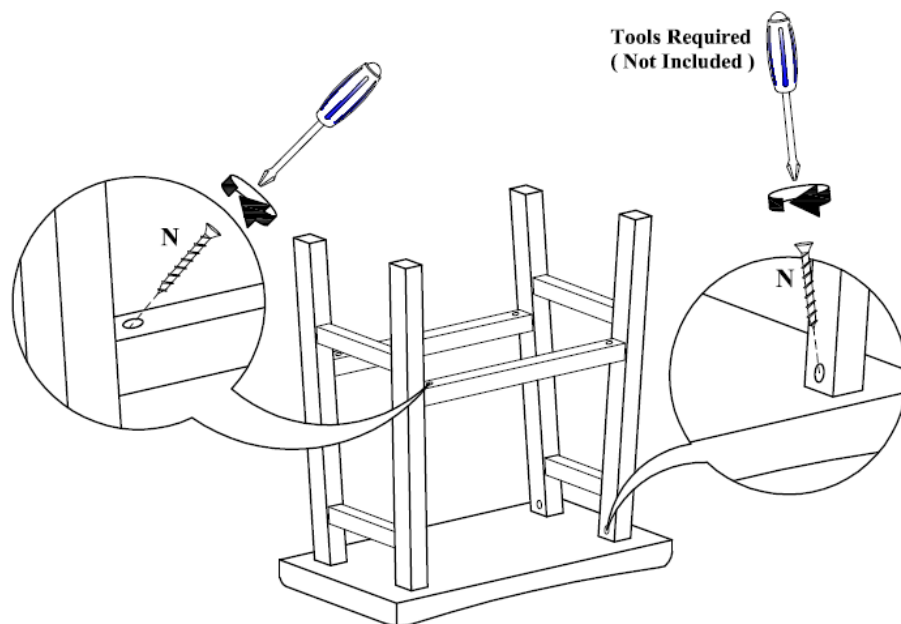

Use Screw (N) to fasten Leg Frames to Bench Seat and fasten Bench Stretcher (G) to Leg Frames as shown.  
**DO NOT USE THE BENCH UNTIL GLUE IS DRY.**