


DuraStyle Two-piece toilet for SensoWash® # 216051..00 / 216051..85

|< 14 1/8" Inch >|



Two-piece toilet for SensoWash®	Dimension	Weight	Order number
(without tank), syphonic, only in combination with SensoWash, 12" rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC listed			
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ 1.32/0.92 gpf, with dual flush piston valve, top flush	14 1/8" x 27 1/2" Inch	92 lb	21605100
♦ 1.28 gpf, with single flush piston valve, top flush	14 1/8" x 27 1/2" Inch	92 lb	21605185
Sanitary ceramics with the special WonderGliss surface finish v time to come. When ordering WonderGliss please add a "1" as eleventh digit t			
Mounting set for One-Piece and Two-Piece toilets, outlet 3/8" - male thread, wall connection 1/2" - female thread, 1/2", North American version		1.1 lb	001417
male thread, wall connection 1/2" - female thread, 1/2", North		1.1 lb	001417

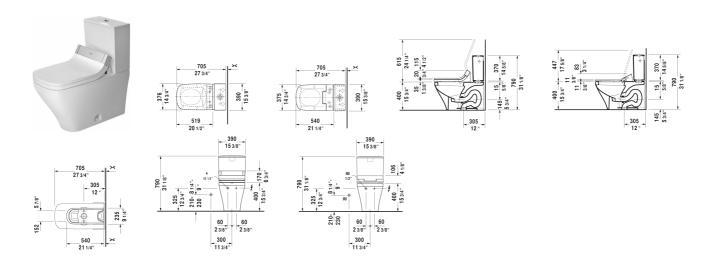

DuraStyle Two-piece toilet for SensoWash® # 216051..00 / 216051..85

|< 14 1/8" Inch >|

SensoWash Starck C shower-toilet seat for DuraStyle* with concealed connections, remote control included, power actuated lid and seat, rear-, front and oscillating wash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, self-cleaning wand, 2 individually programmable user profiles, night light, Quick release: easy seat unit removal and attachment, on / off-button, 14 3/4" x 20 1/2" Inch	14 3/4" x 20 1/2" Inch	610200
SensoWash Slim shower-toilet seat for DuraStyle* with concealed connections, remote control included, self-cleaning wand, locking function via remote control, rear-, front and oscillating wash, with slow close, night light, seat and lid easily removable with one hand, automatic drainage in periods of prolonged disuse, on / off-button, 14 3/4" x 21 1/4" Inch	14 3/4" x 21 1/4" Inch	611200

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.