Assembly Instructions

Caution: You must read this before you proceed.

BAR CART



CAUTION: This Bar Cart is NOT a TOY.

Keep your child / children at bay in the process of assembly.

For turning / flipping the Bar Cart and to prevent damage to the Bar Cart, two adults may be needed to execute this action.

Parts List			
No.	Picture	Description	QTY
А		Upper Tray	1
В		Lower Tray	1
С	<u> (6) </u>	Removable Tray	1
D	E P	Long Leg - RIGHT	1
E		Long Leg - LEFT	1
F		Short Leg - RIGHT	1
G	•	Short Leg- LEFT	1
Н	\circ	Wheel	4
I		Handle	1
J	4	Support Bar	4
K	[::::]	Bottle Holder	1
<u>Hardware</u>			
No.	Picture	Description	QTY
1	<u> </u>	Long Bolt (M6x45mm)	5
2	0)	Medium Bolt (M6x35mm)	9
3	<u> </u>	Short Bolt (M6x15mm)	3
4	0	Allen Screw (M7x40mm)	3
(5)		Sleeve Nut	7
6	(Thin Flat Washer (D4mm)	5
7	o	Thick Flat Washer (D2mm)	5
8		Metal Tube	5
9		Allen Key	2

Assembly Preparation Before Beginning Assembly:



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-



• Assemble on a clean non-marring surface (packing foam)-



Save all packaging until finished-


Assembly Steps

Step 1



Unpack and place all parts on a clean, non-marring surface.

Step 2

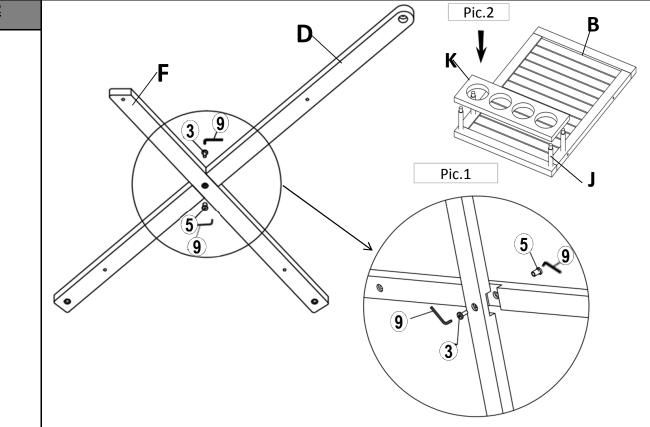


Align and intersect the halved joints of the Right Long Leg (D) and Right Short Leg (F) together. Insert the Short Bolt (\Im) and Sleeve Nut (\Im) through the mounting positions on the Right Long Leg (D) and Short Leg - Right (F) using Allen Keys (\Im) as shown in Pic.1.

Repeat the same process with the Long Leg- Left (E) and Short Leg - Left (G).

Insert four Support Bars(J) into mounting position of Lower Tray(B).

Place Bottle Holder(K) onto Support Bars(J) as show Pic.2.

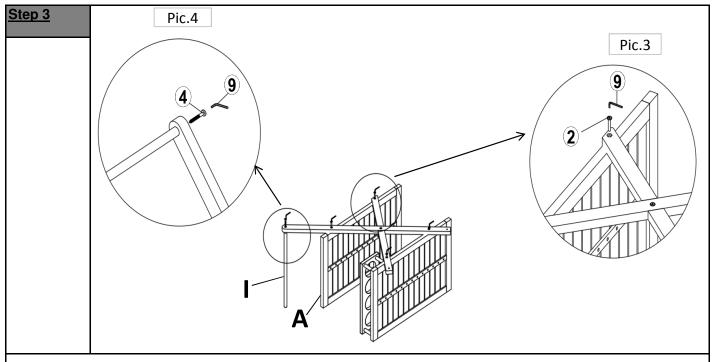


With the assistance from your partner, position Tray(A) and Tray(B) sideways as shown in the picture.

Place the Right Leg Frame onto the sides of the Trays and align the mounting positions. Loosely affix the Right Leg Frame to the Trays using Medium Bolts(2) with Allen Key (9) as shown in Pic.3.

Attach Handle (I) to Right Leg Frame using Allen Screw (4) with Allen Key (9). Carefully turn the Cart over and rest it on the other side.

Then, repeat the same process for the Left Leg Frame.

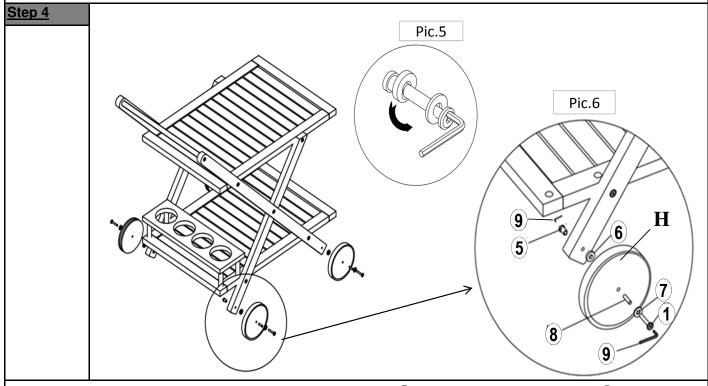

Secure Wheels(H) to Leg Frames, using Sleeve Nut (5), Thin Flat Washer Ring (6) Wheel (H), Metal Tube (8), Thick Flat Washer Ring (7) and Long Bolt(1), as shown in Pic. 6, then tighten with the Allen Keys (9).

Then, place the Removable Tray(C) onto Upper Tray(A) as shown above. Your Bar Cart is now ready for use.

##