

# PEERLESS

# Mounting without escutcheon plate: Min.2 1/2" (64 mm) Clearance to Back **←**(123 mm) Splash Recommended 3 1/16" (78 mm) 14 5/16" (203 mm) (364 mm) 9 7/16" (240 mm) 1 5/16"~1 1/2" (33~38mm) 3 3/4" Hole Size (96 mm) Max. Deck 29 1/2" **Thickness** (750 mm) 3/8" compression fitting

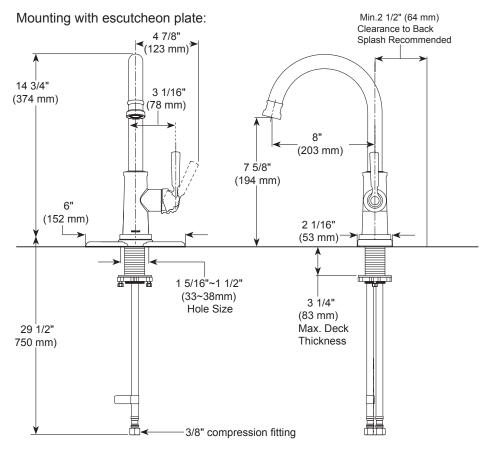

# ▲ Designate proper finish suffix

# P1923LF▲

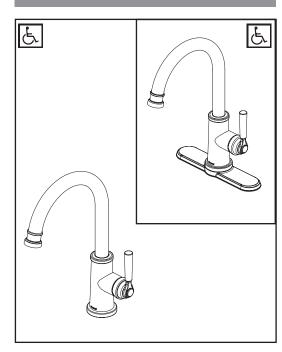

# KITCHEN FAUCETS

- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

## STANDARD SPECIFICATIONS:

- Maximum 1.5 qpm @ 60 psi, 5.7 L/min @ 414 kPa
- Solid brass casted body
- One or three hole mount (escutcheon optional, not included)
- Ceramic cartridge
- Spout rotates 360°
- Red/Blue indicator markings
- Polymer braided flexible supply hose with 3/8" compression fitting - 29 1/2" (750 mm) long

## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and inishes; or, for commercial users, for 5 years from the date of purchase.
  5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1