



Cinq® | K-37722-G

Square single-function filtered showerhead, 1.75 gpm

Features

- Contemporary square design
- Five-layer filtration system reduces scale buildup in your shower and reduces impurities such as chlorine and heavy metals
- Recommend replacing filter every six months for optimum performance
- Filter easily slides out with a 30° turn of the sprayface
- Optimized sprayface minimizes wasteful overspray and increases cleaning and hair-rinsing performance
- Full coverage spray produces an encompassing spray ideal for everyday use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar)
- Box includes: Showerhead, one filter, wrench, sealant tape
- K-33632 replacement filters available (sold separately)



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-21-2026 14:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 1.75 gpm (6.6 l/min)

Maximum Flow:

Material

- Premium material construction for durability and reliability
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-21-2026 14:00 - US-CA

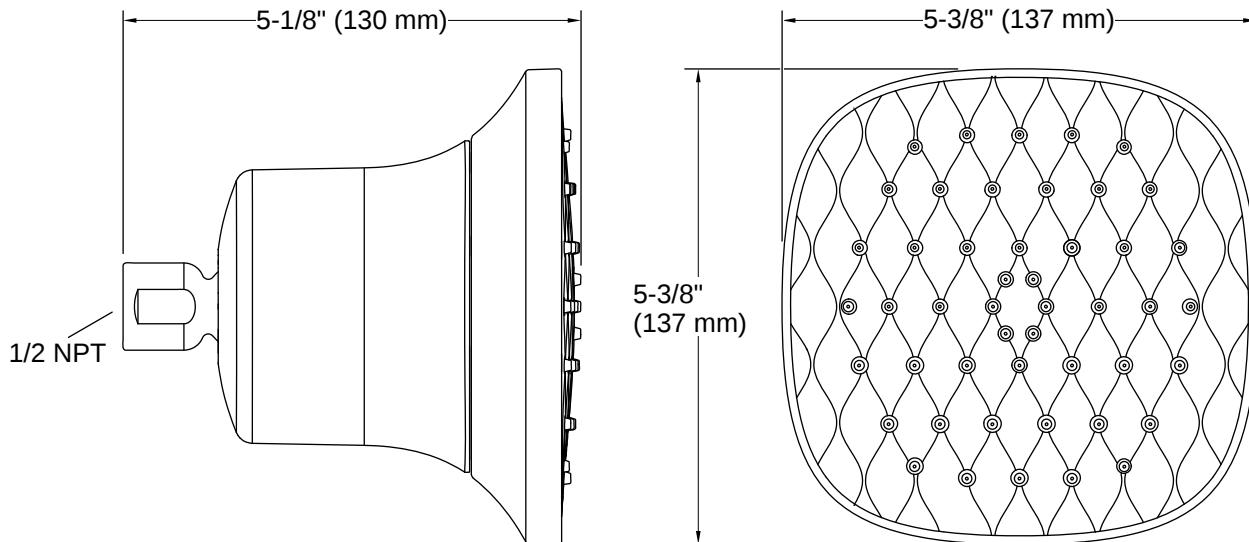

Installation

- 1/2" -14 NPT connection
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.4 gal/min (5.3 l/min) or less.

